



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 638 327 A1

(12)

**EUROPEAN PATENT APPLICATION**  
published in accordance with Art. 158(3) EPC

(43) Date of publication:  
**22.03.2006 Bulletin 2006/12**

(21) Application number: **04746299.9**

(22) Date of filing: **17.06.2004**

(51) Int Cl.:  
**H04N 5/93** <sup>(1980.01)</sup> **G11B 20/10** <sup>(1985.01)</sup>  
**G11B 20/12** <sup>(1985.01)</sup> **G11B 27/00** <sup>(1968.09)</sup>  
**G11B 27/34** <sup>(1968.09)</sup>

(86) International application number:  
**PCT/JP2004/008830**

(87) International publication number:  
**WO 2004/114658 (29.12.2004 Gazette 2004/53)**

(84) Designated Contracting States:  
**DE FR GB**

(30) Priority: **18.06.2003 JP 2003173208**

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.**  
**Kadoma-shi, Osaka 571-8501 (JP)**


(72) Inventors:  
• **IKEDA, Wataru**  
**Osaka-shi,**  
**Osaka 550-0003 (JP)**

• **OKADA, Tomoyuki**  
**Nara-shi**  
**Nara 631-0078 (JP)**  
• **UESAKA, Yasushi**  
**Sanda-shi,**  
**Hyogo 669-1348 (JP)**

(74) Representative: **Grünecker, Kinkeldey, Stockmair & Schwanhäusser**  
**Anwaltssozietät**  
**Maximilianstrasse 58**  
**80538 München (DE)**

(54) **REPRODUCTION DEVICE, PROGRAM, REPRODUCTION METHOD**

(57) When playing an AV Clip recorded on a BD-ROM, a judgment is made, for each elementary stream, which of a plurality of predetermined conditions the elementary stream satisfies. The plurality of predetermined conditions include (a) a condition that a playback apparatus has a capability of playing the elementary stream, (b) a language attribute of the elementary stream matches a language setting of the playback apparatus, and (c) a channel attribute of the elementary stream is surround sound and the playback apparatus has a surround output capability. The playback apparatus assigns a priority to each elementary stream based on which conditions the elementary stream satisfies, selects an elementary stream having a highest priority, and plays the selected elementary stream.

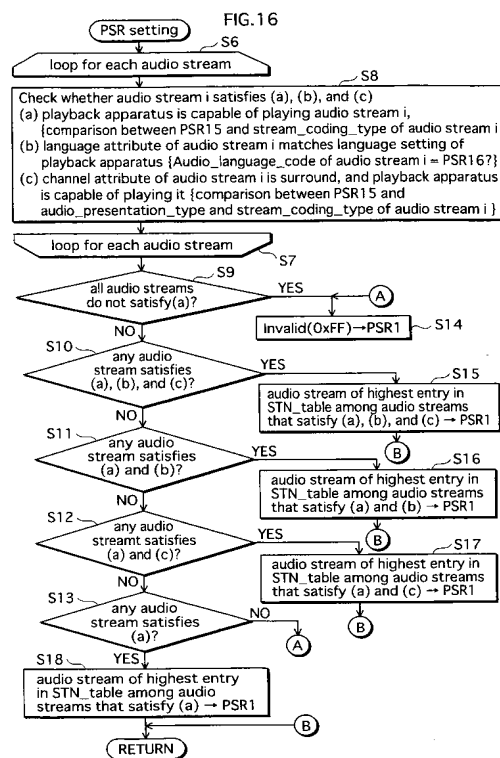

EP 1 638 327 A1

## Description

### Technical Field

**[0001]** The present invention relates to a playback apparatus for a recording medium, and in particular relates to improvements in a function of selecting one of a plurality of elementary streams and playing back the selected elementary stream.

### Background Art

**[0002]** In distribution of movie content in recent years, the number of streams multiplexed to form one digital stream is on the increase. In view of this, the stream selection function mentioned above is regarded as particularly important. The increase in the number of streams is due to an attempt to support every combination of codec, channel number, and language attribute.

**[0003]** Suppose there are three codecs AC-3 (2ch), AC-3 (5.1ch), and DTS (5.1ch), and two language attributes Japanese and English. In this case, six audio streams corresponding to six combinations of these codecs and language attributes are produced and multiplexed to form one digital stream. These audio streams have a specific numbering system. Accordingly, by setting a stream number of one of the audio streams in a status register in a playback apparatus so that the playback apparatus selects the audio stream identified by the stream number in the status register, the audio stream corresponding to the particular codec-language combination can be played at each playback session.

**[0004]** The status register used here is initialized upon factory shipment, and may be updated later by the user.

**[0005]** In the above playback apparatus, the status register is unchanged unless the user updates it. This being so, once the status register has been set to indicate, for example, AC-3 (2ch), even when content includes an AC-3 (5.1ch) audio stream, the AC-3 (5.1ch) audio stream is not played unless the user updates the status register. In this case, the AC-3 (5.1ch) audio stream is wasted. To avoid this, it may be suggested to provide the playback apparatus with a function of automatically setting the status register so as to utilize its AC-3 (5.1ch) playback capability.

**[0006]** However, not every content contains an AC-3 (5.1ch) audio stream. For example, an AC-3 (5.1ch) audio stream is certainly included in content of a recent hit movie, but may not be included in content of an old movie or an art film. If the status register automatic setting function operates when playing content that does not include an AC-3 (5.1ch) audio stream, the playback apparatus will end up selecting a nonexistent audio stream.

**[0007]** Conversely, it may be suggested to store, on a BD-ROM carrying an AC-3 (5.1ch) audio stream, information for automatically selecting the AC-3 (5.1ch) audio stream. However, not every playback apparatus has an AC-3 (5.1ch) decoding capability. If the BD-ROM in-

structs a playback apparatus without the AC-3 (5.1ch) decoding capability to select the AC-3 (5.1ch) audio stream, a problem occurs.

**[0008]** Thus, since not every content includes an AC-3 (5.1ch) audio stream and not every playback apparatus has an AC-3 (5.1ch) decoding capability, the user needs to set the status register in order to select an optimal audio stream at each playback session. A failure to do so often causes an AC-3 (5.1ch) audio stream to be wasted without being played back.

### Disclosure of Invention

**[0009]** The present invention aims to provide a playback apparatus that performs stream selection so as to make full use of advantages of both a recording medium and the playback apparatus.

**[0010]** The stated aim can be achieved by a playback apparatus including: a judgment unit operable to judge, for each elementary stream, which of a plurality of predetermined conditions the elementary stream satisfies; and a playback unit operable to assign a priority to each elementary stream according to a pattern of conditions the elementary stream satisfies, and select and play back a highest-priority elementary stream.

**[0011]** Each elementary stream is assigned a priority depending on which of the plurality of conditions the elementary stream satisfies. The plurality of conditions relate to a decoding capability of the playback apparatus, a language setting of the playback apparatus, and a surround output capability of the playback apparatus. If an AC-3 (5.1ch) elementary stream included in the digital stream satisfies all of these conditions, the AC-3 (5.1ch) elementary stream is assigned a highest priority and selected for playback. If the playback apparatus does not have an AC-3 (5.1ch) playback capability, on the other hand, an elementary stream that is decodable by the playback apparatus and matches the language setting of the playback apparatus is selected for playback.

**[0012]** Thus, a priority is assigned to each audio stream depending on which conditions the audio stream satisfies, and a highest-priority audio stream is selected for playback. This is a shift from a conventional idea of simply selecting a playable audio stream, to an idea of selecting such an audio stream that fully exploits the capabilities of the playback apparatus.

### Brief Description of Drawings

#### **[0013]**

FIG. 1A shows an example of use of a playback apparatus to which the present invention relates.

FIG. 1B shows keys on a remote control 400 for receiving a user operation on an Interactive Display.

FIG. 2 shows a structure of a BD-ROM.

FIG. 3 shows a representation of how an AV Clip is formed.

FIG. 4 shows a structure of Clip information.

FIG. 5 shows a structure of PlayList information.

FIG. 6 shows a representation of indirect referencing by PlayList information.

FIG. 7 shows a representation of synchronization of a SubPlayItem using a sync\_PlayItem\_id and a synch\_start\_PTS\_of\_PlayItem.

FIG. 8 shows a structure of an STN\_table.

FIG. 9A shows an entry-attribute combination corresponding to a video stream.

FIG. 9B shows an entry-attribute combination corresponding to an audio stream.

FIG. 9C shows an entry-attribute combination corresponding to a PG stream.

FIG. 9D shows an entry-attribute combination corresponding to textST stream.

FIG. 9E shows an entry-attribute combination corresponding to an IG stream.

FIG. 10 shows a structure of PlayList information preloaded on an HD.

FIG. 11 shows file designation by Clip\_Information\_file\_names in the PlayList information on the HD.

FIG. 12 shows an internal construction of the playback apparatus to which the present invention relates.

FIG. 13 shows detailed settings of PSR1, PSR2, PSR15, PSR16, and PSR30.

FIG. 14 shows detailed settings of PSR4 to PSR8.

FIG. 15A shows status transitions that can be made by PSR1.

FIG. 15B is a flowchart of "Procedure when playback condition is changed" for PSR1.

FIG. 16 is a flowchart of a detailed procedure of step S5.

FIG. 17 shows combinations of playback capabilities and stream attributes in a tabular form.

FIG. 18 shows audio stream selection based on an order of entries in an STN\_table.

FIG. 19 is a flowchart of "Procedure when change is requested" for PSR1.

FIGS. 20A to 20C show a first specific example of audio stream selection according to "Procedure when playback condition is changed".

FIGS. 21A to 21C show a second specific example of audio stream selection according to "Procedure when playback condition is changed".

FIGS. 22A to 22C show a third specific example of audio stream selection according to "Procedure when playback condition is changed".

FIG. 23A shows status transitions that can be made by PSR2.

FIG. 23B is a flowchart of "Procedure when playback condition is changed" for PSR2.

FIG. 24 is a flowchart of "Procedure when change is requested" for PSR2.

FIG. 25 is a flowchart of an operation of setting PSR2.

FIGS. 26A to 26C show a specific example of

PG\_textST\_stream selection according to "Procedure when playback condition is changed".

FIG. 27 shows PG\_textST\_stream selection based on an order of entries in an STN\_table.

FIG. 28 shows a structure of PlayList information in a second embodiment of the present invention.

FIG. 29 shows a file structure in the second embodiment.

FIGS. 30A and 30B show multi-angle and non-multi-angle blocks.

FIG. 31 shows detailed settings of PSR3.

FIG. 32A shows status transitions that can be made by PSR3.

FIG. 32B is a flowchart of "Procedure when playback condition is changed" for PSR3.

FIG. 32C is a flowchart of "Procedure when change is requested" for PSR3.

FIGS. 33A and 33B show how angle blocks are selected.

FIG. 34 shows an IG stream and an ICS in the IG stream.

FIG. 35 shows a structure of button\_info.

FIG. 36 shows a relationship between an ICS and ODSs in DS<sub>n</sub>.

FIG. 37 shows overlaying performed with a presentation timing of picture data pt1.

FIG. 38 shows status transitions of Buttons 1-A to 1-D.

FIG. 39 shows an example of settings of button\_info in an ICS.

FIG. 40 shows display switching from Page 1 to Page 2.

FIG. 41 shows detailed settings of PSR0, PSR10, and PSR11.

FIG. 42A shows status transitions that can be made by PSR0.

FIG. 42B is a flowchart of "Procedure when playback condition is changed" for PSR0.

FIG. 43 is a flowchart of "Procedure when change is requested" for PSR0.

FIG. 44 shows an internal structure of an Interactive Graphics Decoder 13.

FIG. 45 is a flowchart of a synchronous control procedure using time stamps.

FIG. 46 is a flowchart of an initial display procedure.

FIG. 47 is a flowchart of an auto-activation procedure.

FIG. 48 is a flowchart of an animation display procedure.

FIG. 49 is a flowchart of a button command execution procedure.

FIG. 50 is a flowchart of an UO procedure.

FIG. 51 is a flowchart of a current button switching procedure.

FIG. 52 shows key operations performed by the user when viewing a drama series.

FIG. 53 shows how Pages 1 to 4 shown in FIG. 52 are assigned to a selection menu and a chapter

menu.

FIG. 54 shows procedures defined by button commands to achieve focus shifts.

FIG. 55 shows focus shifts performed according to focus positions on previous Pages.

FIG. 56 shows bugs that can occur in focus shifts.

FIG. 57A shows status transitions that can be made by PSR11.

FIG. 57B is a flowchart of "Procedure when playback condition is changed" for PSR11.

FIG. 57C is a flowchart of "Procedure when change is requested" for PSR11.

FIG. 58A shows status transitions that can be made by PSR10.

FIG. 58B is a flowchart of "Procedure when playback condition is changed" for PSR10.

FIG. 59 is a flowchart of "Procedure when change is requested" for PSR10.

## Best Mode for Carrying out the Invention

### First Embodiment

**[0014]** The following describes embodiments of a playback apparatus to which the present invention relates. First, an example of an act of using the playback apparatus according to the present invention is explained. FIG. 1 shows an example of use of the playback apparatus according to the present invention. In the drawing, the playback apparatus according to the present invention is a playback apparatus 200, which constitutes a home theater system together with a television 300 and a remote control 400.

**[0015]** A BD-ROM 100 is used for providing a movie film in the home theater system that is constituted by the playback apparatus 200, the television 300, and the remote control 400.

**[0016]** The remote control 400 receives a user operation directed to the playback apparatus 200. FIG. 1B shows keys on the remote control 400 for receiving a user operation on an Interactive Display. As illustrated, the remote control 400 has a Move Up key, a Move Down key, a Move Right key, a Move Left key, an audio switch key for receiving an audio switching operation, a subtitle switch key for receiving a subtitle switching operation, and numeric keys "0" to "9".

**[0017]** This concludes the description of the act of using the playback apparatus according to the present invention.

**[0018]** The BD-ROM which is a recording medium to be played back by the playback apparatus according to the present invention is described next. FIG. 2 shows a structure of the BD-ROM. In the drawing, the fourth level shows the BD-ROM, and the third level shows a track on the BD-ROM. The track is shown as being stretched out into a straight line, though in actuality the track spirals outwards from the center of the BD-ROM. The track includes a lead-in area, a volume area, and a lead-out area.

The volume area has a layer model of a physical layer, a file system layer, and an application layer. The first level shows a format of the application layer (application format) of the BD-ROM in a directory structure. As illustrated, the BD-ROM has a BDMV directory below a ROOT directory. The BDMV directory contains files such as YYY.MPLS, XXX.CLPI, XXX.M2TS, ZZZ.M2TS, and ZZZ.CLPI. The XXX.M2TS file corresponds to an AV Clip, and the XXX.CLPI file corresponds to Clip information.

**[0019]** The recording medium according to the present invention can be realized by generating such an application format.

### <Structure of the AV Clip>

**[0020]** The AV Clip which is one of the components (AV Clip and Clip information) of content of the movie film is described below.

**[0021]** FIG. 3 shows a representation of how the AV Clip is formed.

**[0022]** The AV Clip (middle level) can be created as follows. A video stream made up of a plurality of video frames (pictures pj1, pj 2, pj3, ...) and an audio stream made up of a plurality of audio frames (upper first level) are each converted to PES packets (upper second level), and further converted to TS packets (upper third level). Likewise, a Presentation graphics stream (PG stream) for subtitles and an Interactive graphic stream (IG stream) for Interactive Displays (lower first level) are converted to PES packets (lower second level), and further converted to TS packets (lower third level). These TS packets of the video, audio, and PG and IG streams are then multiplexed to form the AV Clip.

**[0023]** Here, not only the PG stream multiplexed in the AV Clip but also a textST stream forms subtitles. The textST stream is a data string that represents subtitles by text data. The textST stream is called a subClip, and is recorded on the BD-ROM or an HD in the playback apparatus by a filename different from that of the AV Clip. The PG stream and the textST stream which form subtitles are both called a PG\_textST\_stream. This concludes the description of the AV Clip.

### <Structure of the Clip Information>

**[0024]** The following describes the XXX.CLPI file.

**[0025]** The Clip information (XXX.CLPI) is management information for the individual AV Clip. FIG. 4 shows a structure of the Clip information. Dotted guidelines in the drawing indicate the structure of the Clip information in more detail. As indicated by guideline hn1, the Clip information (XXX.CLPI) includes Program.Info and an EP\_map used for searching the video stream for a start of an I picture.

**[0026]** The Program.Info is information showing a PID and an attribute of each individual elementary stream multiplexed in the AV Clip, in association with a

Stream\_index. The Stream\_index is an index of each individual elementary stream multiplexed in the AV Clip corresponding to this Clip information. PIDs of the individual elementary streams identified by Stream\_indices are shown in Stream\_PID [Stream\_index] entries indicated by guideline hn2.

**[0027]** Also, attributes of the individual elementary streams identified by the Stream\_indices are shown in Stream\_Attribute [Stream\_index] entries indicated by guideline hn3. The attributes include video attributes, audio attributes, and graphics attributes. The video attributes show a method used for compressing a video stream (Coding), a resolution of picture data which composes the video stream (Resolution), an aspect ratio of the picture data (Aspect), a frame rate of the picture data (Framerate), and the like. The audio attributes show a method used for compressing an audio stream (Coding), a channel attribute of the audio stream (Ch.), a language attribute of the audio stream (Lang), and the like. Through the use of a stream\_index, an attribute of an elementary stream can be retrieved from the Program-Info.

**[0028]** The EP\_map is a reference table for indirect referencing of addresses of a plurality of locations to which a skip operation is likely to be made, using time information. As indicated by guideline hn5, the EP\_map includes a plurality of entries (ACCESS UNIT #1 entry, ACCESS UNIT #2 entry, ACCESS UNIT #3 entry, ...) and the number of entries (Number).

**[0029]** As indicated by guideline hn6, each of the entries shows a playback start time of a corresponding I picture, together with an address of the I picture and a size of the I picture (I-Size). The playback start time of the I picture is expressed using a time stamp (Presentation Time Stamp) of the I picture. The address of the I picture is expressed using a serial number (SPN (Source Packet Number)) of a TS packet corresponding to the I picture. It should be noted here that the filename XXX of the Clip information XXX.CLPI is the same as the filename of the AV Clip corresponding to the Clip information. Which is to say, the filename XXX of the Clip information in FIG. 4 means the Clip information corresponds to the AV Clip XXX.M2TS. This concludes the description of the Clip information.

<ZZZ.M2TS and ZZZ.CLPI>

**[0030]** The following describes the ZZZ.M2TS file and the ZZZ.CLPI file. The subClip (ZZZ.M2TS) is a file storing a stream that is played synchronously with the AV Clip. A representative of such a subClip is the aforementioned textST stream. Other subClips include an audio stream and an IG stream. The AV Clip shown in FIG. 3 is hereafter also called a main Clip, to distinguish it from the subClip.

**[0031]** The Clip information (ZZZ.CLPI) is Clip information corresponding to the subClip.

<Structure of the PlayList information>

**[0032]** The following describes the YYY.MPLS file. The PlayList information (YYY.MPLS) is information which defines a combination of two types of playback paths that are a main path and a SubPath, as a PlayList (PL). FIG. 5 shows a data structure of the PlayList information. As shown in the drawing, the PlayList information includes PlayItem information #1, #2, ..., #m for defining the main path and SubPath information #1, #2, ..., #p each for defining the SubPath.

**[0033]** The main path is a playback path defined on an AV Clip which is the main Clip, whereas the SubPath is a playback path defined on a subClip.

**[0034]** The main path is explained first. The main path is defined by a plurality of sets of PlayItem information (PlayItem information #1, #2, #3, ..., #m) and the number of sets of PlayItem information (Number). PlayItem information defines at least one logical playback section included in the main path. Guideline hs1 indicates a detailed structure of the PlayItem information. As illustrated, the PlayItem information includes a Clip\_Information\_file\_name field showing a filename of Clip information of the AV Clip to which an IN point and an OUT point of the playback section belong, a Clip\_codec\_identifier field showing a coding method of the AV Clip, an IN\_time field which is time information indicating a start of the playback section, an OUT\_time field which is time information indicating an end of the playback section, and an STN\_table field showing, among the elementary streams in the AV Clip and its related subClip, elementary streams from which the playback apparatus can select for presentation of the PlayItem.

**[0035]** The PlayItem information has a feature of being written based on conversion from time information to an addresses. In other words, the playback section is defined in the form of indirect referencing that uses the EP\_map as a reference table. FIG. 6 shows a representation of indirect referencing by PlayList information. In the drawing, the AV Clip is composed of a plurality of TS packets. The EP\_map in the Clip information specifies sector addresses of TS packets that correspond to starts of I pictures, as indicated by arrows ay1, ay2, ay3, ay4, .... Arrows jy1, jy2, jy3, jy4, ... indicate a representation of referencing of TS packets by PlayItem information. It can be understood from the drawing that the referencing by the PlayItem information (indicated by arrows jy1, jy2, jy3, jy4, ...) is indirect referencing that specifies addresses of TS packets in the AV Clip through the EP\_map.

**[0036]** A playback section on the BD-ROM, which is obtained by a combination of PlayItem information, Clip information, and an AV Clip, is called a PlayItem. The movie film recorded on the BD-ROM is composed of PlayItems. Since the movie film recorded on the BD-ROM is composed of logical playback units, "sharing", i.e. an AV Clip which forms a scene of one movie film being referenced by another movie film, can be efficiently conducted.

ed.

**[0037]** The variation in movie films can be widened just by defining various kinds of PlayList information, which enables movie film producers to extend the range of expression. This is a greatest advantage of static scenario. Playback units of BD-ROMs include not only a PlayItem but also a Title and a Chapter. The Title is a playback unit corresponding to one movie film, and is composed of at least one set of PlayList information. The Chapter is a playback unit corresponding to one chapter of a movie film, and is defined by information called Mark information.

**[0038]** The filename YYY of the PlayList information represents a three-digit ID number assigned to the PlayList information in the BD-ROM. Which is to say, the PlayList information shown in FIG. 6 is uniquely identified by this ID number YYY. The use of "YYY" as the ID number of the PlayList information indicates that the ID number of the PlayList information has a different numbering system from the ID number XXX of the AV Clip and the Clip information (though the number of digits of the ID number is three in this example, the number of digits is not limited to such).

**[0039]** This concludes the description of the main path. The SubPath is described next.

<SubPath>

**[0040]** Guideline hc1 in FIG. 5 indicates a structure of SubPath information in detail. As illustrated, the SubPath information is made up of at least one set of SubPlayItem information. SubPlayItem information includes a Clip\_Information\_file\_name field, a Clip\_codec\_identifier field, a SubPlayItem\_IN\_time field, a SubPlayItem\_OUT\_time field, a sync\_PlayItem\_id field, and a sync\_start\_PTS\_of\_PlayItem field, as indicated by guideline hc2.

**[0041]** The Clip\_Information\_file\_name field shows a filename of Clip information of a subClip corresponding to the SubPlayItem, to thereby uniquely identify the subClip.

**[0042]** The Clip\_codec\_identifier field shows a coding method of the subClip.

**[0043]** The SubPlayItem\_IN\_time field is time information indicating a start of the SubPlayItem on a playback time axis of the subClip.

**[0044]** The SubPlayItem\_OUT\_time field is time information indicating an end of the SubPlayItem on the playback time axis of the subClip.

**[0045]** The sync\_PlayItem\_id field uniquely identifies one of the PlayItems in the main path with which the SubPlayItem is to be synchronized. The SubPlayItem\_IN\_time is present on a playback time axis of the PlayItem identified by the sync\_PlayItem\_id.

**[0046]** The sync\_start\_PTS\_of\_PlayItem field specifies the start of the SubPlayItem indicated by the SubPlayItem\_IN\_time, on the playback time axis of the PlayItem identified by the sync\_PlayItem\_id. When the

current playback time has reached a point specified by this sync\_start\_PTS\_of\_PlayItem on the playback time axis of the PlayItem, the playback of the SubPlayItem is launched.

**[0047]** FIG. 7 shows a representation of synchronization of the SubPlayItem according to the sync\_PlayItem\_id and the sync\_start\_PTS\_of\_PlayItem. In the drawing, the main path is made up of PlayItems #1, #2, and #3. The sync\_PlayItem\_id and the sync\_start\_PTS\_of\_PlayItem of the SubPlayItem which forms a SubPath are set as shown in dotted box wh1. In detail, the sync\_PlayItem\_id is set to specify PlayItem #1, and the sync\_start\_PTS\_of\_PlayItem is set to specify time t1 on the playback time axis of PlayItem #1. This being the case, when the current playback time has reached t1 on the playback time axis of PlayItem #1, playback of a part of the subClip (textST stream), specified by the Clip\_Information\_file\_name, from the SubPlayItem\_IN\_time to the SubPlayItem\_OUT\_time is launched. As a result, the part of the textST stream from the SubPlayItem\_IN\_time to the SubPlayItem\_OUT\_time is played synchronously with the AV Clip. This concludes the description of the SubPath information.

**[0048]** The STN\_table field included in the PlayItem information described above provides information used for status settings, and is an essential feature of the present invention. The following describes the STN\_table in detail.

<STN\_table>

**[0049]** The STN\_table shows elementary streams available for presentation, among elementary streams multiplexed in the AV Clip specified by the Clip\_Information\_file\_name of the PlayItem and elementary streams in a subClip specified by the Clip\_Information\_file\_name of a SubPlayItem relating to the PlayItem. The STN\_table is formed by associating an entry of each elementary stream with its attribute. An elementary stream available for presentation is mainly an elementary stream multiplexed in the AV Clip specified by the PlayItem, but may also include an elementary stream (textST stream) recorded separately from the AV Clip but played together with the AV Clip.

**[0050]** FIG. 8 shows a structure of the STN\_table. As shown in the drawing, the STN\_table includes a plurality of combinations of entries and attributes (entry-attribute), and the numbers of entry-attribute combinations (number\_of\_video\_stream\_entries, number\_of\_audio\_stream\_entries, number\_of\_PG\_textST\_stream\_entries, and number\_of\_IG\_stream\_entries).

**[0051]** The entry-attribute combinations correspond to a video stream, audio streams, PG\_textST\_streams, and IG streams that are available for presentation in the PlayItem, as indicated by the parenthesis "{".

**[0052]** The entry-attribute combinations are explained in detail below. FIGS. 9A to 9D show the entry-attribute

combinations in detail.

**[0053]** FIG. 9A shows an entry-attribute combination corresponding to a video stream.

**[0054]** An entry in this entry-attribute combination corresponding to the video stream includes a `ref_to_stream_PID_of_mainClip` field showing a PID used for extracting the video stream when demultiplexing the AV Clip.

**[0055]** An attribute in the entry-attribute combination corresponding to the video stream includes a `stream_coding_type` field which is set to 0x02, and a `frame_rate` field showing a display rate of the video stream.

**[0056]** FIG. 9B shows an entry-attribute combination corresponding to an audio stream.

**[0057]** An entry in the entry-attribute combination corresponding to the audio stream includes a `ref_to_stream_PID_of_mainClip` field showing a PID used for extracting the audio stream when demultiplexing the AV Clip.

**[0058]** An attribute in the entry-attribute combination corresponding to the audio stream includes a `stream_coding_type` field which is set to one of 0x80 (Linear PCM), 0x81 (AC-3), and 0x82 (DTS) to indicate a coding type of the audio stream, an `audio_presentation_type` field showing a channel structure of the audio stream and indicating whether surround output is possible, and an `audio_language_code` field showing a language attribute of the audio stream.

**[0059]** FIG. 9C shows an entry-attribute combination corresponding to a PG stream.

**[0060]** An entry in the entry-attribute combination corresponding to the PG stream includes a `ref_to_stream_PID_of_mainClip` field showing a PID used for extracting the PG stream when demultiplexing the AV Clip.

**[0061]** An attribute in the entry-attribute combination corresponding to the PG stream includes a `stream_coding_type` field which is set to 0x90 indicating a PG stream codec, and a `PG_language_code` field showing a language attribute of the PG stream.

**[0062]** FIG. 9D shows an entry-attribute combination corresponding to a textST stream.

**[0063]** An entry in the entry-attribute combination corresponding to the textST stream includes a `ref_to_subClip_entry_id` field showing an entry identifier of a subClip storing the textST stream, a `ref_to_SubPath_id` field showing an ID of SubPath information, and a `ref_to_stream_PID_of_subClip` field showing a PID of the textST stream.

**[0064]** An attribute in the entry-attribute combination corresponding to the textST stream includes a `stream_coding_type` field which is set to 0x92 indicating a textST stream codec, a `character_code` field showing a character code of the textST stream, and a `textST_language_code` field showing a language attribute of the textST stream.

**[0065]** FIG. 9E shows an entry-attribute combination corresponding to an IG stream.

**[0066]** An entry in the entry-attribute combination corresponding to the IG stream includes a `ref_to_stream_PID_of_mainClip` field showing a PID used for extracting the IG stream when demultiplexing the AV Clip.

**[0067]** An attribute in the entry-attribute combination corresponding to the IG stream includes a `stream_coding_type` field which is set to 0x91 indicating an IG stream codec, and an `IG_language_code` field showing a language attribute of the IG stream. This concludes the description of the data structure of the entry-attribute combination of each elementary stream. The order of entries in the STN\_table is interpreted as the order of priorities in stream selection. Also, entries of textST streams and PG streams are put in one group in the STN\_table in order to treat the PG streams and the textST streams on an equal basis and determine which stream out of the PG streams and the textST streams has a higher priority. For example, if a textST stream has a higher entry than a PG stream in the group of entries for PG\_textST\_streams in the STN\_table, the textST stream is selected over the PG stream. Conversely, if the PG stream has a higher entry than the textST stream in the STN\_table, the PG stream is selected over the textST stream.

**[0068]** The above STN\_table is provided for each set of Playlist information. Therefore, there may be a case where an entry of one elementary stream is high in an STN\_table of one set of Playlist information but low in an STN\_table of another set of Playlist information.

**[0069]** This concludes the description of the data structure of the application format in the BD-ROM. It should be noted here that the recording medium to be played back by the playback apparatus according to the present invention is not limited to the BD-ROM, but also includes the HD in the playback apparatus. Data recorded on the HD is explained below. The HD stores a file containing a subClip, a file containing Clip information, and a file containing Playlist information, too. These files are preloaded onto the HD via a network. FIG. 10 shows a structure of such preloaded Playlist information. As shown in the drawing, the preloaded Playlist information has a similar structure to the Playlist information on the BD-ROM shown in FIG. 5. The difference from the one shown in FIG. 5 lies in that a `Clip_Information_file_name` in `PlayItem` information and a `Clip_Information_file_name` in `SubPlayItem` information can each designate Clip information on any of the BD-ROM and the HD. To designate Clip information on the BD-ROM, a full path of a file on the BD-ROM needs not be used in the preloaded Playlist information. This is because the playback apparatus recognizes the BD-ROM and the HD together as one virtual drive (called a virtual package). Accordingly, a `Clip_Information_file_name` in `PlayItem` information and a `Clip_Information_file_name` in `SubPlayItem` information in the preloaded Playlist information can designate an AV Clip on any of the HD and BD-ROM, by using a file body, such as XXX or ZZZ, of a file containing

Clip information. FIG. 11 shows designation of files by Clip\_Information\_file\_names in PlayList information on the HD. In the drawing, arrows rf1, rf2, and rf3 indicate file designation by Clip\_Information\_file\_names in PlayItem information in the PlayList information, and arrows pf1, pf2, and pf3 indicate file designation by Clip\_Information\_file\_names in SubPlayItem information in the PlayList information. Through such file designation by Clip\_Information\_file\_names, a SubPath defined on a subClip on the HD can be played synchronously with a main path defined on a main Clip on the BD-ROM.

**[0070]** Note that the data structures explained above are instances of class structures written in a programming language. The author writes the class structures to create these data structures on the BD-ROM.

**[0071]** This concludes the description of the recording medium. The following describes the playback apparatus according to the present invention. FIG. 12 shows an internal construction of the playback apparatus according to the present invention. The playback apparatus according to the present invention is manufactured based on this internal construction. The playback apparatus is roughly made up of two parts that are a system LSI and a drive device. The playback apparatus can be manufactured by mounting these parts on a cabinet and substrate of the apparatus. The system LSI is an integrated circuit including various processing units for achieving the functions of the playback apparatus. The playback apparatus includes a BD drive 1, a Read Buffer 2, a Demultiplexer 3, a Video Decoder 4, a Video Plane 5, a Presentation Graphics Decoder 9, a Presentation Graphics Plane 10, an adder 11, a Font Generator 12, an Interactive Graphics Decoder 13, a switch 14, an Interactive Graphics Plane 15, an adder 16, an HDD 17, a Read Buffer 18, a Demultiplexer 19, an Audio Decoder 20, a scenario memory 23, a control unit 24, a switch 25, a CLUT unit 26, a CLUT unit 27, a PSR set 28, and an operation reception unit 29. The control unit 24 includes a transition control unit 30.

**[0072]** The BD drive 1 performs loading and ejecting of the BD-ROM, and accesses to the BD-ROM.

**[0073]** The Read Buffer 2 is a FIFO memory. Accordingly, TS packets read from the BD-ROM are removed from the Read Buffer 2 in a same order as they arrive.

**[0074]** The Demultiplexer (Demux) 3 reads TS packets from the Read Buffer 2 and converts the TS packets to PES packets. The Demultiplexer 3 outputs PES packets having a stream ID designated by the control unit 24 to one of the Video Decoder 4, the Audio Decoder 20, the Presentation Graphics Decoder 9, and the Interactive Graphics Decoder 13.

**[0075]** The Video Decoder 4 decodes PES packets output from the Demultiplexer 3 to obtain uncompressed pictures, and writes the uncompressed pictures to the Video Plane 5.

**[0076]** The Video Plane 5 is a plane for storing uncompressed pictures. Here, a plane is a memory area used for storing one screen of pixel data in the playback ap-

paratus. By providing the playback apparatus with a plurality of planes and adding the storage contents of these planes for corresponding pixels, an image output in which a plurality of images are overlaid on each other can be produced. The Video Plane 5 has a resolution of  $1920 \times 1080$ , and picture data stored on the Video Plane 5 is composed of pixel data expressed by 16-bit YUV values.

**[0077]** The Presentation Graphics Decoder 9 decodes a graphics stream read from the BD-ROM or the HD to obtain uncompressed graphics, and writes the uncompressed graphics to the Presentation Graphics Plane 10. As a result of decoding the graphics stream, subtitles are displayed on the screen.

**[0078]** The Presentation Graphics Plane 10 is a memory having one screen of area, and is capable of storing one screen of uncompressed graphics. The Presentation Graphics Plane 10 has a resolution of  $1920 \times 1080$ , and each pixel in the uncompressed graphics on the Presentation Graphics Plane 10 is expressed by an 8-bit index color. By converting the index color using a CLUT (Color Lookup Table), the uncompressed graphics on the Presentation Graphics Plane 10 is presented for display.

**[0079]** The adder 11 overlays the storage contents of the Presentation Graphics Plane 10 on uncompressed picture data (i).

**[0080]** The Font Generator 12 develops text code included in a textST stream to a bitmap, using a character font.

**[0081]** The Interactive Graphics Decoder 13 decodes an IG stream read from the BD-ROM or the HD to obtain uncompressed graphics, and writes the uncompressed graphics to the Interactive Graphics Plane 15.

**[0082]** The switch 14 selectively writes one of a font string generated by the Font Generator 12 and graphics generated by the Presentation Graphics Decoder 9, to the Presentation Graphics Plane 10.

**[0083]** The Interactive Graphics Plane 15 is used for storing uncompressed graphics obtained by the Interactive Graphics Decoder 13.

**[0084]** The adder 16 overlays the storage contents of the Interactive Graphics Plane 15, on picture data (ii) which is generated by overlaying the storage contents of the Presentation Graphics Plane 10 on the uncompressed picture data (i).

**[0085]** The HDD 17 is the aforementioned HD included in the playback apparatus. By reading the storage contents of the HDD 17 and dynamically combining them with the storage contents of the BD-ROM, a graphics stream or a textST stream not recorded on the BD-ROM can be presented.

**[0086]** The Read Buffer 18 is a FIFO memory. Accordingly, TS packets read from the HDD 17 are removed from the Read Buffer 18 in the same order as they arrive.

**[0087]** The Demultiplexer (Demux) 19 reads TS packets from the Read Buffer 18 and converts the TS packets to PES packets. The Demultiplexer 19 outputs PES packets having a stream ID designated by the control unit 24, to the Font Generator 12.



**[0088]** The Audio Decoder 20 decodes PES packets output from the Demultiplexer 3, and outputs uncompressed audio data.

**[0089]** The scenario memory 23 is used for storing current PlayList information and current Clip information. The current PlayList information refers to PlayList information that relates to the current playback, among a plurality of sets of PlayList information recorded on the BD-ROM. The current Clip information refers to Clip information that relates to the current playback, among a plurality of sets of Clip information recorded on the BD-ROM.

**[0090]** The control unit 24 controls reading of an AV Clip from the BD-ROM and playback of the AV Clip, according to the current PlayList information and the current Clip information on the scenario memory 23. In detail, the control unit 24 detects the current PlayItem in the current PlayList information. With reference to the current Clip information identified by a Clip\_Information\_file\_name of the current PlayItem, the control unit 24 controls the BD-ROM drive 1 to read TS packets from an IN\_time to an OUT\_time of the current PlayItem, from an AV Clip specified by the current Clip information. The read TS packets are output selectively to the Video Decoder 4, the Presentation Graphics Decoder 9, the Interactive Graphics Decoder 13, and the Audio Decoder 20 via the Demultiplexer 3, to play the AV Clip.

**[0091]** If the current PlayList information includes a SubPlayItem to be synchronized with the current PlayItem, the control unit 24 plays a subClip specified by the SubPlayItem synchronously with the main Clip. This synchronization is conducted by playing back data from a SubPlayItem\_IN\_time to a SubPlayItem\_OUT\_time of the SubPlayItem when picture data corresponding to a sync\_start\_PTS\_of\_PlayItem of the SubPlayItem is read from the main Clip.

**[0092]** The switch 25 selectively feeds various data read from the BD-ROM and the HD to the Read Buffer 2, the Read Buffer 18, and the scenario memory 23.

**[0093]** The CLUT unit 26 converts index colors of the uncompressed graphics stored on the Video Plane 5, to Y, Cr, and Cb values.

**[0094]** The CLUT unit 27 converts index colors of the uncompressed graphics stored on the Interactive Graphics Plane 15, to Y, Cr, and Cb values.

**[0095]** The PSR set 28 is a register equipped in the playback apparatus, and is composed of 64 Player Status Registers (PSRs) and 4096 General Purpose Registers (GPRs). A definition of a value of each PSR will be explained in detail later.

**[0096]** The operation reception unit 29 outputs, when an operation of selecting a stream or the like is made on the remote control or a front panel of the playback apparatus, user operation information indicating the operation to the control unit 24.

**[0097]** The transition control unit 30 is included in the control unit 24. The transition control unit 30 extracts a stream\_PID of an entry-attribute combination corre-

sponding to a PSR from an STN\_table in the current PlayItem information, and outputs the extracted stream\_PID to the Demultiplexer 3 or 19. Since the setting of the Stream\_PID in the Demultiplexer 3 or 19 is based on the PSR, the transition control unit 30 performs a setting operation on the PSR in accordance with a condition change in or a change request to the playback apparatus.

**[0098]** In detail, when a condition change occurs in the playback apparatus, the transition control unit 30 judges whether a value of the PSR is Valid, Invalid, or undefined. If the value is Valid, the transition control unit 30 maintains the value. If the value is Invalid or undefined, the transition control unit 30 sets an optimal value in the PSR.

**[0099]** When a change of the PSR is requested by user operation information output from the operation reception unit 29 or a button command output from the Interactive Graphics Decoder 13, the transition control unit 30 determines a value (value X) to be set in the PSR according to the user operation information or the button command, and performs a PSR update operation based on value X. If the user operation information indicates that the audio switch key or the subtitle switch key has been pressed, the transition control unit 30 determines a sum of the PSR and 1 as value X. If the user operation information indicates that one of the numeric keys has been pressed, the transition control unit 30 determines a number corresponding to the pressed numeric key as value X. If the button command instructs to set the PSR, on the other hand, the transition control unit 30 determines a value specified by an argument of the button command as value X. Once value X has been determined in this way, the transition control unit 30 judges whether value X is Valid, Invalid, or undefined, and performs a PSR update operation depending on a result of the judgment. In detail, if value X is Valid, the transition control unit 30 overwrites the PSR with value X. If value X is undefined, the transition control unit 30 selects an optimal value and sets the optimal value in the PSR. If value X is Invalid, the transition control unit 30 maintains the value of the PSR.

<PSRs>

**[0100]** This concludes the description of the construction of the playback apparatus according to the present invention. The following describes individual PSRs in the PSR set 28. In the PSR set 28, PSR1, PSR2, PSR15, PSR16, and PSR30 relate to selection of audio and subtitles, capabilities of decoding and presenting audio and subtitles, and a language setting in the playback apparatus. FIG. 13 shows detailed settings of PSR1, PSR2, PSR15, PSR16, and PSR30.

**[0101]** PSR1 specifies an audio stream currently selected by the playback apparatus.

**[0102]** PSR2 includes a disp\_flag field, and specifies a PG\_textST\_stream currently selected by the playback apparatus. The disp\_flag field is set to 0 to indicate that display of a PG stream and a textST stream is disabled, and 1 to indicate that display of a PG stream and a textST

stream is enabled.

**[0103]** PSR15 includes an LPCM capability field, an AC-3 capability field, and a DTS capability field. The LPCM capability field is set to 0001<sub>b</sub> to indicate that the playback apparatus is capable of playing LPCM stereo, and 0010<sub>b</sub> to indicate that the playback apparatus is capable of playing LPCM surround.

**[0104]** The AC-3 capability field is set to 0001<sub>b</sub> to indicate that the playback apparatus is capable of playing AC-3 stereo, and 0010<sub>b</sub> to indicate that the playback apparatus is capable of playing AC-3 surround.

**[0105]** The DTS capability field is set to 0001<sub>b</sub> to indicate that the playback apparatus is capable of playing DTS stereo, 0010<sub>b</sub> to indicate that the playback apparatus is capable of playing DTS surround, and 0000<sub>b</sub> to indicate that the playback apparatus is incapable of decoding a DTS audio stream.

**[0106]** PSR16 is set to a value other than 0xFFFF to indicate an audio stream language attribute, and set to 0xFFFF to indicate that no audio stream language attribute is specified.

**[0107]** A most significant bit of PSR30 is set to 0 to indicate that the playback apparatus is incapable of displaying text subtitles, and set to 1 to indicate that the playback apparatus is capable of displaying text subtitles.

**[0108]** This concludes the explanation of FIG. 13. The following describes PSR4 to PSR8 with reference to FIG. 14. FIG. 14 shows detailed settings of PSR4 to PSR8.

**[0109]** PSR4 is set to one of the values 1 to 100 to indicate a number of a Title corresponding to the current playback time, and set to 0 to indicate that the current playback time corresponds to a top menu.

**[0110]** PSR5 is set to one of the values 1 to 999 to indicate a number of a Chapter corresponding to the current playback time, and set to 0xFFFF to indicate that a Chapter number is invalid in the playback apparatus.

**[0111]** PSR6 is set to one of the values 0 to 999 to indicate a number of a PlayList corresponding to the current playback time (current PlayList).

**[0112]** PSR7 is set to one of the values 0 to 255 to indicate a number of a PlayItem corresponding to the current playback time (current PlayItem).

**[0113]** PSR8 is set to one of the values 0 to 0xFFFFFFFF to indicate the current playback time with a time accuracy of 45 KHz (current PTM). This concludes the explanation of PSR4 to PSR8.

#### <Status transitions of PSR1>

**[0114]** The following describes status transitions of PSR1 in detail.

**[0115]** PSR1 specifies one of a plurality of audio streams which are listed as entries in the STN\_table of the current PlayItem. When PSR1 changes, the playback apparatus plays back an audio stream specified by the changed PSR1. PSR1 is initially set to 0xFF, and can be reset to any of the values 1 to 32 by the playback apparatus. The value 0xFF is an undefined value, indicating

that no audio stream is present or no audio stream is selected. The values 1 to 32 are interpreted as audio stream numbers.

**[0116]** FIG. 15A shows status transitions that can be made by PSR1. In the drawing, the term "Valid" denotes a state where PSR1 is no greater than the number of entries in the STN\_table of the current PlayItem and also the playback apparatus is capable of playing the audio stream.

**[0117]** Meanwhile, the term "Invalid" denotes a state where PSR1 is 0 or greater than the number of entries in the STN\_table of the current PlayItem. There may be a case where even if PSR1 is no greater than the number of entries in the STN\_table of the current PlayItem, the playback apparatus is incapable of decoding the audio stream.

**[0118]** Procedures for setting PSR1 upon a status transition are schematically shown in dotted boxes in FIG. 15A. There are two types of PSR setting procedures, namely, "Procedure when playback condition is changed" and "Procedure when change is requested".

**[0119]** "Procedure when playback condition is changed" is a procedure to run when the condition of the playback apparatus changes due to the occurrence of some kind of event.

**[0120]** "Procedure when YYY change is requested" is a procedure to run when the user requests some kind of change (stream change in the case of FIG. 15).

**[0121]** "Procedure when playback condition is changed" and "Procedure when change is requested" shown in the dotted boxes are the stream selection procedures that constitute the principal features of the present invention, and will be explained in detail later with reference to flowcharts.

**[0122]** Each arrow in FIG. 15A represents a status transition of PSR1.

**[0123]** A comment accompanying each arrow denotes an event which triggers a status transition. In detail, when any of "Load a disc", "Change a Stream", "Start PlayList playback", "Cross a PlayItem boundary", and "Terminate PlayList playback" occurs, PSR1 undergoes a status transition. In view of this notation, it can be understood from FIG. 15A that none of the above procedures is performed upon a status transition from Invalid to Invalid and a status transition from Valid to Invalid. On the other hand, each of a status transition from Invalid to Valid and a status transition from Valid to Valid passes one of the procedures. In other words, to set Valid PSR1, "Procedure when playback condition is changed" or "Procedure when change is requested" is carried out.

**[0124]** The events which trigger status transitions are explained below.

**[0125]** "Load a disc" is an event of loading the BD-ROM to the playback apparatus. Upon loading, PSR1 is initially set to an undefined value (0xFF).

**[0126]** "Start PlayList playback" is an event of starting playback based on a PlayList. When this event occurs, "Procedure when playback condition is changed" is per-

formed, and PSR1 becomes Valid.

**[0127]** "Terminate PlayList playback" is an event of ending playback based on a PlayList. When this event occurs, "Procedure when playback condition is changed" is not performed, and PSR1 becomes Invalid.

**[0128]** "Change XXX" is an event of receiving a user request to switch XXX (stream in the case of FIG. 15). When this event occurs while PSR1 is Invalid (Cj1 in FIG. 15A), PSR1 is set to a value requested by the user. Even if this set value shows a valid audio stream number, PSR1 is treated as Invalid. Thus, a PSR which is Invalid never changes to Valid by "Change XXX".

**[0129]** When "Change a Stream" occurs while PSR1 is Valid (Cj2), on the other hand, "Procedure when change is requested" is performed and a new value is assigned to PSR1. The value assigned to PSR1 here may not be the value requested by the user. This is because "Procedure when change is requested" has a function of excluding an invalid value. PSR1 which is Valid never changes to Invalid by "Change a Stream", since "Procedure when change is requested" ensures not to make PSR1 Invalid.

**[0130]** "Cross a PlayItem boundary" is an event where playback crosses over a PlayItem boundary. The PlayItem boundary refers to here is a point between an end of one PlayItem and a beginning of an immediately succeeding PlayItem. When this event occurs while PSR1 is Valid, "Procedure when playback condition is changed" is performed. After "Procedure when playback condition is changed", PSR1 either returns to Valid or moves to Invalid. Since an STN\_table is provided for each PlayItem, playable elementary streams change when the current PlayItem changes. Accordingly, "Procedure when playback condition is changed" is performed for each PlayItem so as to set PSR1 to a value optimal for the PlayItem.

**[0131]** FIG. 15B is a flowchart of "Procedure when playback condition is changed" for PSR1. This procedure sets PSR1 through a combination of two judgment steps S1 and S2.

**[0132]** First, a judgment is made as to whether the number of entries in the STN\_table is 0 (S1). If the number of entries in the STN\_table is 0, the value of PSR1 is maintained (S3).

**[0133]** When the number of entries in the STN\_table is not 0, a judgment is made as to whether the number of entries in the STN\_table is no smaller than PSR1 and also condition (A) is true (S2). Condition (A) is that the playback apparatus has a capability of playing an audio stream specified by PSR1. If the judgment in step S2 is YES, the value of PSR1 is maintained (S4). If PSR1 is greater than the number of entries in the STN\_table or Condition (A) is false, PSR1 is set to a new value (S5).

**[0134]** FIG. 16 is a flowchart of a detailed procedure of step S5.

**[0135]** Steps S6 and S7 form a loop in which step S8 is performed for each audio stream listed in the STN\_table. In this loop, an audio stream subjected to

processing is called audio stream i. A judgment is made as to whether audio stream i satisfies three conditions (a), (b), and (c) (S8).

**[0136]** Condition (a) is that the playback apparatus has a capability of playing audio stream i. This judgment is made by comparing PSR15 and a stream\_coding\_type of audio stream i shown in the STN\_table.

**[0137]** Condition (b) is that a language attribute of audio stream i is same as the language setting of the playback apparatus. This judgment is made by checking whether an audio\_language\_code of audio stream i shown in the STN\_table matches PSR16.

**[0138]** Condition (c) is that a channel attribute of audio stream i is surround and the playback apparatus has a surround output capability. This judgment is made by comparing PSR15 with an audio\_presentation\_type and the stream\_coding\_type of audio stream i shown in the STN\_table.

**[0139]** The following explains a case where condition (c) is satisfied, with reference to FIG. 17. FIG. 17 shows combinations of capabilities of the playback apparatus and stream attributes in a tabular form. The capabilities of the playback apparatus include stereo output and surround output. The stream attributes include stereo and surround.

**[0140]** When the playback apparatus has a stereo output capability and the attribute of audio stream i is stereo, audio stream i can be played back.

**[0141]** When the playback apparatus has a surround output capability and the attribute of audio stream i is stereo, audio stream i can be played back.

**[0142]** When the playback apparatus has a surround output capability and the attribute of audio stream i is surround, audio stream i can be played back.

**[0143]** When the playback apparatus has a stereo output capability and the attribute of audio stream i is surround, audio stream i can still be played back if the playback apparatus downmixes AC-3 (5.1ch) to AC-3 (2ch). Thus, audio stream i can be played back with any of the four combinations of the capabilities of the playback apparatus and the channel attributes of audio stream i. However, condition (c) is defined to be true only with one of the four conditions, namely, the playback apparatus has a surround output capability and the channel attribute of audio stream i is surround. Thus, a strict condition is given as condition (c).

**[0144]** Though condition (c) is defined to be true only with the above combination, this is merely one example, and condition (c) may be defined to be true also with the combination in which the playback apparatus has a stereo output capability and the channel attribute of audio stream i is stereo. In this case, if the playback apparatus is only capable of stereo output or has been set to prioritize stereo output over surround output, stereo playback of a 2ch audio stream is selected over downmixed playback of a 5.1ch audio stream.

**[0145]** Based on a pattern of conditions audio stream i satisfies, that is, which conditions and how many con-

ditions audio stream i satisfies among the three conditions, a priority is given to audio stream i.

**[0146]** After the loop is performed for each audio stream, steps S9 to S13 are performed. A judgment is made as to whether no audio stream satisfies condition (a) (S9). If there is no audio stream which satisfies condition (a), PSR1 is set to the undefined value (0xFF) (S14).

**[0147]** A judgment is made as to whether there is any audio stream that satisfies all conditions (a), (b), and (c) (S10). If there is such an audio stream, PSR1 is set to a stream number of that audio stream (S15).

**[0148]** Here, if there are two or more audio streams that satisfy conditions (a), (b), and (c), these audio streams are equal in priority. In such a case, one of the audio streams is selected according to the order of entries in the STN\_table (S15). Which is to say, if there are two or more audio streams that have a same combination of codec, language attribute, and channel attribute, one of the audio streams which has a highest entry in the STN\_table is selected as a highest-priority audio stream.

**[0149]** Suppose there are three audio streams that have a same combination of codec, language attribute, and channel attribute and respectively correspond to main program sound, commentary sound, and BGM. In this case, an entry of the audio stream corresponding to the main program sound is placed first in the STN\_table, which is followed by an entry of the audio stream corresponding to the commentary sound and an entry of the audio stream corresponding to the BGM, as shown in FIG. 18. As a result, the main program sound is selected automatically over the commentary sound and the BGM.

**[0150]** Thus, by adjusting the order of audio stream entries in the STN\_table, the author can exercise audio stream selection control, i.e. the author can specify which audio stream is selected for playback.

**[0151]** When there is no audio stream that satisfies all conditions (a), (b), and (c), a judgment is made as to whether there is any audio stream that satisfies conditions (a) and (b) (S11). If there is any audio stream that satisfies conditions (a) and (b), PSR1 is set to a stream number of an audio stream having a highest entry in the STN\_table among the audio streams satisfying conditions (a) and (b) (S16).

**[0152]** When there is no audio stream that satisfies all conditions (a), (b), and (c) and no audio stream that satisfies conditions (a) and (b), a judgment is made as to whether there is any audio stream that satisfies conditions (a) and (c) (S12). If there is any audio stream that satisfies conditions (a) and (c), PSR1 is set to a stream number of an audio stream having a highest entry in the STN\_table among the audio streams satisfying conditions (a) and (c) (S17).

**[0153]** When there is no audio stream that satisfies all conditions (a), (b), and (c), no audio stream that satisfies conditions (a) and (b), and no audio stream that satisfies conditions (a) and (c), a judgment is made as to whether there is any audio stream that satisfies condition (a)

(S13). If there is any audio stream that satisfies condition (a), PSR1 is set to a stream number of an audio stream having a highest entry in the STN\_table among the audio streams satisfying condition (a) (S18).

**[0154]** This completes "Procedure when playback condition is changed". The following describes "Procedure when change is requested". FIG. 19 is a flowchart of "Procedure when change is requested" for PSR1. The difference between this flowchart and the flowchart of FIG. 15B lies in that X is subjected to judgment instead of PSR1. The value X is based on user operation information output from the operation reception unit 29 or a button command output from the Interactive Graphics Decoder 13.

**[0155]** A judgment is made as to whether the number of entries in the STN\_table is no smaller than X and also condition (A) is true (S19). Condition (A) is that the playback apparatus is capable of playing an audio stream specified by X. This judgment is made by comparing PSR15 and a stream\_coding\_type of the audio stream shown in the STN\_table. If the judgment in step S19 is YES, PSR1 is set to X (S21).

**[0156]** If X is greater than the number of entries in the STN\_table or condition (A) is false, a judgment is made as to whether X is 0xFF (S22). If X is not 0xFF, it means the audio stream number requested by the user is invalid, so that the value of PSR1 is maintained with the user-designated value X being ignored (S23).

**[0157]** If PSR1 is 0xFF, PSR1 is set to a new value (S24). A procedure of step 24 is similar to the procedure of step S5 shown in FIG. 16, except for the following. The judgment of step S9 is not needed in "Procedure when change is requested", because "Procedure when change is requested" maintains the value of PSR1 without setting PSR1 to the user-designated value X if there is no audio stream that satisfies any of conditions (a), (b), and (c).

**[0158]** According to the above "Procedure when playback condition is changed" and "Procedure when change is requested", an audio stream that is playable by the playback apparatus and that makes full use of both the features of the BD-ROM and the playback apparatus can be selected.

#### <Specific Examples of PSR1 Setting>

**[0159]** The procedures shown in the above flowcharts are explained using specific examples below.

**[0160]** In one specific example, the playback apparatus is a middle-level playback apparatus. The middle-level playback apparatus referred to here does not have a DTS decoding capability but has an LPCM decoding capability and an AC-3 surround output capability. Also, the language setting of the playback apparatus is Japanese.

**[0161]** Suppose the BD-ROM on which an STN\_table shown in FIG. 20B is recorded is loaded to this playback apparatus. This STN\_table lists entries of six audio streams.

**[0162]** This being the case, for each audio stream, a

judgment is made as to whether conditions (a), (b), and (c) are satisfied in step S8 in FIG. 16. For example, audio stream 1 which is listed first in the STN\_table satisfies only condition (a). Audio stream 2 which is listed second in the STN\_table satisfies conditions (a) and (c).

**[0163]** The judgment on all audio streams reveals that audio stream 5 satisfies all conditions (a), (b), and (c), audio stream 4 satisfies conditions (a) and (b), audio stream 2 satisfies conditions (a) and (c), and audio stream 1 satisfies condition (a). The other audio streams are excluded from selection since they do not satisfy condition (a).

**[0164]** Based on this result, a highest priority is given to audio stream 5 that satisfies all conditions (a), (b), and (c), as shown in FIG. 20C. Hence audio stream 5 is selected and played together with a video stream.

**[0165]** In the above example, the audio stream that satisfies all conditions (a), (b), and (c) is selected. The following considers a case where the playback apparatus does not have a surround output capability. Suppose the playback apparatus does not have a surround output capability, and an AC-3 (2ch) audio stream and an AC-3 (5.1ch) audio stream are multiplexed in an AV Clip on the BD-ROM. According to FIG. 17, both of the audio streams are playable. Therefore, when these audio streams undergo the judgment in the procedure shown in FIG. 16, the audio streams will end up being equal in priority.

**[0166]** In such a case, the STN\_table is referenced to select one of the audio streams. Even if the playback apparatus is incapable of surround output, the playback apparatus can still play back the AC-3 (5.1ch) audio stream by downmixing it to AC-3 (3ch). Such downmixing, however, may result in a lower audio quality at the time of playback than the one intended by the author. On the other hand, the AC-3 (2ch) audio stream is originally intended for stereo output. In view of this, the author may prefer AC-3 (2ch) playback to downmixed AC-3 (5.1ch) playback.

**[0167]** In this case, the author places an entry of the AC-3 (2ch) audio stream above an entry of the AC-3 (5.1ch) audio stream in the STN\_table.

**[0168]** As a result, the playback apparatus without a surround output capability plays not downmixed AC-3 (5.1ch) audio but AC-3 (2ch) audio. With regard to a bit rate, on the other hand, the AC-3 (5.1ch) audio stream has a bit rate of 384 Kbps whereas the AC-3 (2ch) audio stream has a bit rate of 192 Kbps. Thus, the AC-3 (5.1ch) audio stream has a higher bit rate than the AC-3 (2ch) audio stream. The author may consider this more important than the audio quality, and prefer downmixed AC-3 (5.1ch) playback to AC-3 (2ch) playback. In this case, the author places the entry of the AC-3 (5.1ch) audio stream above the entry of the AC-3 (2ch) audio stream in the STN\_table.

**[0169]** As a result, the playback apparatus without a surround output capability plays not AC-3 (2ch) audio but downmixed AC-3 (5.1ch) audio.

**[0170]** The following gives an example of STN\_table description and audio stream selection when the author prefers AC-3 (2ch) playback to downmixed AC-3 (5.1ch) playback, by referring to FIG. 21.

**[0171]** In this example, the playback apparatus does not have a surround output capability, so that PSR15 and PSR16 are set as shown in FIG. 21A. Meanwhile, the STN\_table has the same contents as the one in FIG. 20B, as shown in FIG. 21B. In such a case, audio stream 4 and audio stream 5 that satisfy conditions (a) and (b) have the same priority "1", and audio stream 1 and audio stream 2 that satisfy condition (a) have the same priority "2". Since audio streams 4 and 5 are equal in priority, the playback apparatus selects one of audio streams 4 and 5 based on the order of entries in the STN\_table. Since the author prefers AC-3 (2ch) playback to downmixed AC-3 (5.1ch) playback, the entry of the AC-3 (2ch) audio stream is higher than the entry of the AC-3 (5.1ch) audio stream in the STN\_table shown in FIG. 21B. In other words, audio stream 4 has a higher entry than audio stream 5 in the STN\_table. Therefore, the playback apparatus selects audio stream 4 and plays audio stream 4.

**[0172]** The following explains an example of STN\_table description and audio stream selection when the author prefers downmixed AC-3 (5.1ch) playback to AC-3 (2ch) playback, by referring to FIG. 22.

**[0173]** Since the author prefers downmixed AC-3 (5.1ch) playback, the AC-3 (5.1ch) audio streams (audio streams 2 and 5) respectively have higher entries than the AC-3 (2ch) audio streams (audio streams 1 and 4) in the STN\_table shown in FIG. 22B. Which is to say, audio stream 5 is placed above audio stream 4 in the STN\_table. Accordingly, when audio streams 4 and 5 satisfy the same conditions (a) and (b), the playback apparatus selects audio stream 5 and plays audio stream 5, as shown in FIG. 22C.

**[0174]** Thus, the author can determine which of AC-3 (2ch) playback and downmixed AC-3 (5.1ch) playback is performed when the playback apparatus does not have a surround output capability. This makes it possible to realize playback control that reflects the preference of the author. This concludes the description of the status control regarding PSR1.

#### <Status Transitions of PSR2>

**[0175]** The following describes PSR2. PSR2 is used to specify which of a plurality of PG streams and textST streams listed as entries in the STN\_table of the current PlayItem is to be played. When PSR2 is changed, the playback apparatus plays back a PG stream or a textST stream specified by the changed PSR2. PSR2 is initially set to an undefined value, and can be set to one of the values 1 to 255 by the playback apparatus. The undefined value is 0xFFFF, indicating that no PG stream or textST stream is present or no PG stream or textST stream is selected. The values 1 to 255 are interpreted as PG\_textST\_stream numbers. FIG. 23A shows status

transitions that can be made by PSR2. The status transitions shown in FIG. 23A are same as those shown in FIG. 15A. FIG. 23B is a flowchart of "Procedure when playback condition is changed" for PSR2, and FIG. 24 is a flowchart of "Procedure when change is requested" for PSR2. These flowcharts are respectively similar to those in FIGS. 15B and 19, but substantially differ in a PSR2 setting procedure in steps S5 and S23.

**[0176]** FIG. 25 is a flowchart of the PSR2 setting procedure.

**[0177]** In the drawing, steps S31 and S32 form a loop in which steps S33 to S35 are performed for each PG\_textST\_stream listed in the STN\_table. In this loop, the PG\_textST\_stream subjected to processing is called PG\_textST\_stream i. A judgment is made as to whether a stream\_coding\_type of PG\_textST\_stream i shown in the STN\_table is 0x90 or 0x92 (S33). If the stream\_coding\_type is 0x90, the procedure advances to step S34.

**[0178]** A judgment is made as to whether PG\_textST\_stream i satisfies the following conditions (a) and (b) (S34).

**[0179]** Condition (a) is that the playback apparatus is capable of playing PG stream i.

**[0180]** Condition (b) is that a language attribute of PG stream i matches the language setting of the playback apparatus.

**[0181]** The judgment for condition (b) is made by checking whether a PG\_language\_code of PG stream i shown in the STN\_table matches PSR17.

**[0182]** If the stream\_coding\_type is 0x92, a judgment is made as to whether PG\_textST\_stream i satisfies the following conditions (a) and (b) (S35).

**[0183]** Condition (a) is that the playback apparatus is capable of playing textST stream i.

**[0184]** Condition (b) is that a language attribute of textST stream i matches the language setting of the playback apparatus.

**[0185]** The judgment for condition (a) is made by checking whether PSR30 shows "capable". The judgment for condition (b) is made by checking whether a textST\_language\_code of textST stream i shown in the STN\_table matches PSR17.

**[0186]** After steps S33 to S35 are performed for all PG\_textST\_streams, the procedure advances to steps S36 to S41.

**[0187]** A judgment is made as to whether there is no PG\_textST\_stream that satisfies condition (a) (S36). If there is no PG\_textST\_stream that satisfies condition (a), PSR2 is set to an invalid value (0xFFFF) (S38).

**[0188]** A judgment is made as to whether there is any PG\_textST\_stream that satisfies conditions (a) and (b) (S37). If there is such a PG\_textST\_stream, PSR2 is set to a stream number of a PG\_textST\_stream having a highest entry in the STN\_table among PG\_textST\_streams satisfying conditions (a) and (b) (S39).

**[0189]** If the judgment in step S37 is NO, PSR2 is set

to a stream number of a stream having a highest entry in the STN\_table among PG streams satisfying condition (a) and textST\_streams satisfying condition (a) (S41). The procedure of this flowchart is explained in more detail below, using specific examples.

#### <Specific Examples of PSR2 Setting>

**[0190]** In one specific example, the playback apparatus is capable of decoding a PG stream but incapable of decoding a textST stream, as shown in FIG. 26A. Also, the language setting of the playback apparatus is Japanese.

**[0191]** Suppose the BD-ROM on which an STN\_table shown in FIG. 26B is recorded is loaded to this playback apparatus. The STN\_table has entries of two textST streams (PG\_textST\_streams 1 and 3) and two PG streams (PG\_textST\_streams 2 and 4).

**[0192]** This being the case, steps S34 and S35 are performed to judge, for each PG\_textST\_stream, whether conditions (a) and (b) are satisfied, as shown in FIG. 26C. Here, PG\_textST\_streams 1 and 3 do not satisfy condition (a), PG\_textST\_stream 2 satisfies only condition (a), and PG\_textST\_stream 4 satisfies both conditions (a) and (b).

**[0193]** The judgment on all PG\_textST\_streams in the STN\_table reveals that PG\_textST\_stream 4 satisfies conditions (a) and (b) and PG\_textST\_stream 2 satisfies condition (a). PG\_textST\_streams 1 and 3 do not satisfy condition (a) and so are excluded from selection.

**[0194]** As a result, PG\_textST\_stream 4 is given a highest priority.

**[0195]** If there are two or more PG\_textST\_streams that satisfy same conditions, on the other hand, these PG\_textST\_streams are equal in priority. In such a case, one of the PG\_textST\_streams is selected based on the order of entries in the STN\_table.

**[0196]** A specific example of PG\_textST\_stream selection according to the order of entries in the STN\_table is given below, by referring to FIG. 27. In this specific example, the playback apparatus is capable of decoding both a PG stream and a textST stream. When there are a PG stream and a textST stream that have a language attribute which matches the language setting of the playback apparatus, the PG stream and the textST stream are equal in priority. In this case, the author places an entry of a preferred stream above an entry of the other stream in the STN\_table. If the author prefers the textST stream to the PG stream, the author places an entry of the textST stream above an entry of the PG stream in the STN\_table. As a result, the textST stream is selected automatically over the PG stream.

**[0197]** Thus, by adjusting the order of entries in the STN\_table, the author can exercise selection control of which stream is to be selected at the time of playback.

## &lt;Modifications&gt;

**[0198]** The first embodiment describes the case where if X is invalid in "Procedure when change is requested", the transition control unit 30 maintains the value of PSR1 or PSR2. This process is not desirable, however, in the case where the user presses the audio switch key or the subtitle switch key. When the audio switch key or the subtitle switch key is pressed, X should be PSR + 1. If, despite this, the value of PSR1 or PSR2 is maintained on the ground that X is invalid, the user may think that the playback apparatus malfunctions.

**[0199]** In view of this, when the audio switch key or the subtitle switch key is pressed, the transition control unit 30 performs the following process in addition to "Procedure when change is requested". In this process, when executing "Procedure when change is requested", the value of the PSR before "Procedure when change is requested" is compared with the value of the PSR after "Procedure when change is requested". If the two values are equal, X is incremented by 1, and "Procedure when change is requested" is performed again. X is incremented until the value of the PSR is updated by "Procedure when change is requested".

**[0200]** Once the value of the PSR has been updated by "Procedure when change is requested", the comparison of the two values results in a mismatch. The value of the PSR obtained by "Procedure when change is requested" at this point is used for stream selection.

**[0201]** This process is explained briefly below, using a specific example where PSR1 is set to 3 and stream numbers 4 and 5 are invalid. The transition control unit 30 adds 1 to PSR1, and sets 4 as X. The transition control unit 30 then performs "Procedure when change is requested". Since the stream number 4 is invalid, PSR1 remains 3. When PSR1 is unchanged like this, the transition control unit 30 increments X by 1, to thereby set X to 5. Having done so, the transition control unit 30 performs "Procedure when change is requested" again. Since the stream number 5 is invalid, PSR1 remains 3. When PSR1 is unchanged like this, the transition control unit 30 increments X by 1, to thereby set X to 6. Having done so, the transition control unit 30 performs "Procedure when change is requested" again. Since the stream number 6 is valid, the stream number 6 is automatically selected as a result of "Procedure when change is requested". By performing the above process when the audio switch key is pressed, smooth audio switching can be achieved without making the user notice the existence of an invalid stream number.

Second Embodiment

**[0202]** A second embodiment of the present invention relates to status settings for multi-angle blocks. A data structure for realizing a multi-angle block can be provided in the PlayItem information shown in FIG. 5. FIG. 28 shows a data structure of PlayItem information corre-

sponding to a multi-angle block. In the drawing, the PlayItem information is made up of a basic part that is compatible with PlayItem information corresponding to a non-multi-angle block, and an extension part for realizing the multi-angle block. The basic part has a same data structure as the one shown in FIG. 5, and includes a Clip\_Information\_file\_name field, a Clip\_codec\_identifier field, an IN\_time field, an OUT\_time field, and an STN\_table field. In the multi-angle block, an AV Clip specified by this basic part is treated as a first angle block. In this way, even if a playback apparatus that does not support multi-angle (a playback apparatus that corresponds only to a BD-RE data structure) reads PlayItem information corresponding to a multi-angle block, the playback apparatus can play the first angle block by referencing the basic part. Meanwhile, the extension part is made up of an is\_multi\_angles field, a number\_of\_angles field, and Angle information [2], ..., [j].

**[0203]** The is\_multi\_angles field shows whether a playback section corresponding to the PlayItem information is a multi-angle block or a non-multi-angle block.

**[0204]** The number\_of\_angles field shows, when the is\_multi\_angles field shows a multi-angle block, the number of angles in the multi-angle block.

**[0205]** The Angle information [2], ..., [j] is information for each individual angle block in the multi-angle block, and includes a Clip\_Information\_file\_name field and a Clip\_codec\_identifier field.

**[0206]** The Clip\_Information\_file\_name field shows a filename of an AV Clip that forms the angle block.

**[0207]** The Clip\_codec\_identifier field shows a coding method of the AV Clip specified by the filename shown by the Clip\_Information\_file\_name field in the Angle information.

**[0208]** As shown in the drawing, the Angle information does not have an IN\_time field and an OUT\_time field. This is because a beginning and end of each angle block except the first angle block are specified by the IN\_time field and the OUT\_time field in the basic part. In other words, a playback time of the AV Clip specified by the Clip\_Information\_file\_name field in the Angle information needs to be same as a playback time of the AV Clip specified by the Clip\_Information\_file\_name field in the basic part. Also, time stamps (System Time Clock) which specify presentation timings on the AV Clip playback time axis need to be equal for the two AV Clips.

**[0209]** A specific example of a PlayItem corresponding to a multi-angle block is given below. In this specific example, three PlayItems (PlayItems #1, #2, and #3) are used. Of these PlayItems, PlayItems #1 and #3 constitute multi-angle blocks, whereas PlayItem #2 constitutes a non-multi-angle block. Also, a plurality of AV Clips shown in FIG. 29 (FRONT1, RIGHT1, LEFT1, FRONT2, FRONT3, and RIGHT 2) are recorded on the BD-ROM. Clip\_Information\_file\_names of PlayItem #1 specify FRONT1, LEFT1, and RIGHT1, a Clip\_Information\_file\_name of PlayItem #2 specifies FRONT2, and Clip\_Information\_file\_names of PlayItem #3 specify FRONT3

and RIGHT2. These PlayItems define a main path that is made up of a multi-angle block, a non-multi-angle block, and a multi-angle block in this order. FIGS. 30A and 30B show the multi-angle blocks and non-multi-angle block defined in this way. In the drawing, arrows my1 and my2 indicate designation by two sets of Angle information in PlayItem #1, and arrow my3 indicates designation by one set of Angle information in PlayItem #3. According to the designation my1 and my2 by the two sets of Angle information in PlayItem #1, one of RIGHT1 and LEFT1 can be selected for playback instead of part of the AV Clip. Likewise, according to the designation my3 by the set of Angle information in PlayItem #3, RIGHT2 can be selected for playback instead of part of the AV Clip.

**[0210]** FIG. 30B shows a progress of playback of the multi-angle blocks and non-multi-angle block. As indicated by arrows ag1, ag2, and ag3, one of the three angle blocks can be selected in multi-angle block 1. Also, as indicated by arrows ag4 and ag5, one of the two angle blocks can be selected in multi-angle block 3. This concludes the description of the improvements in the recording medium of the second embodiment.

**[0211]** The following describes improvements in the playback apparatus of the second embodiment. In the playback apparatus, PSR3 specifies an angle block. In the second embodiment, the control unit 24 controls angle block selection and playback according to PSR3.

**[0212]** In detail, the control unit 24 references PSR3, upon playback of the current PlayItem in the current PlayList. If PSR3 = 1, the control unit 24 controls the BD-ROM drive 1 to access an AV Clip specified by a Clip\_Information\_file\_name in the basic part of the current PlayItem and read TS packets of the AV Clip from an IN\_time to an OUT\_time in the current PlayItem. The read TS packets are fed to the Video Decoder 4 to play an angle block.

**[0213]** If PSR3 is 2 or more, the control unit 24 controls the BD-ROM drive 1 to access an AV Clip (aforementioned RIGHT1, LEFT1, or RIGHT2) specified by a Clip\_Information\_file\_name in Angle Information in the extension part of the current PlayItem, and read TS packets of the AV Clip. The read TS packets are fed to the Video Decoder 4 to play an angle block. Thus, by accessing a different AV Clip depending on the value of PSR3, selective playback of angle blocks can be achieved.

**[0214]** PSR3 which specifies an angle block is explained below. FIG. 31 shows settings of PSR3. PSR3 specifies a number of an angle block that is currently selected. PSR3 takes one of the values 1 to 9, to specify one of angle blocks 1 to 9.

**[0215]** Status transitions of PSR3 are explained below. FIG. 32A shows status transitions that can be made by PSR3. When comparing this drawing with FIG. 15A, it can be understood that there is no status transition triggered by "Cross a PlayItem boundary". Also, "Start PlayList playback" and "Terminate PlayList playback" have been replaced respectively with "Start PlayItem with multi

angle structure" and "End of a PlayItem with multi angle structure". Further, "Procedure when change is requested" has been changed from "stream change is requested" to "angle change is requested". Apart from these differences, the status transitions of PSR3 are same as those shown in FIG. 15A.

**[0216]** The number of audio streams differs for each PlayItem. Accordingly, when playback of a PlayList starts and each time the playback crosses a PlayItem boundary, "Procedure when playback condition is changed" needs to be performed to set PSR1. On the other hand, PSR3 is used only in a multi-angle block, and so there is no need to perform "Procedure when playback condition is changed" each time a PlayItem boundary is crossed. Therefore, a status transition from Invalid to Valid is triggered by a start of playback of a multi-angle block, and a status transition from Valid to Invalid is triggered by an end of playback of a multi-angle block.

**[0217]** In this embodiment, the value of PSR3 is maintained upon the status transition from Valid to Invalid. Which is to say, when a multi-angle block and a non-multi-angle block appear alternately (e.g. FIG. 30), only the state of PSR3 is changed from Valid to Invalid and vice versa, without changing the value of PSR3. This concludes the description of the status transitions of PSR3. The following describes "Procedure when playback condition is changed" and "Procedure when change is requested" for PSR3.

**[0218]** FIG. 32B is a flowchart of "Procedure when playback condition is changed" for PSR3. This flowchart has a similar algorithm to the one shown in FIG. 15B. A judgment is made as to whether the number of angles in the current PlayItem is no smaller than PSR3 (S51). If the number of angles in the current PlayItem is no smaller than PSR3, the value of PSR3 is maintained (S53). Otherwise, PSR3 is set to an initial value "1" (S52).

**[0219]** FIG. 32C is a flowchart of "Procedure when change is requested" for PSR3. This flowchart has a similar algorithm to the one shown in FIG. 19. A judgment is made as to whether the number of angles in the current PlayItem is no smaller than X (S54). If the number of angles in the current PlayItem is no smaller than X, PSR3 is set to X (S57). Otherwise, the value of PSR3 is maintained (S55).

**[0220]** Angle block selection performed when playing the multi-angle block, the non-multi-angle block, and the multi-angle block in this order according to the three PlayItems shown in FIG. 30 is explained below, by referring to FIG. 33.

**[0221]** In FIG. 33A, PSR3 is set to 2. This being so, when playback of PlayItem #1 starts, the control unit 24 selects an angle block (RIGHT1) specified by PSR3 = 2 and plays the selected angle block. Once the playback of RIGHT1 ends, PSR3 is changed to Invalid while being held at 2.

**[0222]** Multi-angle block #1 specified by PlayItem #1 is followed by non-multi-angle block #2 specified by PlayItem #2. Since this is a non-multi-angle block, PSR3 re-



mains Invalid. Which is to say, PSR3 is treated as Invalid while being held at 2. Since PSR3 is Invalid, the control unit 24 plays part of the AV Clip (XXX.M2TS) from an IN\_time to an OUT\_time of PlayItem #2, irrespective of the value of PSR3.

[0223] Non-multi-angle block #2 is followed by multi-angle block #3 specified by PlayItem #3. When playback of multi-angle block #3 begins, PSR3 is changed from Invalid to Valid while being held at 2. Since PSR3 becomes Valid, an angle block specified by PSR3 is selected. Here, PSR3 = 2, so that the control unit 24 selects an angle block (RIGHT2) specified by PSR3 = 2 and plays the selected angle block. Arrow gg1 in FIG. 33A indicates a course of angle block selection described above.

[0224] The above concerns the case where PSR3 is set to 2. The following explains the case where PSR3 is set to 3. In FIG. 33B, playback of multi-angle block #1 is performed as in FIG. 33A. After this, PSR3 is changed to Invalid while being held at 3 as a result of the status transition shown in FIG. 32A, and playback of non-multi-angle block #2 is performed in this state. After the playback of non-multi-angle block #2, playback of multi-angle block #3 starts. Since this is the "Start PlayItem with multi angle structure" event, "Procedure when playback condition is changed" is performed. In step S51 in FIG. 32B, a judgment is made as to whether PSR3 exceeds the number of angles in PlayItem #3 is 2, PSR3 = 3 exceeds the number of angles. Accordingly, PSR3 is set to 1 (S52). As a result, the AV Clip XXX.M2TS corresponding to the first angle block in PlayItem #3 is selected and played back, as shown in FIG. 33B. Arrow gg2 in FIG. 33B indicates a course of angle block selection in this case.

[0225] According to the second embodiment, PSR3 makes such status transitions that avoid selecting a non-existent angle block. Accordingly, even when switching from a multi-angle block to a non-multi-angle block and vice versa occur frequently, a wrong number will not be set in PSR3. This ensures the accuracy in angle selection, with it being possible to facilitate distribution of movie films that incorporate multi-angle.

### Third Embodiment

[0226] A third embodiment of the present invention relates to status settings when executing an interactive function. The interactive function referred to here provides a plurality of Pages, places graphics Button members on each Page, and receives a user operation. When executing the interactive function, this embodiment performs status settings about which Page is to be displayed and which Button on that Page is to be focused.

### <Data Structure for the Interactive Function>

[0227] A data structure for displaying a plurality of Pages and Buttons can be provided in the IG stream described in the first embodiment. The IG stream is ex-

plained below, with reference to FIG. 34. The IG stream includes an ICS, a PDS, and an ODS. The ODS is graphics data for displaying a Button graphically. The PDS is pallet data for specifying a color of the Button.

[0228] The ICS is control information for displaying a Page synchronously with a moving picture. The synchronization with the moving picture is designated by a DTS and a PTS in a PES packet carrying the ICS. That is, the DTS in the PES packet carrying the ICS shows a beginning of a period during which the interactive function is valid (a period during which the ICS is Valid).

[0229] Arrow cu1 in FIG. 34 indicates a structure of the ICS in detail. As illustrated, the ICS includes a loading\_model field, a user\_interface\_model field, a composition\_time\_out\_pts field, a selection\_time\_out\_pts field, a user\_time\_out\_duration field, and page information (1), (2), ..., (i), ..., (n) which each correspond to a different one of a plurality of Pages available for presentation.

[0230] The loading\_model field shows whether the IG stream is multiplexed in the AV Clip or is preloaded in the playback apparatus separately from the AV Clip.

[0231] The user\_interface\_model field shows whether a Page is constantly displayed (Always-on) or popped up based on a user operation (Pop-up), during the playback of the moving picture.

[0232] The composition\_time\_out\_pts field shows an end of the period during which the interactive function is valid.

[0233] The user\_time\_out\_duration field shows a period of time after which Page display is to time-out if there is no user operation.

[0234] The page information is explained below. Arrow cu2 in FIG. 34 indicates a structure of the page information in detail. As illustrated, the page information includes a page\_id field, a UO\_mask\_table field, an in\_effects field, an out\_effects field, an animation\_frame\_rate\_code field, a default\_selected\_button\_id\_ref field, a default\_activated\_button\_id\_ref field, a pallet\_id\_ref field, and button\_info (1), (2), ..., (i), ..., (n) each corresponding to a different one of a plurality of Buttons.

[0235] The page\_id field shows an identifier uniquely identifying a Page corresponding to the page information.

[0236] The UO\_mask\_table field shows permissions/prohibitions of user operations in a Display Set (DS) to which the ICS belongs. If this mask field is set to "Prohibited" for a user operation, that user operation to the playback apparatus is invalid.

[0237] The in\_effects field shows a display effect to be presented immediately before the Page is displayed.

[0238] The out\_effects field shows a display effect to be presented immediately after the Page is removed from display.

[0239] The animation\_frame\_rate\_code field shows a frame rate to be applied to an animated Button.

[0240] The default\_selected\_button\_id\_ref field shows whether a Button to be set in a selected state as default when the presentation of the Interactive Display

(Page) begins is determined dynamically or statically. When this field is set to 0xFF the Button to be set in the selected state as default is determined dynamically. In this case, a PSR in the playback apparatus is used preferentially, so that a Button specified by PSR10 is put in the selected state. When this field is not set to 0xFF, on the other hand, the Button to be set in the selected state is determined statically. In this case, PSR10 is set to a button number shown by the default\_selected\_button\_id\_ref, and a Button specified by PSR10 is put in the selected state.

**[0241]** The default\_activated\_button\_id\_ref shows a Button to be automatically set in an activated state if the user does not activate any Button before a time defined by the selection\_time\_out\_pts. When this field is set to FF, the Button currently in the selected state is automatically set in the activated state at the time defined by the selection\_time\_out\_pts. When this field is set to 00, no Button is auto-activated. When this field is set to a value that is neither 00 nor FF, the value is interpreted as a valid button number specifying a Button to be auto-activated.

**[0242]** The pallet\_id\_ref field shows an identifier of a Pallet to be set in a CLUT unit for producing the Interactive Display.

**[0243]** The button\_info field defines a Button to be presented on the Interactive Display. FIG. 35 shows a structure of the button\_info. Guideline hp1 in the drawing shows a structure of button\_info i of Button i controlled by the ICS, in detail. Each individual Button presented on the Page has three states that are a normal state, a selected state, and an activated state. The normal state is a state where the Button is simply displayed. The selected state is a state where the Button is focused according to a user operation but the selection of the Button is not confirmed yet. The activated state is a state where the selection of the Button has been confirmed. Since Button i has these three states, button\_info i has the following fields.

**[0244]** A button\_number field specifies a number uniquely identifying Button i in the ICS.

**[0245]** A numerically\_selectable\_flag field shows a flag indicating whether numeric selection is available for Button i.

**[0246]** An auto\_action\_flag field shows whether Button i is to be automatically set in the activated state. When the auto\_action\_flag field is set to ON (bit value "1"), Button i is changed not to the selected state but directly to the activated state, when Button i becomes selected. If the auto\_action\_flag field is set to OFF (bit value "0"), Button i is changed not directly to the activated state but to the selected state, when Button i becomes selected.

**[0247]** A button\_horizontal\_position field and a button\_vertical\_position field respectively show a horizontal position and a vertical position of a top left pixel of Button i in the Interactive Display.

**[0248]** An upper\_button\_number field shows a button number of a Button to receive the selected state when a

user operation of pressing the Move Up key is made while Button i is in the selected state. If this field shows the button number of Button i, then a user operation of pressing the Move Up key is ignored.

**[0249]** A lower\_button\_number field, a left\_button\_number field, and a right\_button\_number field respectively show button numbers of Buttons to receive the selected state when user operations of pressing the Move Down key, the Move Left key, and the Move Right key are performed while Button i is in the selected state. If any of these fields shows the button number of Button i, then a corresponding user operation is ignored.

**[0250]** A start\_object\_id\_normal field specifies a beginning one of object\_ids that are serially assigned to a sequence of ODSs used to present the normal state of Button i in animation.

**[0251]** An end\_object\_id\_normal field specifies a last one of the object\_ids that are serially assigned to the sequence of ODSs used to present the normal state of Button i in animation. If the end\_object\_id\_normal field specifies the same ID as the start\_object\_id\_normal field, a static image of a graphics Object identified by this ID is presented as Button i.

**[0252]** A repeat\_normal\_flag field specifies whether the animation of Button i in the normal state is to be continuously repeated.

**[0253]** A start\_object\_id\_selected field specifies a beginning one of object\_ids that are serially assigned to a sequence of ODSs used to present the selected state of Button i in animation.

**[0254]** An end\_object\_id\_selected field specifies a last one of the object\_ids that are serially assigned to the sequence of ODSs used to present the selected state of Button i in animation. If the end\_object\_id\_selected field specifies the same ID as the start\_object\_id\_selected field, a static image of a graphics Object identified by this ID is presented as Button i.

**[0255]** A repeat\_selected\_flag field specifies whether the animation of Button i in the selected state is to be continuously repeated. If the start\_object\_id\_selected field and the end\_object\_id\_selected field have a same value, the repeat\_selected\_flag field is set to 00.

**[0256]** A start\_object\_id\_activated field specifies a beginning one of object\_ids that are serially assigned to a sequence of ODSs used to present the activated state of Button i in animation.

**[0257]** An end\_object\_id\_activated field specifies a last one of the object\_ids that are serially assigned to the sequence of ODSs used to present the activate state of Button i in animation.

**[0258]** The following describes button commands.

**[0259]** A button command (button\_command) is a command that is executed when Button i is activated. The following commands (i) to (iv) are used as button commands, to write a value to a PSR or a GPR or read a value from a PSR or a GPR.

(i) Get value of Player Status Register command

(written as "Get value of Player Status Register (augment)")

This function acquires a value from a PSR specified by the augment.

(ii) Set value of Player Status Register command (written as "Set value of Player Status Register (augment 1, augment 2)")

This function sets a value specified by augment 2, to a PSR specified by augment 1.

(iii) Get value of General Purpose Register command (written as "Get value of General Purpose Register (augment) ")

This function acquires a value from a GPR specified by the augment.

(iv) Set value of General Purpose Register command (written as "Set value of General Purpose Register (augment 1, augment 2)")

This function sets a value specified by augment 2, to a GPR specified by augment 1.

#### <Specific Example>

**[0260]** This concludes the description of the structure of the ICS. A specific example of interactive control by the ICS is given below. This specific example uses an ICS and ODSs shown in FIG. 36. FIG. 36 shows a relationship between the ICS and the ODSs included in DS<sub>n</sub>. The ODSs are made up of ODS11 to ODS19, ODS21 to ODS29, ODS31 to ODS39, and ODS41 to ODS49. ODS11 to ODS19 represent each state of Button 1-A, ODS21 to ODS29 represent each state of Button 1-B, ODS31 to ODS39 represent each state of Button 1-C, and ODS41 to ODS49 represent each state of Button 1-D, as indicated by the parenthesis "}" in the drawing. The ICS contains page information (1), (2), and (3) corresponding to three Pages 1 to 3. Status control of Buttons 1-A to 1-D is defined in button\_info (1), (2), (3), and (4) in page information (1) of Page 1 (as indicated by arrows bh1, bh2, bh3, and bh4 in the drawing).

**[0261]** When timing of the control by the ICS matches presentation timing of picture data pt1 of a moving picture shown in FIG. 37, Page 1 out of the three Pages (Pages 1 to 3) available for presentation by the ICS is overlaid on picture data pt1 and displayed (gs2). Thus, an Interactive Display provided with a plurality of Buttons is presented in correspondence with the contents of the moving picture. In this way, realistic presentation using Buttons can be achieved through the use of an ICS.

**[0262]** FIG. 39 shows an example of ICS description for defining status transitions of Buttons 1-A to 1-D shown in FIG. 38. Arrows hh1 and hh2 in FIG. 38 represent status transitions defined by neighbor\_info() in button\_info (1), which is associated with Button 1-A. The lower button number field in the neighbor\_info() in button\_info (1) is set to specify Button 1-C. Accordingly, when a user operation of pressing the Move Down key is made while Button 1-A is in the selected state (up1 in FIG. 38), Button 1-C receives the selected state (sj1 in

FIG. 38). The right\_button\_number field in the neighbor\_info() in button\_info (1) is set to specify Button 1-B. Accordingly, when a user operation of pressing the Move Right key is made while Button 1-A is in the selected state (up2 in FIG. 38), Button 1-B receives the selected state (sj2 in FIG. 38).

**[0263]** Arrow hh3 in FIG. 38 indicates control of a status transition defined by neighbor\_info() in button\_info(3). The upper\_button\_number field in the neighbor\_info() in button\_info(3), which is associated with Button 1-C, is set to specify Button 1-A. Accordingly, when a user operation of pressing the Move Up key is made while Button 1-C is in the selected state (up3 in FIG. 38), Button 1-A is put back to the selected state (sj3 in FIG. 38). Button 1-A corresponds to a button command "Set Page 2". This command instructs the playback apparatus to switch to Page 2. Upon activation of Button 1-A, this command is executed, as a result of which Page 1 is switched to Page 2 as shown in FIG. 40.

#### <Playback Apparatus>

**[0264]** This concludes the description of the improvements in the recording medium of the third embodiment. The following describes the playback apparatus of the third embodiment. Of the plurality of PSRs in the playback apparatus, PSR0, PSR11, and PSR10 relate to the interactive function. PSR0, PSR10, and PSR11 are explained below, with reference to FIG. 41.

**[0265]** PSR0 specifies one of a plurality of IG streams which are listed as entries in the STN\_table of the current PlayItem.

**[0266]** PSR11 specifies, when the IG stream specified by PSR0 contains a plurality of Pages available for presentation, one of the plurality of Pages.

**[0267]** PSR10 specifies, when the Page specified by PSR11 has a plurality of Buttons, one of the plurality of Buttons.

**[0268]** To realize the interactive function, PSR0 makes the following status transitions. PSR0 is initially set at 1, and can be set to any of the values 2 to 32 by the playback apparatus. FIG. 42A shows status transitions that can be made by PSR0. FIG. 42B is a flowchart of "Procedure when playback condition is changed" for PSR0. FIG. 43 is a flowchart of "Procedure when change is requested" for PSR0. These status transitions and flowcharts are same as those of PSR1 and PSR2 described in the first embodiment. As in the case of audio streams and PG\_textST\_streams, when IG streams corresponding to multiple languages are multiplexed in the AV Clip, one of the IG streams that matches the language setting of the playback apparatus is selected and played back. Here, the playback apparatus selects the IG stream depending on the order of entries in the STN\_table. Therefore, by adjusting the order of entries in the STN\_table, the author can control which IG stream is to be selected. This concludes the description of the status transitions of PSR0.

[0269] PSR10 and PSR11 make status transitions similar to those described in the first and second embodiments, too. This will be described in detail later.

[0270] The following describes a construction of the playback apparatus of the third embodiment. PSR0 specifies the IG stream to be played. This being so, the control unit 24 and the Demultiplexer 3 perform the following processing.

[0271] The control unit 24 extracts a PID from one of the entry-attribute combinations of IG streams in the STN\_table that is specified by PSR0, and sets the PID in the Demultiplexer 3.

[0272] The Demultiplexer 3 outputs, from among TS packets read from the BD-ROM and the HD, TS packets having the PID set by the control unit 24, to the Interactive Graphics Decoder 13. Hence an ICS, a PDS, and an ODS are fed to the Interactive Graphics Decoder 13.

<Internal Construction of the Interactive Graphics Decoder 13>

[0273] An internal construction of the Interactive Graphics Decoder 13 is described below, with reference to FIG. 44. As shown in the drawing, the Interactive Graphics Decoder 13 includes a Coded Data Buffer 33, a Stream Graphics Processor 34, an Object Buffer 35, a Composition Buffer 36, and a Graphics Controller 37.

[0274] The Coded Data Buffer 33 is a buffer for temporarily storing an ICS, a PDS, and an ODS together with DTSS and PTSs.

[0275] The Stream Graphics Processor 34 decodes the ODS to obtain uncompressed graphics, and writes the uncompressed graphics to the Object Buffer 35.

[0276] The Object Buffer 35 is a buffer for storing a plurality of sets of uncompressed graphics (represented by the rectangles in the drawing) generated by the Stream Graphics Processor 34.

[0277] The Composition Buffer 36 is a memory for storing an ICS. The Composition Buffer 36 outputs a plurality of sets of page information in the ICS and a plurality of button\_info structures in each set of page information, to the Graphics Controller 37.

[0278] The Graphics Controller 37 refers to each button\_info structure in page information specified by PSR11 (current page information) out of the plurality of sets of page information in the ICS stored in the Composition Buffer 36, and renders graphics. In detail, the Graphics Controller 37 reads graphics specified by a start\_object\_id\_normal field value and an end\_object\_id\_normal field value of normal\_state\_info of each button\_info structure in the current page information from the Object Buffer 35, and writes the read graphics to the Interactive Graphics Plane 15. Regarding a button\_info structure specified by PSR10, the Graphics Controller 37 reads graphics specified by a start\_object\_id\_selected field value and an end\_object\_id\_selected field value of selected\_state\_info of the button\_info structure from the Object Buffer 35, and writes the read graphics to the In-

teractive Graphics Plane 15. Arrows bg1, bg2, bg3, and bg4 in FIG. 44 represent the rendering of the graphics by the Graphics Controller 37. As a result of the rendering, a Page including Buttons 1-A to 1-D is stored on the Interactive Graphics Plane 15 and overlaid on a moving picture.

[0279] This concludes the rough description of the procedure to be performed by the Graphics Controller 37. FIGS. 45 to 51 show the procedure to be performed by the Graphics Controller 37 in greater detail.

[0280] FIG. 45 is a flowchart of a main routine of the procedure performed by the Graphics Controller 37. In this flowchart, while conducting step S88 (an animation procedure) and step S89 (an UO procedure), judgments are made in steps S81, S82, and S83 as to whether specific events have occurred. If any of the events has occurred, corresponding steps are performed and the procedure returns to the main routine.

[0281] A judgment is made as to whether the current playback time has reached a point when the ICS becomes valid (S81). If the judgment in step S81 is YES, PSR10 is set to specify first page information in the ICS (S84). After this, a current page display procedure is carried out (S85).

[0282] A judgment is made as to whether the current playback time has reached a point shown by the selection\_time\_out\_pts (S82). If the judgment in step S82 is YES, a button activation procedure is carried out (S86).

[0283] A judgment is made as to whether the current playback time has reached a point shown by the composition\_time\_out\_pts (S83). If the judgment in step S83 is YES, the Interactive Graphics Plane 15 is cleared and PSR10 and PSR11 are changed to Invalid (S87). This completes the synchronization procedure using time stamps. In this synchronization procedure, steps S85 and S86 are performed by calling subroutines. A procedure of the subroutine of step S85 is described below, with reference to FIG. 46.

[0284] FIG. 46 is a flowchart of an initial display procedure. A display effect specified by the in\_effects field of the current page information is executed (S91). After this, a current button setting procedure is performed (S92). The current Button is specified by PSR10. Accordingly, "Procedure when playback condition is changed" for PSR10 is performed to determine the current Button. Once the current Button has been determined as a result of step S92, the procedure advances to steps S93 to S98.

[0285] Steps S93 to S98 form a loop that is performed for each button\_info structure in the current Page (S93 and S94). Button-info to be processed in this loop is called button\_info (p).

[0286] A judgment is made as to whether button\_info (p) corresponds to the current Button (S95). If the judgment in step S95 is YES, the procedure advances to step S96. If the judgment in step S95 is NO, the procedure advances to step S97.

[0287] In step S96, a graphics Object specified by a

start\_object\_id\_selected field value of selected\_state\_info in button\_info (p) is designated as graphics Object (p) in the Object Buffer 35.

**[0288]** In step S97, a graphics Object specified by a start\_object\_id\_normal field value of normal\_state\_info in button\_info(p) is designated as graphics Object(p) in the Object Buffer 35.

**[0289]** Once graphics Object (p) has been designated as a result of step S96 or S97, graphics Object(p) is written onto the Interactive Graphics Plane 15 at a position specified by a button\_horizontal\_position field value and a button\_vertical\_position field value in button\_info(p) (S98). As a result of performing this operation for each button\_info structure in the current Page, among a plurality of graphics Objects associated with each button state, an initial graphics Object is rendered for each Button to the Interactive Graphics Plane 15.

**[0290]** A procedure of the subroutine of step S86 is explained next, with reference to FIG. 47.

**[0291]** FIG. 47 is a flowchart of a button auto-activation procedure. A judgment is made as to whether a default\_activated\_button\_id\_ref is 00 or FF (S100). If the default\_activated\_button\_id\_ref is 00, the procedure returns to the main routine without performing any step. If the default\_activated\_button\_id\_ref is FF, current Button i is activated (S102). Following this, variable animation (i) corresponding to current Button i is set to 0. The procedure then returns to the main routine (S103).

**[0292]** If the default\_activated\_button\_id\_ref is neither 00 nor FF, a Button specified by the default\_activated\_button\_id\_ref is set as current Button i (S101), and current Button i is activated (S102). Following this, animation (i) corresponding to current Button i is set to 0. The procedure then returns to the main routine (S103).

**[0293]** As a result of the above procedure, a Button in the selected state is activated after a predetermined time period. This concludes the description of the flowchart of FIG. 47.

**[0294]** The following describes a procedure of animation display on a Page. FIG. 48 is a flowchart of the animation display procedure.

**[0295]** The initial display is presented by writing the graphics Object specified by the start\_object\_id\_normal in the normal\_state\_info or the start\_object\_id\_selected in the selected\_state\_info in each button\_info structure, onto the Interactive Graphics Plane 15. Animation means an operation of updating each Button image by overwriting the Interactive Graphics plane 15 with an arbitrary one of a sequence of graphics Objects (qth graphics Object) associated with the Button, in each repetition of the main routine. That is to say, each Button is presented in animation by rendering a sequence of graphics Objects associated with the normal\_state\_info or selected\_state\_info provided within each button\_info structure, one by one to the Interactive Graphics Plane 15. Here, variable q is used to specify an individual graphics Object associated with the normal\_state\_info or selected\_state\_info provided within each button\_info structure.

**[0296]** The animation display procedure is described below, by referring to FIG. 48. For simplicity's sake, this flowchart is based on a premise that the repeat\_normal\_flag and the repeat\_selected\_flag in each button\_info structure in the ICS are set to indicate that the continuous repetition is required.

**[0297]** A judgment is made as to whether the initial display has been performed (S110). If the initial display is not yet performed, the procedure returns to the main routine without performing any step. If the initial display has been performed, the procedure advances to steps S111 to S123. Steps S111 to S123 form a loop in which steps S113 to S123 are performed for each button\_info structure (button\_info(p)) of the current page information in the ICS (S111 and S112).

**[0298]** Variable q is set to the value of animation(p) corresponding to button\_info(p) (S113). As a result, variable q represents the current frame number for button\_info (p).

**[0299]** A judgment is made as to whether button\_info (p) corresponds to the current Button, i.e. the Button which is currently in the selected state (S114).

**[0300]** If the judgment in step S114 is NO, a value obtained by adding variable q to the start\_object\_id\_normal of the normal\_state\_info in button\_info (p) is set as ID (q) (S115).

**[0301]** If the judgment in step S114 is YES, the procedure advances to step S116.

**[0302]** In step S116, a judgment is made as to whether the current Button is in the activated state. If the current button is in the activated state, a value obtained by adding variable q to the start\_object\_id\_activated of the actioned\_state\_info in button\_info (p) is set as ID(q) (S117). After this, one of button commands in button\_info (p) is executed (S118).

**[0303]** If the current Button is not in the activated state, a value obtained by adding variable q to the start\_object\_id\_selected of the selected\_state\_info in button\_info(p) is set as ID(q) (S119).

**[0304]** Once ID(q) has been determined in this way, graphics Object (q) identified by ID (q) is read from the Object Buffer 35 and written to the Interactive Graphics Plane 15 at a position shown by the button\_horizontal\_position and the button\_vertical\_position in button\_info (p) (S120).

**[0305]** As a result, the qth graphics Object in the sequence of graphics Objects representing the selected state (or the activated state) of the current Button or the normal state of any of the other Buttons in animation is obtained on the Interactive Graphics Plane 15.

**[0306]** A judgment is made as to whether the sum of the start\_object\_id\_normal and variable q has reached the end\_object\_id\_normal in button\_info(p) (S121). If the judgment in step S121 is NO, variable q is incremented by 1 and assigned to animation(p) (S122). If the judgment in step S121 is YES, animation(p) is initialized to 0 (S123). The above operation is repeated for each button\_info structure of the current page information in

the ICS (S111 and S112) . Once the operation has been completed for all button\_info structures, the procedure returns to the main routine.

**[0307]** As a result of steps S110 to S123, each Button image on the Interactive Display is updated using a new graphics Object each time the main routine is performed. Repeating the main routine over and over again enables the Button images to be presented in animation. When presenting the Buttons in animation, the Graphics Controller 37 adjusts the duration for presenting each graphics Object so as to maintain the animation\_frame\_rate\_code.

**[0308]** A button command execution procedure is explained below, with reference to a flowchart of FIG. 49. One button\_command is extracted from in the button\_info (S131). A judgment is made as to whether the button\_command is a Page switching command (S132). If the button\_command is not a Page switching command, the button\_command is executed (S133). If the button\_command is a Page switching command, a display effect specified by the out\_effects in the current Page is executed (S134). Following this, a switching destination page number specified by an operand of the button\_command is set as X, and a button number specified by an operand of the button\_command is set in PSR10 (S135) . After this, "Procedure when change is requested" for PSR11 is performed (S136). PSR11 specifies the current Page. By performing "Procedure when change is requested" for such PSR11, the current Page is determined. After this, "Procedure when playback condition is changed" is performed for PSR10. This completes the button command execution procedure.

**[0309]** This concludes the description of the button command execution procedure. The following describes an UO procedure in step S89 of the main routine, with reference to FIG. 50.

**[0310]** FIG. 50 is a flowchart of the UO procedure. In this flowchart, steps S140 to S143 are performed to judge whether specific events have occurred. If any of the events has occurred, corresponding steps are performed and then the procedure returns to the main routine. A judgment is made as to whether the UO\_mask\_table in the current Page is set to 1 (S140). If the judgment in step S140 is YES, the procedure returns to the main routine without performing any step.

**[0311]** A judgment is made as to whether any of the Move Up key, the Move Down key, the Move Left key, and the Move Right key has been pressed (S141). If the judgment in step S141 is YES, a current Button change procedure is performed (S147), and a judgment is made as to whether the auto\_action\_flag of the current Button is 01 (S148). If the judgment in step S148 is NO, the procedure returns to the main routine. If the judgment in step S148 is YES, the procedure advances to step S144.

**[0312]** A judgment is made as to whether a numeric input has been made (S143) . If the numeric input has been made, a numeric input operation is performed (S146). After this, the procedure returns to the main rou-

tine.

**[0313]** A judgment is made as to whether the Activated key has been pressed (S142). If the judgment in step S142 is YES, current Button i is activated (S144). After this, animation(i) is set to 0 (S145). In the procedure shown in FIG. 50, step S147 is performed by calling a subroutine. FIG. 51 shows a procedure of this subroutine.

**[0314]** FIG. 51 is a flowchart of a current button change procedure. First, from the upper\_button\_number, the lower\_button\_number, the left\_button\_number, and the right\_button\_number in the neighbor\_info associated with the current Button, a button number that corresponds to the pressed key is specified (S150).

**[0315]** The current Button is set as button Y, and a new Button identified by the specified button number is set as Button X (S151). To set PSR10 to X, "Procedure when change is requested" is performed (S152).

**[0316]** After the setting, animation (X) and animation (Y) are set to 0. The procedure then returns to the main routine (S153).

**[0317]** This concludes the description of the procedures performed by the Interactive Graphics Decoder 13.

#### <Specific Examples of Focus Shift>

**[0318]** In the above Page switching, the author decides which Button in the switch destination Page is to be set in the selected state. This raises an issue of how to perform a focus shift. A focus referred to here indicates a Button which is in the selected state. A focus shift is to dynamically or statically change the Button in the selected state in accordance with Page switching, using the aforementioned button command or default selected button.

**[0319]** The following describes a focus shift for aiding the viewing of a package medium on which a plurality of sets of content such as a drama series are recorded. In the package medium recording the drama series, content corresponding to each of the episodes such as the first to fourth episodes is contained in one disc. In this case, playback is generally performed in the order of episodes, i.e. the first episode → the second episode → the third episode → the fourth episode. This being so, it is troublesome for the user to perform, on a selection menu, an operation of selecting the next episode each time playback of one episode ends.

**[0320]** FIG. 52 shows a specific example of this selection operation. In the drawing, the selection menu has Buttons corresponding to the first to fourth episodes. When the selection of one Button is confirmed, a chapter menu for an episode corresponding to that Button is displayed. After the display of the chapter menu, the selection menu is displayed again. On this selection menu, the user needs to perform a key operation to select the next episode. In detail, when a chapter menu of the first episode is displayed (hw1) and then the selection menu is displayed again (hw2), the user needs to perform a key operation (ks1) to select the second episode.

**[0321]** Also, when a chapter menu of the second episode is displayed (hw3) and then the selection menu is displayed again (hw4), the user needs to perform a key operation (ks2) to select the third episode.

**[0322]** A focus shift alleviates such a trouble of having to perform key operations. The following describes a procedure of performing a focus shift. FIG. 53 shows how Pages 1 to shown in FIG. 52 are assigned to the selection menu and the chapter menus. Here, Page 1 is assigned to the selection menu, Page 2 is assigned to the chapter menu of the first episode, Page 3 is assigned to the chapter menu of the second episode, and Page 4 is assigned to the chapter menu of the third episode.

**[0323]** Also, Buttons 1-A to 1-D on Page 1 are assigned respectively to selection Buttons for the first to fourth episodes in the selection menu, and Buttons 2-A to 2-F on Page 2 are assigned respectively to selection Buttons for chapters 1 to 5 and a return Button in the chapter menu of the first episode. The return Button referred to here is a Button for accepting a user operation of displaying the selection menu again.

**[0324]** This being the case, button commands of Button 1-A on Page 1 and button commands of Button 2-F on Page 2 define procedures such as those shown in FIG. 54. Procedures defined by the button commands of Button 1-A are the following. When the selection of Button 1-A is confirmed, (1) the value of PSR10 is saved to a GPR, (2) PSR11 is set to 2, and (3) PSR10 is set to 1.

**[0325]** By setting the PSRs in this way, the chapter menu of the first episode is displayed with Button 2-A being in the selected state.

**[0326]** Meanwhile, procedures defined by the button commands of Button 2-F are the following. When the selection of Button 2-F is confirmed, (1) PSR11 is set to 1, and (2) PSR10 is set to a sum of 1 and the value saved to the GPR.

**[0327]** According to these procedures defined by the button commands of Button 1-A on Page 1 and Button 2-F on Page 2, when the display of the chapter menu of the first episode ends and the selection menu is displayed again, the focus is automatically shifted from the Button for the first episode to the Button for the second episode on the selection menu. By defining button commands of Buttons 1-B to 1-D on Page 1 and the Buttons of the other Pages in a similar way, focus shifts such as those shown in FIG. 55 can be realized.

**[0328]** With the aid of such focus shifts, the user can easily search the drama series made up of a number of sets of content, for a chapter which he or she wants to view.

**[0329]** To realize the above focus shifts, it is necessary to define button commands for each individual Button. This being so, if there are many Pages and Buttons, a bug may occur. This raises the need for conducting a test to find bugs.

**[0330]** Bugs likely to occur in focus shifts are as follows. When displaying Page 1, if the above procedures are performed while Button 1-D is in the selected state, a

button number (= 5) obtained by adding 1 to a button number of Button 1-D is written to PSR10 upon switching from Page 1, Page 2, and back to Page 1. Since Page 1 does not have a fifth Button, the focus will end up being shifted to a nonexistent Button on Page 1. Also, there may be a case where after the sixth Button (Button 1-F) on Page 2 is set in the selected state, Page 1 is displayed again without updating PSR10, as shown in FIG. 56. In this case too, the focus will end up being shifted to a nonexistent Button on Page 1. Thus, when the number of Buttons on each Page is different, a bug of putting a nonexistent Button on a switch destination Page into the selected state can occur frequently. Such defects need be corrected upon shipment of content. Accordingly, the author must perform a debug test to ensure normal operations, as in the case of shipment of programs. However, the imperative for the author to perform such a debug test as being conducted by a software house may adversely affect the content production that is the core business of the author.

**[0331]** In view of this, the third embodiment of the present invention applies status transitions through "Procedure when playback condition is changed" and "Procedure when change is requested", to PSR10 and PSR11 in the same way as PSR1, PSR2, and PSR3.

<Status transitions of PSR11>

**[0332]** PSR11 specifies a Page which is currently displayed among a plurality of Pages included in the IG stream (current Page). PSR11 takes one of the values 00 to FF, and the playback apparatus displays the Page specified by PSR11. FIG. 57A shows status transitions that can be made by PSR11. When comparing this drawing with FIG. 15A, it can be seen that there is no status transition triggered by the "Cross a PlayItem boundary" event. Also, an event that triggers a status transition from Invalid to Valid has been changed from "Start PlayList playback" to "Interactive Composition Segment becomes Valid", and an event that triggers a status transition from Valid to Invalid has been changed from "Terminate PlayList playback" to "Interactive Composition Segment becomes Invalid". Also, "Procedure when change is requested" has been changed from "stream change is requested" to "page change is requested. Apart from these differences, FIG. 57A is same as FIG. 15A.

**[0333]** "Interactive Composition Segment becomes Invalid" includes an event that the current playback time has reached a point specified by the composition\_time\_out\_pts in an ICS, an event that an ICS has changed, and an event that PlayList playback ends. The number of audio streams differs for each PlayItem. Accordingly, when PlayList playback starts and each time a PlayItem boundary is crossed, "Procedure when playback condition is changed" needs to be performed to set PSR1. However, PSR11 is used only in a playback section where an ICS is multiplexed, and so there is no need to perform "Procedure when playback condition is

changed" each time a PlayItem boundary is crossed. Therefore, a status transition from Invalid to Valid of PSR11 is triggered by an event that an ICS becomes Valid.

**[0334]** "Procedure when playback condition is changed" for PSR11 is explained below. FIG. 57B is a flowchart of "Procedure when playback condition is changed" for PSR11. In "Procedure when playback condition is changed", first page information in the ICS is set in PSR11 (S154).

**[0335]** FIG. 57C is a flowchart of "Procedure when change is requested" for PSR11. A judgment is made as to whether X is Valid (S155). If X is Valid, X is assigned to PSR11 (S156). If X is Invalid, the value of PSR11 is maintained (S157). This concludes the description of PSR11.

<Status Transitions of PSR10>

**[0336]** The following describes status transitions of PSR10. FIG. 58A shows status transitions that can be made by PSR10. This drawing is same as FIG. 57A, except that a status transition triggered by an event "Change Page" or "Button Disabled" has been added. Also, "Procedure when change is requested" has been changed from "page change is requested" to "button change is requested".

**[0337]** "Change Page" is an event that Page switching is requested. "Button Disabled" is an event that a Button displayed on a Page is disabled. Upon the occurrence of such an event, "Procedure when playback condition is changed" is performed to set PSR10, and then PSR10 returns to Valid.

**[0338]** "Procedure when playback condition is changed" and "Procedure when change is requested" for PSR10 are described below.

**[0339]** FIG. 58B is a flowchart of "Procedure when playback condition is changed" for PSR10.

**[0340]** A judgment is made as to whether the default\_selected\_button\_id\_ref in the current Page is Valid (S161). If the judgment in step S161 is YES, PSR10 is set to the default\_selected\_button\_id\_ref (S162).

**[0341]** If the judgment in step S161 is NO, a judgment is made as to whether PSR10 is Valid (S163). If PSR10 is Valid, the value of PSR10 is maintained (S164). If PSR10 is Invalid, PSR10 is set to a button number of the first button\_info structure in the current Page (S165).

**[0342]** FIG. 59 is a flowchart of "Procedure when change is requested" for PSR10. First, a judgment is made as to whether X is Valid (S166). If X is Valid, PSR10 is set to X (S168). If X is Invalid, the value of PSR10 is maintained (S167).

**[0343]** According to the above procedures, when PSR10 is Invalid, PSR10 is set so that the Button specified by the first button\_info structure of the current Page is set in the selected state. Accordingly, even if the author designates a button number of a Button which does not exist in a switch destination Page, a process of changing

the wrong button number to a correct button number is automatically performed. Thus, even if a button command for realizing a focus shift has a defect, such a defect can be automatically corrected. This reduces the burden on the author.

#### Modifications

**[0344]** Though the present invention has been described by way of the above embodiments, the present invention is not limited to such. The present invention can be realized with any of modifications (A) to (M) given below. The invention of each of the claims of this application includes extension and generalization of the above embodiments and their modifications below. The degree of extension and generalization depends upon the state of the art in the technical field of the present invention at the time of filing of this application.

(A) The above embodiments describe the case where the BD-ROM is used as the recording medium according to the present invention. Main features of the present invention, however, lie in a graphics stream recorded on the recording medium, which does not rely on physical characteristics of BD-ROMs. Therefore, the present invention is applicable to any recording medium that is capable of recording a graphics stream. Examples of such a recording medium include: an optical disc such as a DVD-ROM, a DVD-RAM, a DVD-RW, a DVD-R, a DVD+RW, a DVD+R, a CD-R, or a CD-RW; a magneto-optical disk such as a PD or an MO; a semiconductor memory card such as a CompactFlash card, a SmartMedia card, a Memory Stick card, a MultiMediaCard, or a PCMCIA card; a magnetic disk such as a flexible disk, SuperDisk, Zip, or Click!; a removable hard disk drive such as ORB, Jaz, SparQ, SyJet, EZFley, or Microdrive, and a nonremovable hard disk drive.

(B) The above embodiments describe the case where the playback apparatus decodes an AV Clip on the BD-ROM and outputs the decoded AV Clip to the television. As an alternative, the playback apparatus may be equipped with only a BD-ROM drive, with the remaining construction elements being provided in the television. In this case, the playback apparatus and the television can be incorporated in a home network connected with an IEEE 1394 connector. The above embodiments describe the case where the playback apparatus is connected to the television, but the playback apparatus may instead be integrated with a display device. Also, the playback apparatus may include only the system LSI (integrated circuit) which constitutes an essential part of processing. The playback apparatus and the integrated circuit are both an invention described in this specification. Accordingly, regardless of whether the playback apparatus or the integrated circuit is



concerned, an act of manufacturing a playback apparatus based on the internal construction of the playback apparatus described in the first embodiment is an act of working of the present invention. Also, any act of assigning with charge (i.e. for sale) or without charge (i.e. as a gift), leasing, and importing the playback apparatus is an act of working of the present invention. Likewise, an act of offering for assignment or lease of the playback apparatus using storefront displays, catalogs, or brochures is an act of working of the present invention.

(C) Information processing using the programs shown in the flowcharts is actually realized using hardware resources. Accordingly, the programs which describe the operational procedures shown in the flowcharts are themselves an invention. The above embodiments describe the case where the programs are incorporated in the playback apparatus, but the programs can be used independently of the playback apparatus. Acts of working of the programs include (1) an act of manufacturing, (2) an act of assigning with or without charge, (3) an act of leasing, (4) an act of importing, (5) an act of providing to the public via a bi-directional electronic communications network, and (6) an act of offering for assignment or lease using storefront displays, catalogs, or brochures.

(D) The time elements of the steps which are executed in a time series in each of the flowcharts can be regarded as the necessary elements of the present invention. This being so, a playback method shown by these flowcharts is an invention. If the processing shown in each flowchart is carried out by performing the steps in a time series so as to achieve the intended aim and the intended effect, this is an act of working of the recording method of the present invention.

(E) When recording an AV Clip on the BD-ROM, an extension header may be added to each TS packet in the AV Clip. The extension header is called a TP\_extra\_header, includes an arrival\_time\_stamp and a copy\_permission\_indicator, and has a data length of 4 bytes. TS packets with TP\_extra\_headers (hereafter "EX TS packets") are grouped in units of 32 packets, and each group is written to three sectors. One group made up of 32 EX TS packets has 6,144 bytes (= 32×192), which is equivalent to a size of three sectors that is 6144 bytes (= 2048×3). The 32 EX TS packets contained in the three sectors are called an Aligned Unit.

In a home network connected with an IEEE 1394 connector, the playback apparatus transmits an Aligned Unit in the following manner. The playback apparatus removes a TP\_extra\_header from each of the 32 EX TS packets in the Aligned Unit, encrypts the body of each TS packet according to the DTCP Specification, and outputs the encrypted TS packets. When outputting the TS packets, the playback ap-

paratus inserts an isochronous packet between adjacent TS packets. A position where the isochronous packet is inserted is based on a time shown by an arrival\_time\_stamp of the TP\_extra\_header. The playback apparatus outputs a DTCP\_descriptor, as well as the TS packets. The DTCP\_descriptor corresponds to a copy\_permission\_indicator in the TP\_extra\_header. With the provision of the DTCP\_descriptor indicating "copy prohibited", it is possible to prevent, when using the TS packets in the home network connected with the IEEE 1394 connector, the TS packets from being recorded to other devices.

(F) The above embodiments describe the case where an AV Clip of the Blu-ray Disc Read-Only Format is used as a digital stream, but the present invention can also be realized with a VOB (Video Object) of the DVD-Video Format or the DVD-Video Recording Format. The VOB is a program stream that complies with the ISO/IEC 13818-1 Standard and is obtained by multiplexing a video stream and an audio stream. Also, the video stream in the AV Clip may be an MPEG4 video stream or a WMV video stream. Further, the audio stream in the AV Clip may be a Linear PCM audio stream, an MP3 audio stream, or an MPEG-AAC audio stream.

(G) The movie content described in the above embodiments may be obtained by encoding an analog image signal broadcast by analog broadcasting. Also, the movie content may be stream data made up of a transport stream broadcast by digital broadcasting.

Alternatively, an analog/digital image signal recorded on a videotape may be encoded to obtain content. Also, an analog/digital image signal directly captured by a video camera may be encoded to obtain content. A digital work distributed by a distribution server is applicable too.

(H) Graphics Objects described in the above embodiments is run-length encoded raster data. Run-length encoding is used for compression/encoding of graphics Objects, because the run-length encoding is most suitable for compression and decompression of subtitles. Subtitles have a property in that a continuous length of the same pixel value in a horizontal direction is relatively long. Therefore, by performing compression using run-length encoding, a high compression rate can be attained. In addition, run-length encoding reduces a load for decompression, and is therefore suitable for realizing decoding by software. For the purpose of providing a decoding construction common to subtitles and Buttons, the compression and decompression method used for subtitles is also employed for Buttons. Nevertheless, the use of run-length encoding for graphics Objects is not a limitation of the present invention. For example, graphics Objects may be PNG data. Also, graphics Objects may be vector data instead of raster data. Further,

graphics Objects may be transparent patterns.

(I) Subtitle graphics selected according to a display setting of the playback apparatus may be subjected to display effects of PCSs. For example, graphics of various display modes such as wide screen, pan and scan, and letterbox are recorded on the BD-ROM, and the playback apparatus selects one of these display modes according to a display setting of the television connected with the playback apparatus and displays corresponding graphics. Since the display effects of PCSs are applied to such subtitle graphics, viewability increases. As a result, display effects achieved by using characters which are contained within the body of video can be realized with subtitle graphics displayed according to the display setting. This contributes to high practicality.

(J) The above embodiments describe the case where the playback apparatus includes a Graphics Plane. Alternatively, the playback apparatus may include a line buffer for storing uncompressed pixels of one line. Since conversion to an image signal is performed for each horizontal row (line), conversion to an image signal can equally be performed with the line buffer.

(K) The third embodiment describes the case where button commands for setting PSR10 and PSR11 are written in an ICS, but button commands for setting PSR1, PSR2, and PSR3 may be written in the ICS too. For example, if PSR2 specifies English subtitles, button commands for selecting Japanese subtitles may be provided.

(L) A default Button may be provided on each of an audio selection menu and a subtitle selection menu used for receiving an audio stream selection and a subtitle stream selection. Button information corresponding to such a default Button has button commands for setting PSR1 or PSR2 to an undefined value. If the default Button is activated and these button commands are executed, PSR1 or PSR2 is set to the undefined value, and "Procedure when playback condition is changed" is performed to select an optimal audio stream or PG\_textST\_stream.

(M) The first embodiment describes the case where the three conditions (a) to (c) are used, but the number of conditions may be four or more.

#### Industrial Applicability

**[0345]** The above embodiments disclose the internal construction of the playback apparatus to which the present invention relates, and the playback apparatus can be manufactured in volume based on the disclosed internal construction. In other words, the playback apparatus are capable of being industrially used. Hence the playback apparatus has industrial applicability.

#### Numerical References

##### **[0346]**

5	1 .....	BD drive
	2 .....	Read Buffer
	3 .....	Demultiplexer
	4 .....	Video Decoder
	5 .....	Video Plane
10	9 .....	Presentation Graphics Decoder
	10 .....	Presentation Graphics Plane
	11 .....	adder
	12 .....	Font Generator
	13 .....	Interactive Graphics Decoder
15	14 .....	switch
	15 .....	Interactive Graphics Plane
	16 .....	adder
	17 .....	Controller
	18 .....	Read Buffer
20	19 .....	Demultiplexer
	20 .....	Audio Decoder
	21 .....	switch
	22 .....	switch
	23 .....	scenario memory
25	24 .....	control unit
	25 .....	switch
	26 .....	CLUT unit
	27 .....	CLUT unit
	28 .....	PSR set
30	29 .....	operation reception unit
	30 .....	transition control unit
	200 .....	playback apparatus
	300 .....	television
35	400 .....	remote control

#### **Claims**

1. A playback apparatus for playing back a digital stream generated by multiplexing a plurality of elementary streams, comprising:
  - a judgment unit operable to judge, for each elementary stream, which of a plurality of predetermined conditions the elementary stream satisfies; and
  - a playback unit operable to assign a priority to each elementary stream according to a pattern of conditions the elementary stream satisfies, and select and play back a highest-priority elementary stream.
2. The playback apparatus of Claim 1, wherein the playback unit assigns a higher priority to the elementary stream if the elementary stream satisfies more conditions.
3. The playback apparatus of Claim 1, wherein:

- the plurality of predetermined conditions include a first condition, a second condition, and a third condition;  
the first condition is that the playback apparatus has a capability of playing back the elementary stream;  
the second condition is that a language attribute of the elementary stream matches a language setting of the playback apparatus;  
the third condition is that a channel attribute of the elementary stream is surround sound and the playback apparatus has a surround output capability; and  
the playback unit assigns a higher priority to the elementary stream if the elementary stream satisfies the first condition and the second condition, than if the elementary stream satisfies the first condition and the third condition.
4. The playback apparatus of Claim 1, further comprising  
a status register, wherein  
the playback unit performs the selection by setting a stream number of the highest-priority elementary stream in the status register.
5. The playback apparatus of Claim 4, wherein:  
  
a plurality of sets of playback section information are recorded on a recording medium;  
the judgment by the judgment unit and the selection by the playback unit are performed when playback according to one of the plurality of sets of playback section information begins; and  
the status register is set to be invalid when the playback according to the set of playback section information ends.
6. The playback apparatus of Claim 4, further comprising:  
  
an acquisition unit operable to acquire, when a stream switching request is made, a switching destination stream number; and  
a setting unit operable to set, if the switching destination stream number is valid, the switching destination stream number in the status register, wherein:  
  
if the switching destination stream number is invalid, a set value of the status register is maintained; and  
the judgment by the judgment unit and the selection by the playback unit are performed if the switching destination stream number is a predetermined undefined value.
7. The playback apparatus of Claim 6, further comprising  
a reception unit operable to receive a user operation, wherein  
the acquisition unit acquires the switching destination stream number based on the user operation received by the reception unit.
8. The playback apparatus of Claim 6, further comprising  
an execution unit operable to execute a command recorded on a recording medium, wherein  
the acquisition unit acquires the switching destination stream number based on the command executed by the execution unit.
9. The playback apparatus of Claim 6, wherein  
the switching destination stream number is invalid if the switching destination stream number exceeds a number of entries in a predetermined table.
10. The playback apparatus of Claim 4, further comprising  
a setting unit operable to set a predetermined undefined value in the status register when a recording medium is loaded to the playback apparatus, wherein  
the judgment by the judgment unit and the selection by the playback unit are performed if a set value of the status register is the predetermined undefined value.
11. A computer-readable program used for enabling a computer to play back a digital stream generated by multiplexing a plurality of elementary streams, the program enabling the computer to perform the steps of:  
  
judging, for each elementary stream, which of a plurality of predetermined conditions the elementary stream satisfies; and  
assigning a priority to each elementary stream according to a pattern of conditions the elementary stream satisfies, and selecting and playing back a highest-priority elementary stream.
12. A playback method of playing back a digital stream generated by multiplexing a plurality of elementary streams, comprising the steps of:  
  
judging, for each elementary stream, which of a plurality of predetermined conditions the elementary stream satisfies; and  
assigning a priority to each elementary stream according to a pattern of conditions the elementary stream satisfies, and selecting and playing back a highest-priority elementary stream.

FIG.1A

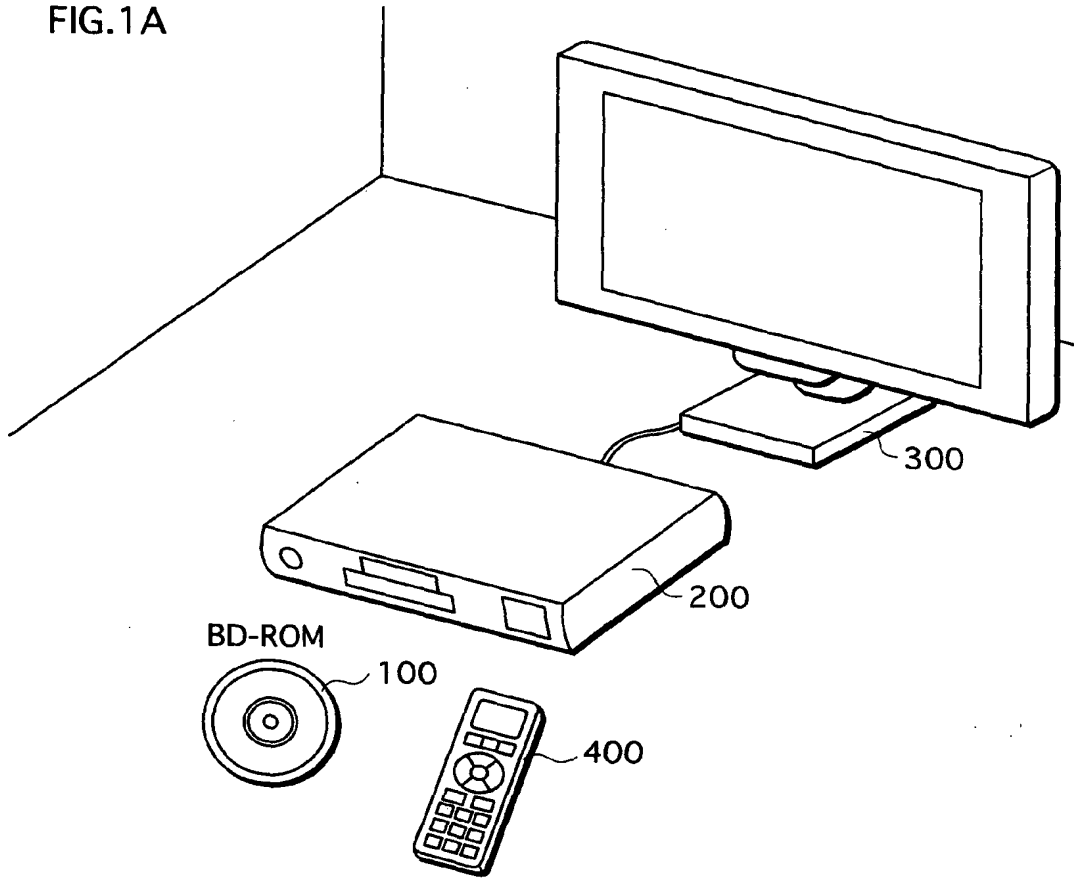
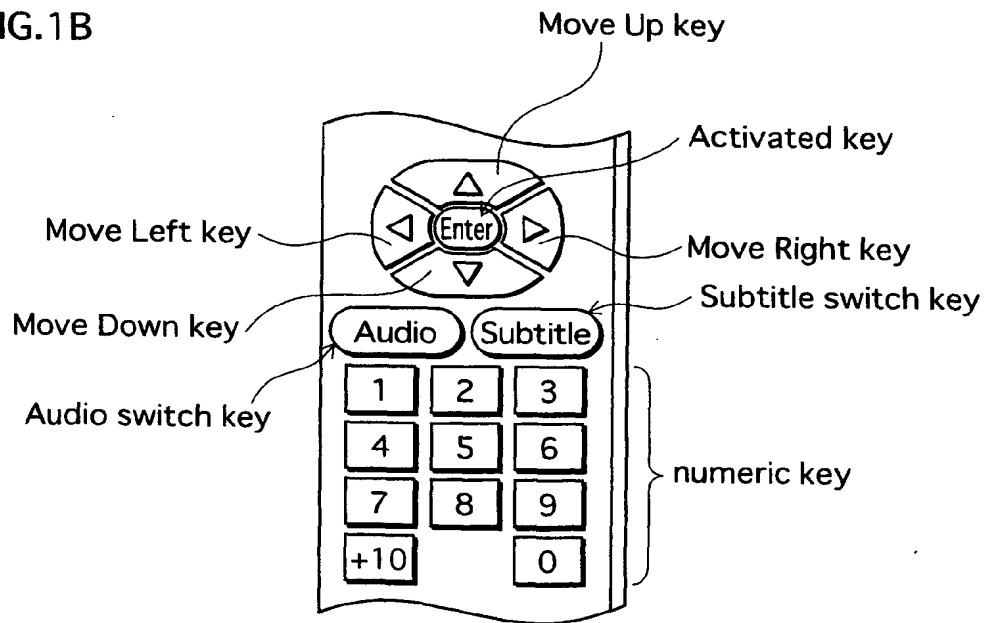
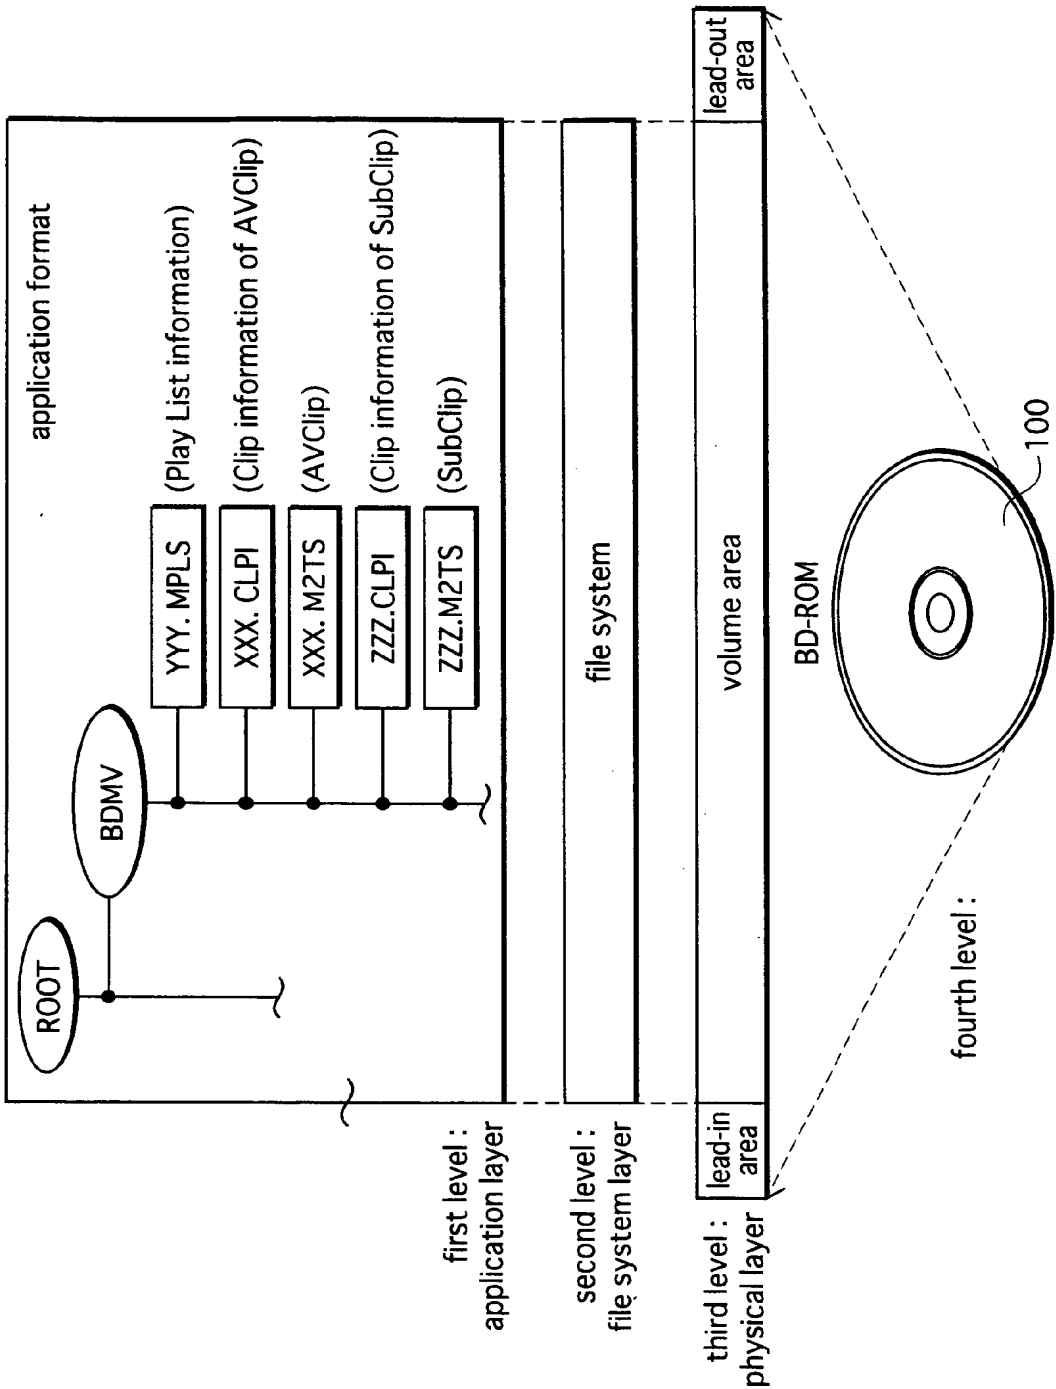
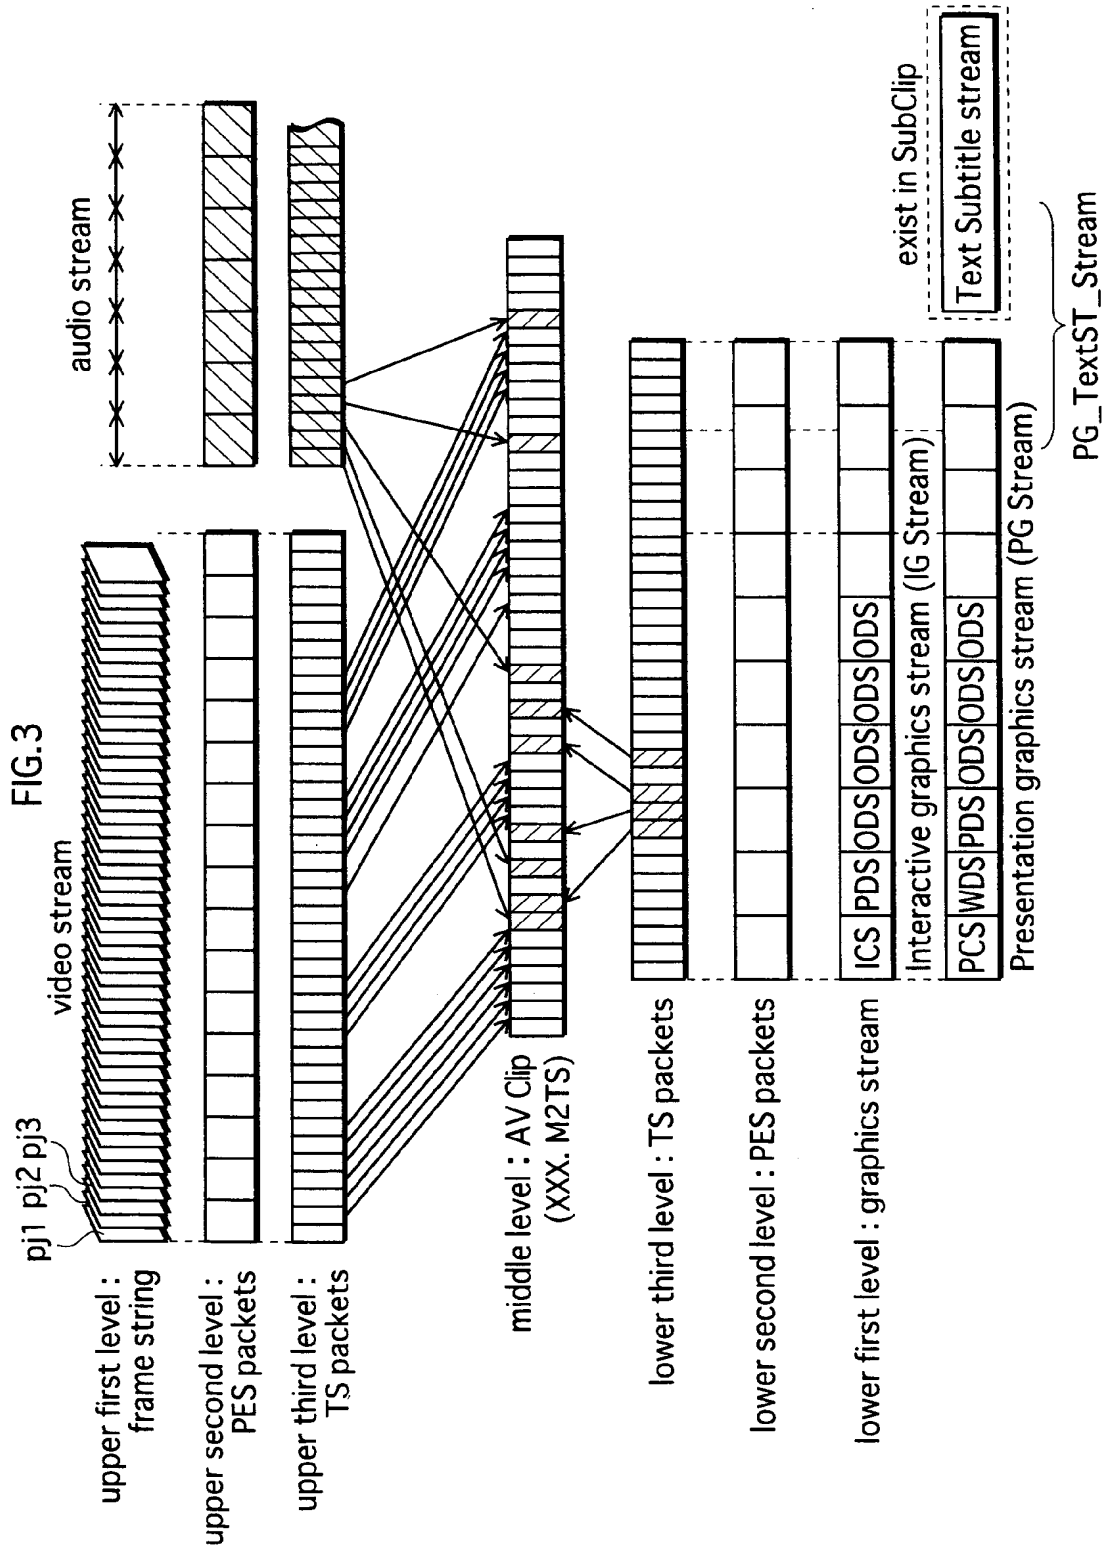


FIG.1B







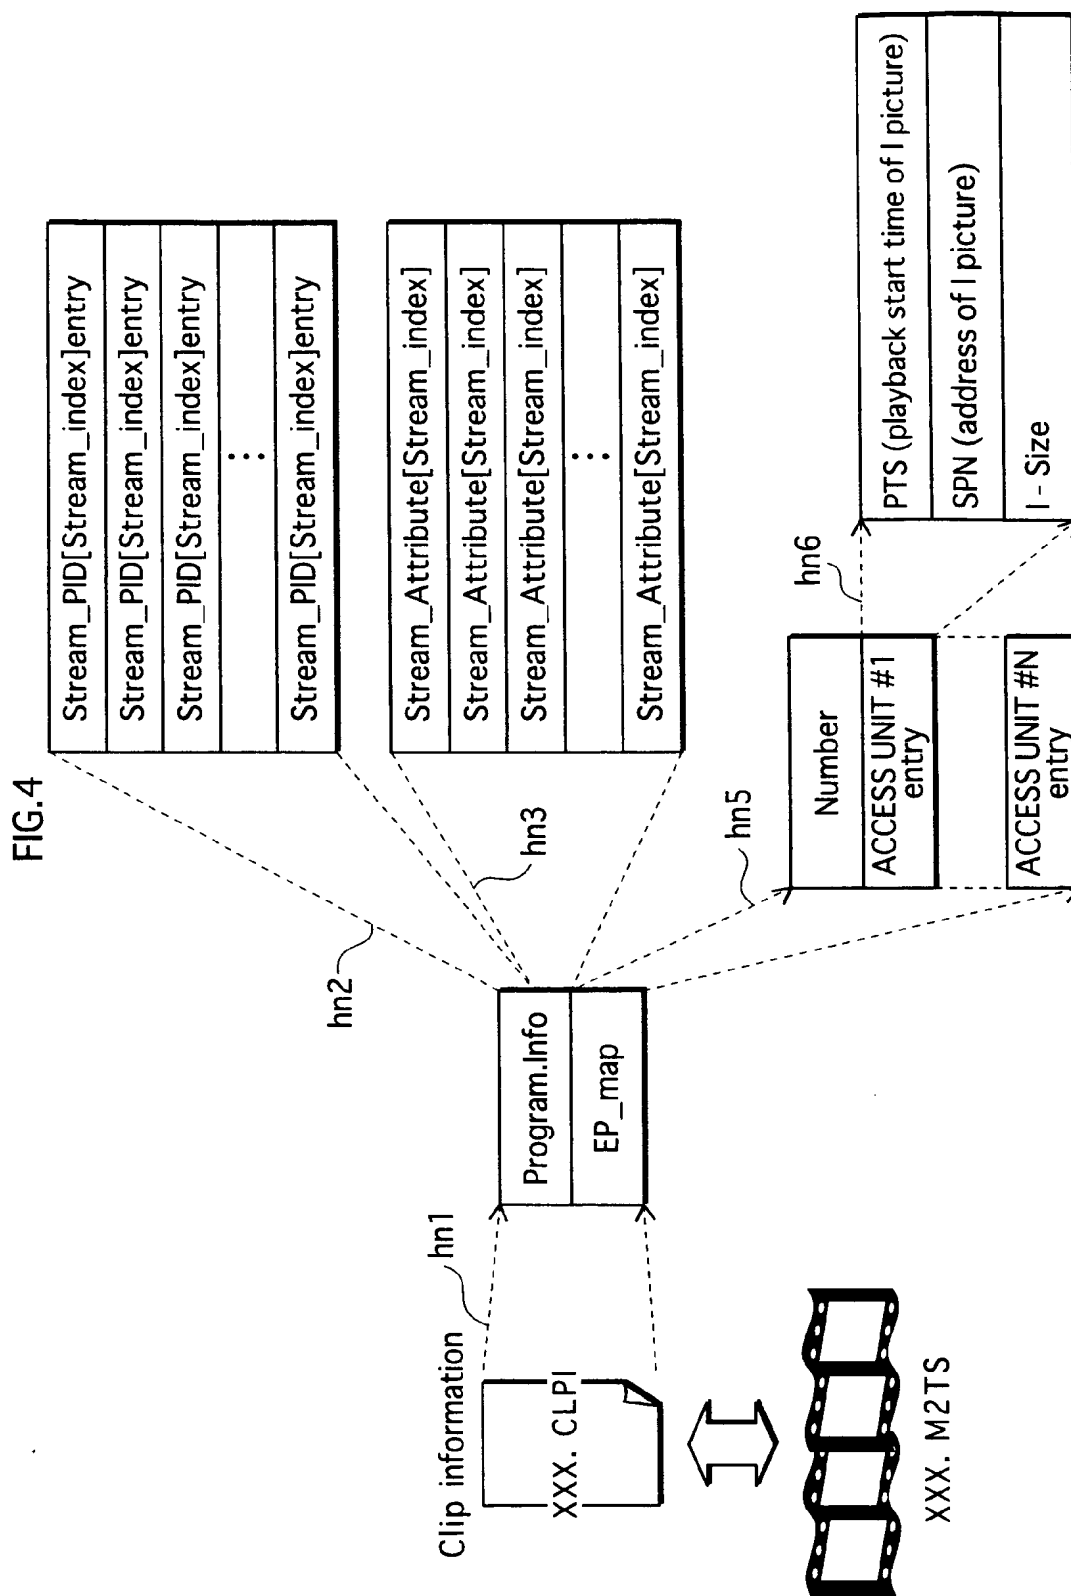


FIG.5

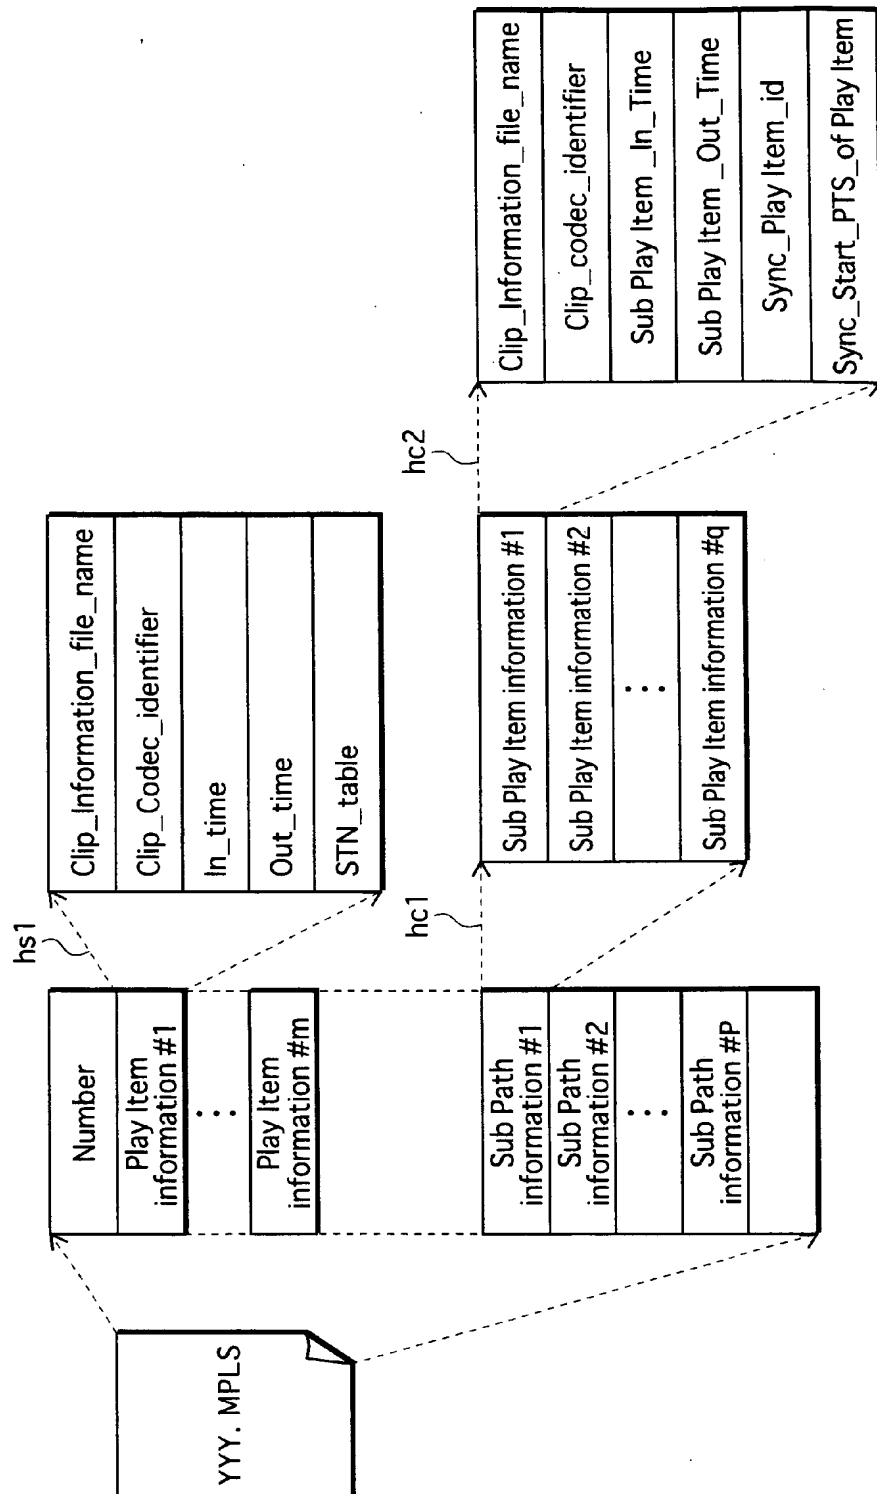




FIG.6

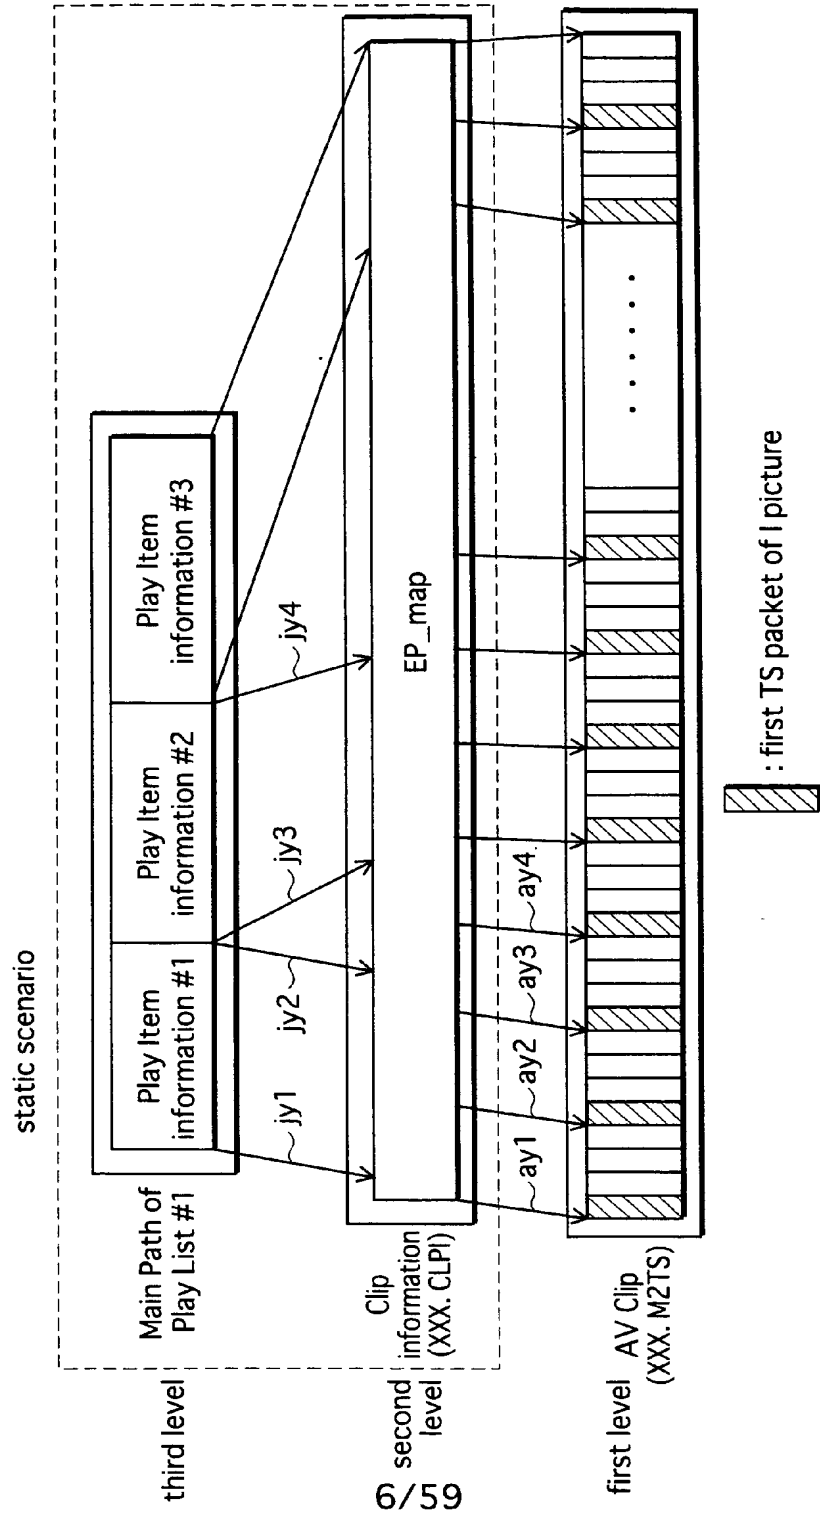


FIG.7

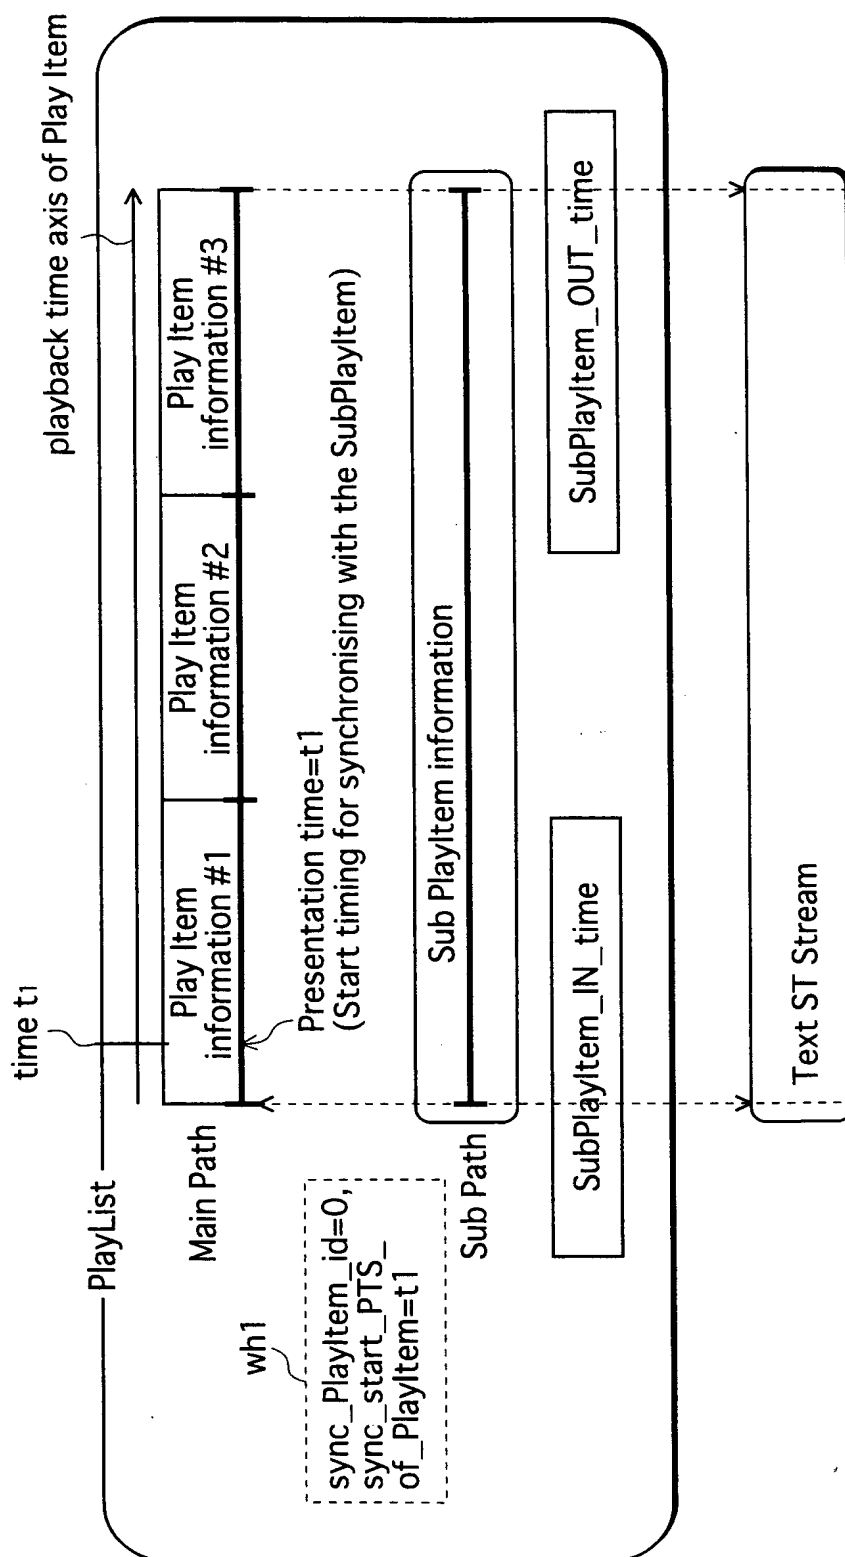


FIG.8

STN_table	
number_of_video_stream_entries	
number_of_audio_stream_entries	
number_of_PG_textST_stream_entries	
number_of_IG_stream_entries	
video_stream	{ entry-attribute
audio_stream	entry-attribute
	entry-attribute
	entry-attribute
	entry-attribute
	:
	entry-attribute
PG_TextST_stream	entry-attribute
	entry-attribute
	entry-attribute
	entry-attribute
	:
	entry-attribute
IG_stream	entry-attribute
	entry-attribute

FIG. 9A entry-attribute of video\_stream




FIG. 9B entry-attribute of audio\_stream

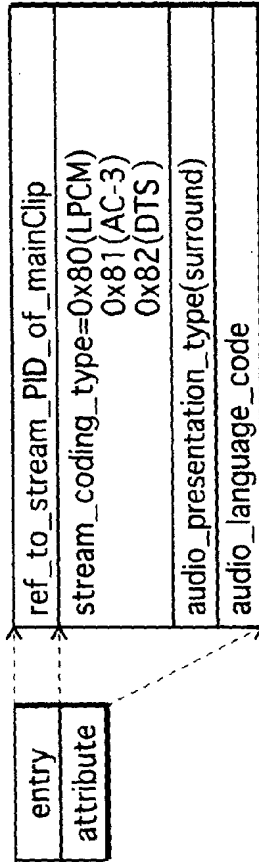


FIG. 9C entry-attribute of PG stream





FIG. 9E entry-attribute of IG\_stream



entry-attribute of text ST stream




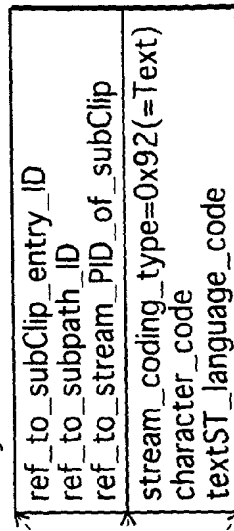


FIG. 9D



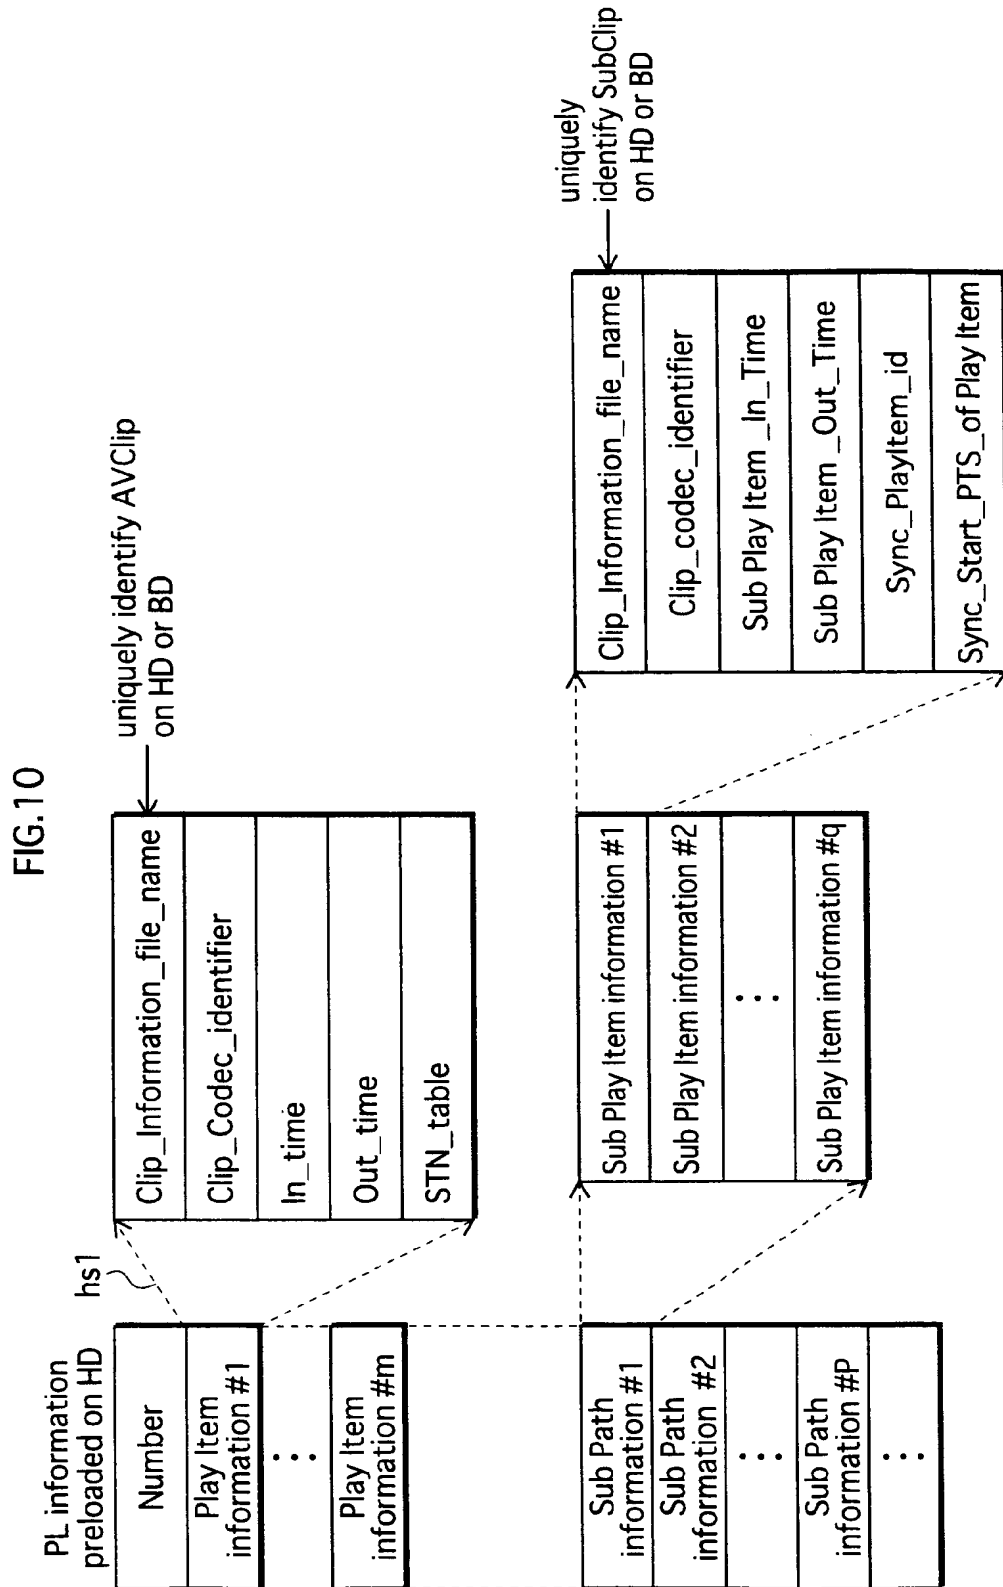

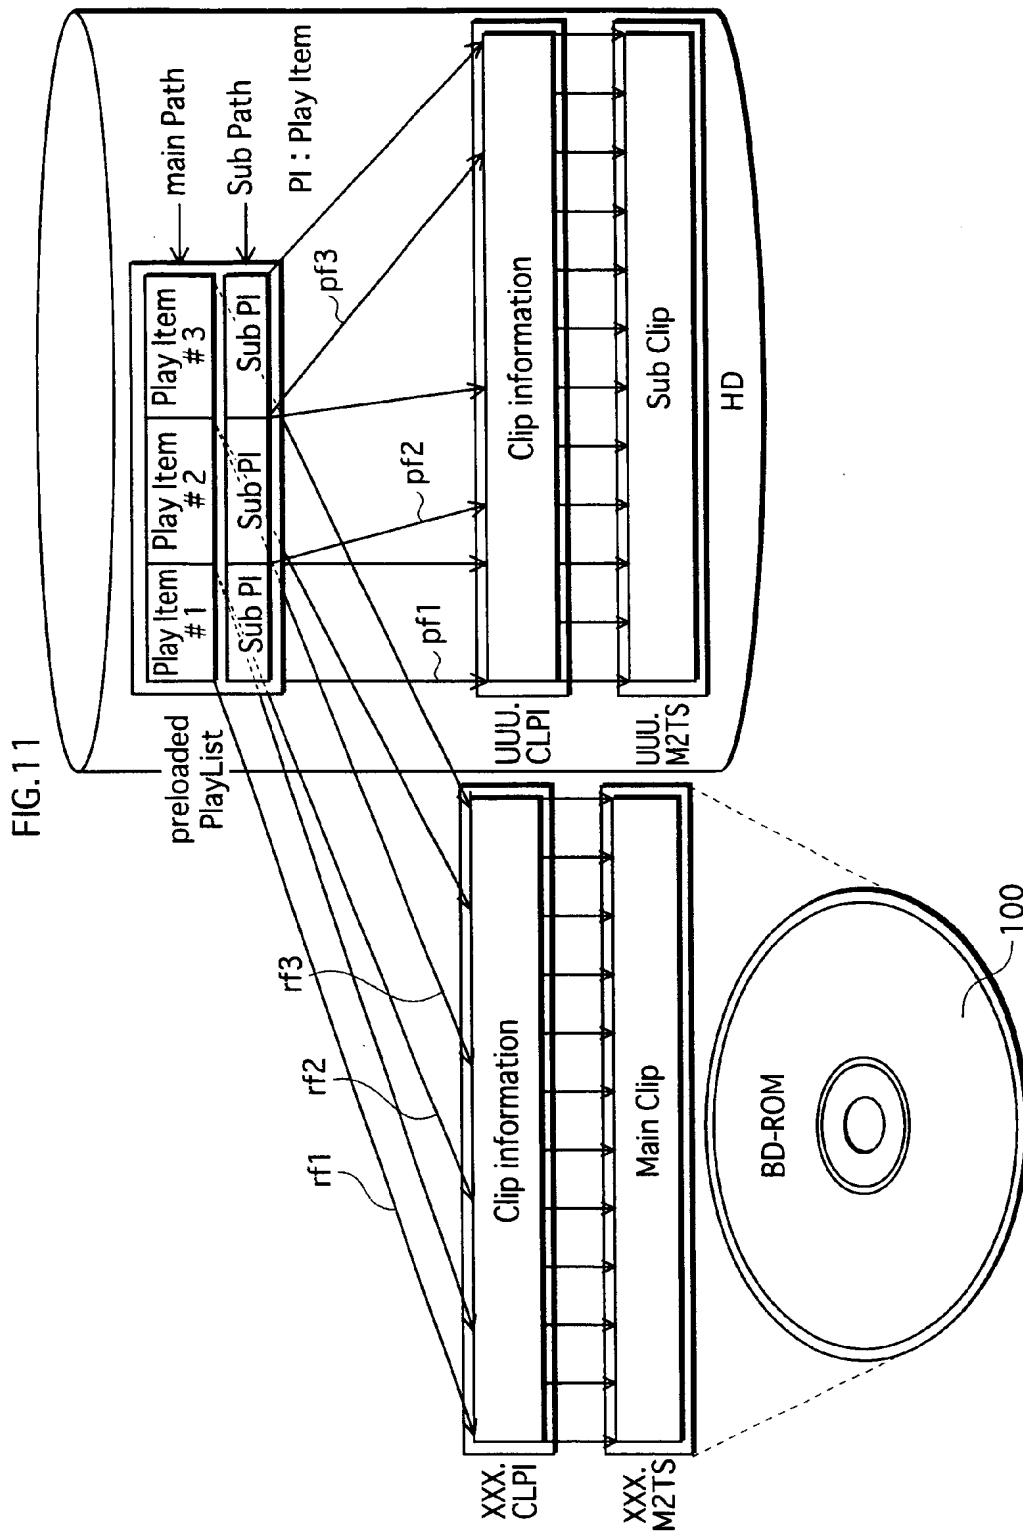

User Operation FIG.12

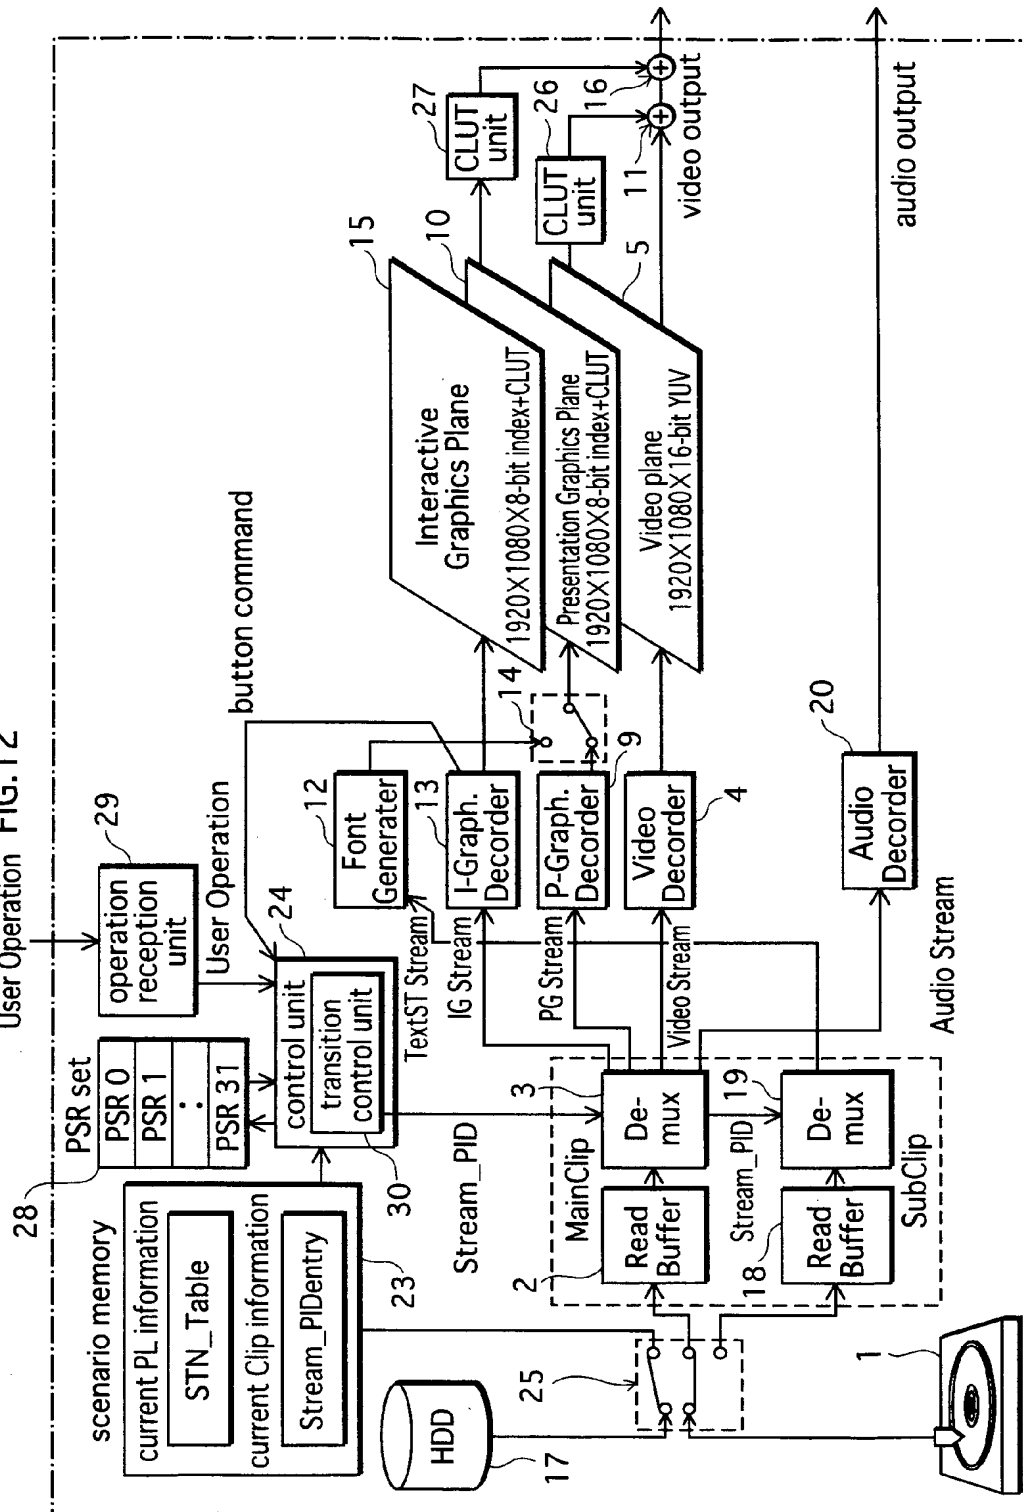


FIG. 13

PSR 0	Interactive Graphics	Audio stream number	...	1 to 32 : Audio stream number 0xFF : Audio stream is not selected or no Audio stream
PSR 1	Audio	disp_flag	...	0b : Display of Presentation Graphics and Text subtitle is disabled 1b : Display of Presentation Graphics and Text subtitle is enabled
PSR 2	Presentation graphics and Text subtitle	Presentation Graphics and Text subtitle stream number	...	1 to 256 : Presentation Graphics stream and Text subtitle stream number 0xFFFF : Presentation Graphics stream or Text subtitle stream is not selected or Presentation Graphics stream and no Text subtitle stream
PSR 3	Angle			
PSR 4	Title			
PSR 5	Chapter			
PSR 6	PlayList			
PSR 14	Video Configuration	LPCM capability	...	0001 <sub>b</sub> : Stereo capable 0010 <sub>b</sub> : Surround capable 0000 <sub>b</sub> : Incapable
PSR 15	Audio Configuration	AC-3 capability	...	0001 <sub>b</sub> : Stereo capable 0010 <sub>b</sub> : Surround capable 0000 <sub>b</sub> : Incapable
PSR 16	Audio Language	DTS capability	...	0001 <sub>b</sub> : Stereo capable 0010 <sub>b</sub> : Surround capable 0000 <sub>b</sub> : Incapable
PSR 17	Presentation Graphics and Text subtitle Language	Language Code	...	0xFFFF : Not Specified Others : Language Code
PSR 18	Menu Language			
PSR 19	-			
.	.			
PSR 29	-			
PSR 30	Text Capability	Text subtitle capability	...	0000000000000000 <sub>b</sub> : Text subtitle incapable Player 1000000000000000 <sub>b</sub> : Text subtitle capable Player
PSR 31	Player Version			



FIG.14

PSR 0	Interactive Graphics
PSR 1	Audio
PSR 2	Presentation graphics and Text subtitle
PSR 3	Angle
PSR 4	Title
PSR 5	Chapter
PSR 6	PlayList
PSR 7	PlayItem
PSR 8	Presentation Time
PSR 9	Timer
PSR 10	Selected Button
PSR 11	Menu Page
PSR 12	Selected Style
PSR 13	Parental

0 : Top Menu  
1 to 100 : Title number

1 to 999 : Chapter number  
0xFFFF : Chapter number is invalid

0 to 999 : PlayList id

0 to 255 : PlayItem id

0 to 0xFFFFFFFF : Presentation Time

FIG. 15A

## Status and Transition for PSR1

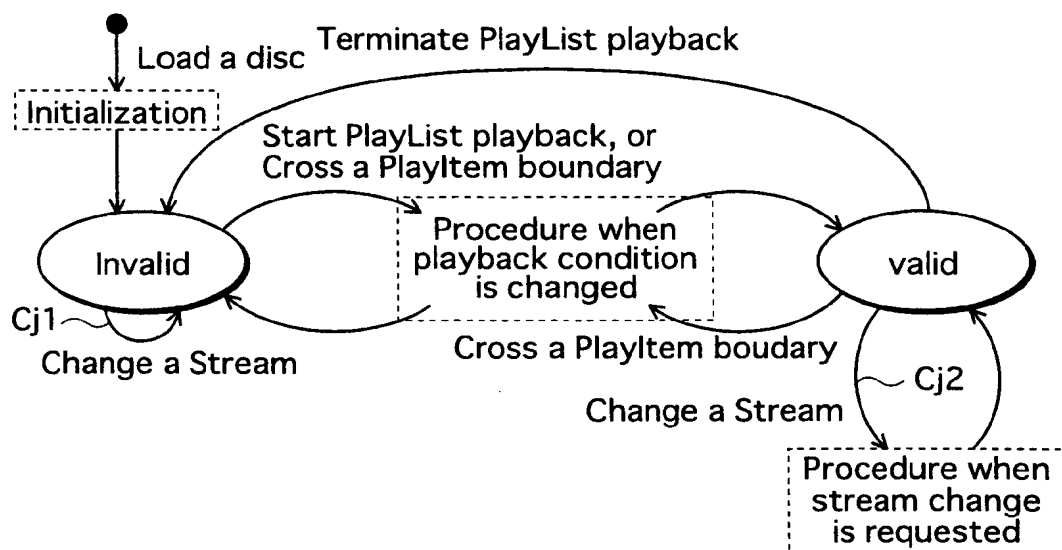


FIG. 15B

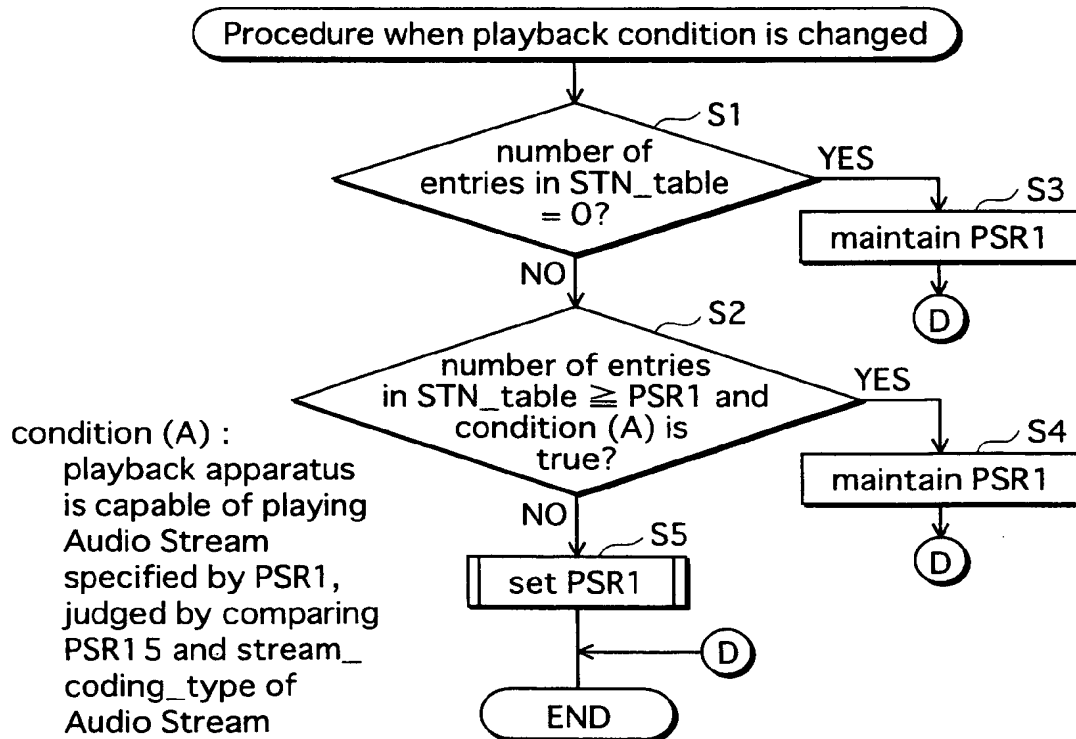


FIG. 16

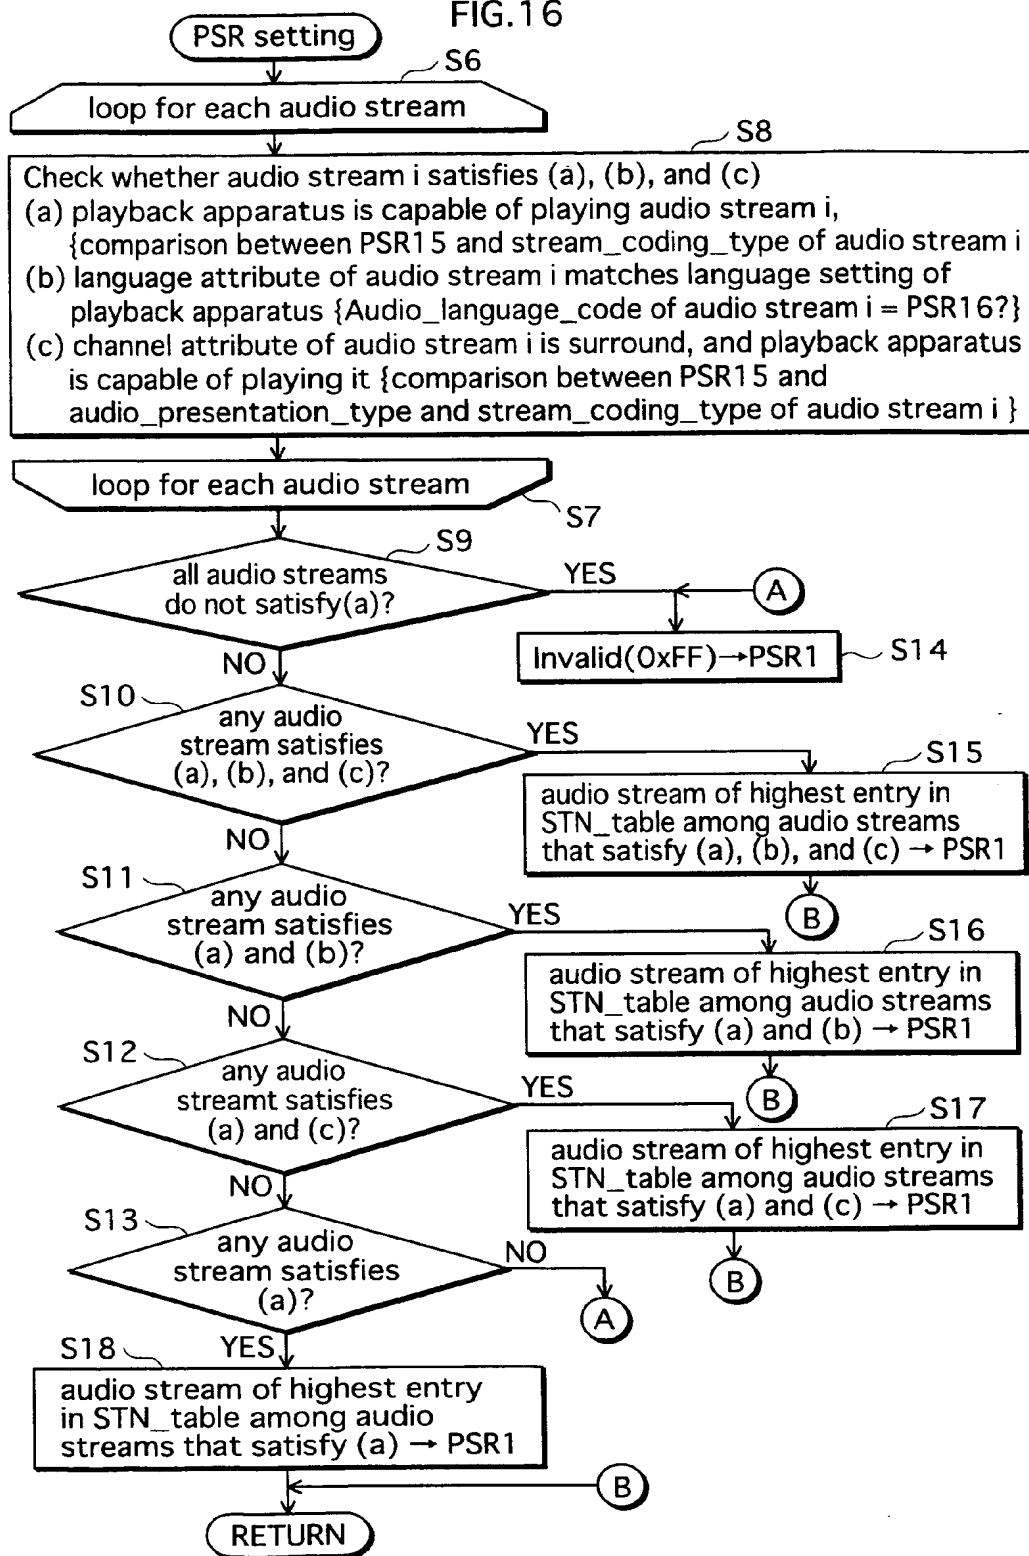


FIG.17

Presentation Capability of Player		
	stereo output	surround output
stereo	playable○	playable○
surround	playable after downmixing○	playable○

channel attribute of Audio Stream

the only combination that satisfies (c)

FIG.18

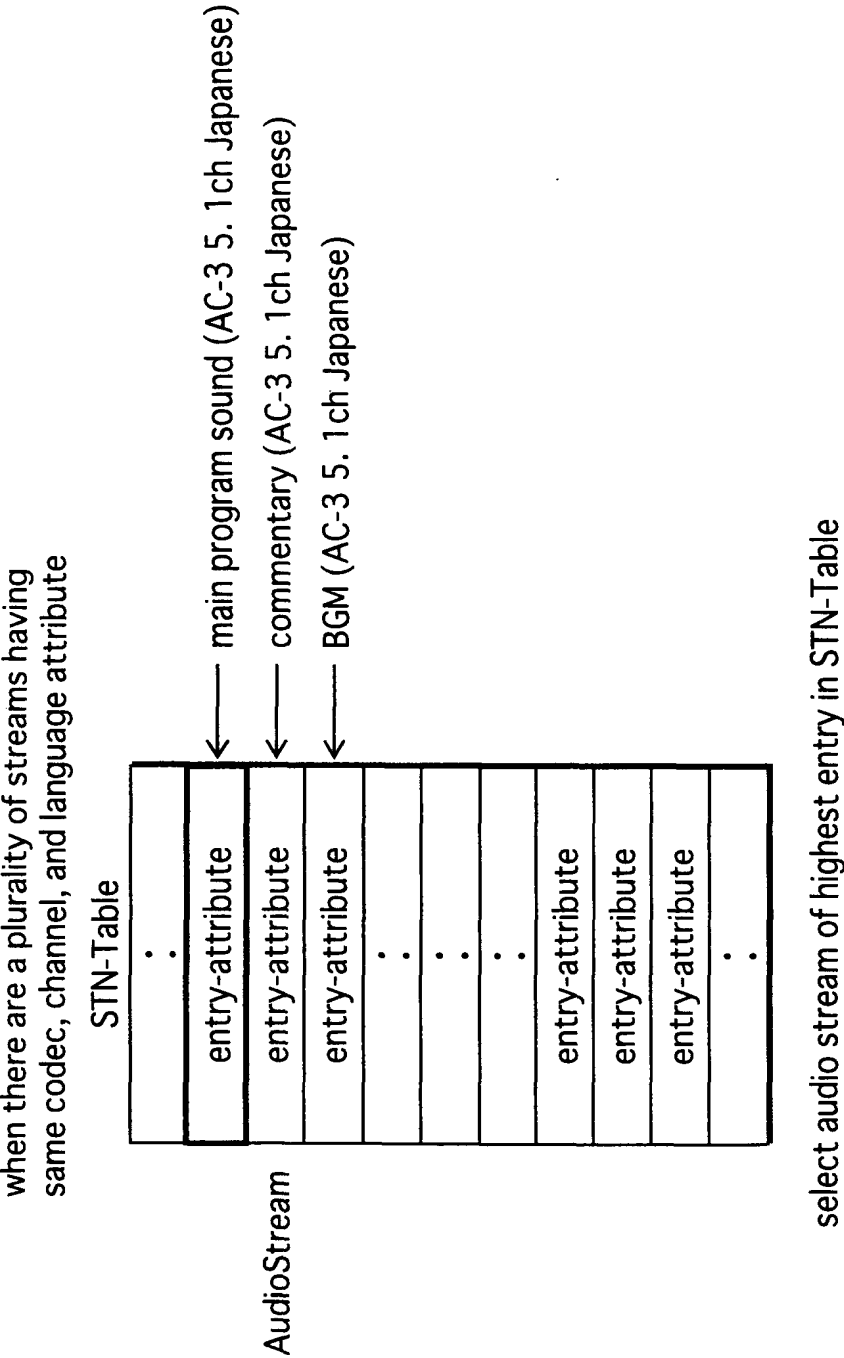


FIG.19

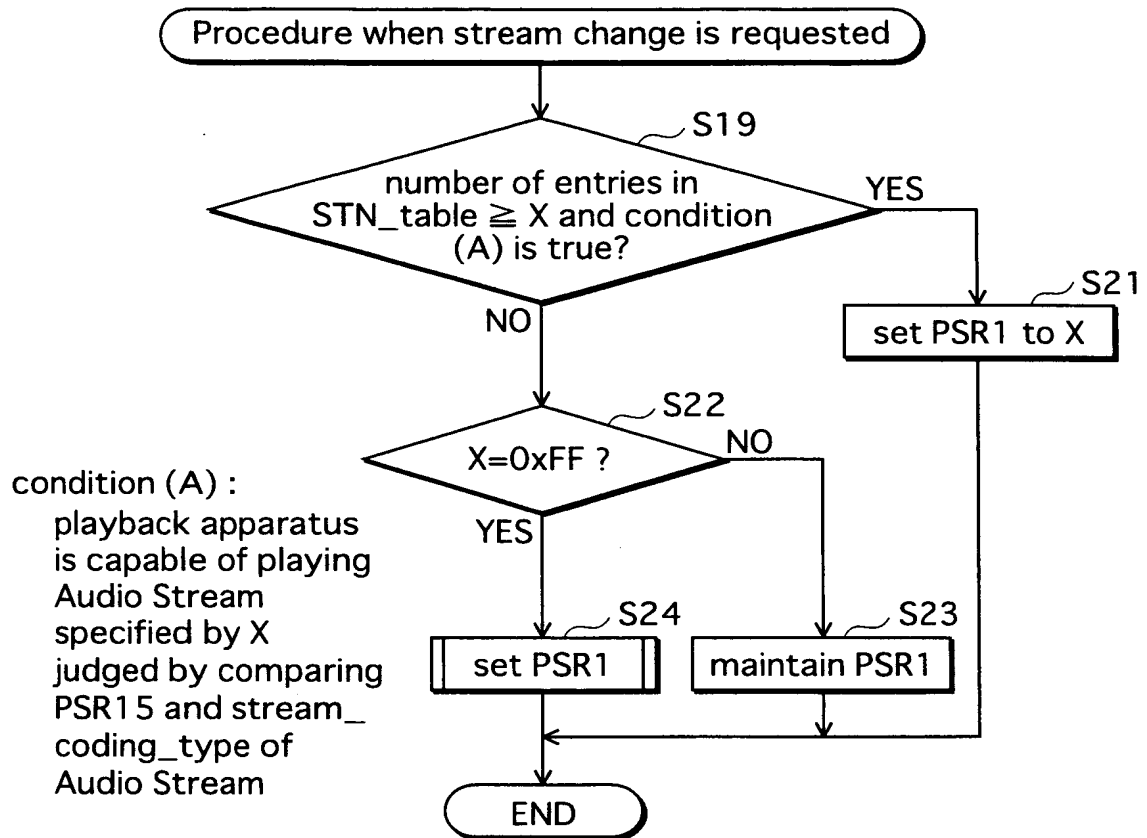


FIG.20A

Presentation Capability(PSR 15) = LPCM ○ AC-3 ○ DTS × Language Setting (PSR 16) = Japanese Surrou d Capability(PSR 15) = capable
--

FIG.20B

Audio Stream 1	AC-3	2ch	English
Audio Stream 2	AC-3	5.1ch	English
Audio Stream 3	DTS	5.1ch	English
Audio Stream 4	AC-3	2ch	Japanese
Audio Stream 5	AC-3	5.1ch	Japanese
Audio Stream 6	DTS	5.1ch	Japanese

FIG.20C

	Codec	Channel	Language	Check Presentation capability(a)	Check language language (b)	Check surround Capability(c)	Priority
Audio Stream 1	AC-3	2ch	English	○	×	×	4
Audio Stream 2	AC-3	5.1ch	English	○	×	○	3
Audio Stream 3	DTS	5.1ch	English	×	—	—	—
Audio Stream 4	AC-3	2ch	Japanese	○	○	×	2
Audio Stream 5	AC-3	5.1ch	Japanese	○	○	○	1
Audio Stream 6	DTS	5.1ch	Japanese	×	—	—	—

FIG. 21A

Presentation Capability(PSR 15) = LPCM ○ AC-3 ○ DTS ×
Language Setting (PSR 16) = Japanese
Surround Capability(PSR 15) = incapable

FIG. 21B

Audio Stream 1	AC-3	2ch	English	Author prefers original stereo playback to downmixed playback
Audio Stream 2	AC-3	5.1ch	English	
Audio Stream 3	DTS	5.1ch	English	
Audio Stream 4	AC-3	2ch	Japanese	
Audio Stream 5	AC-3	5.1ch	Japanese	
Audio Stream 6	DTS	5.1ch	Japanese	

FIG. 21C

	Codec	Channel	Language	Check Presentation capability(a)	Check language (b)	Check surround Capability(c)	Priority
Audio Stream 1	AC-3	2ch	English	○	×	×	2
Audio Stream 2	AC-3	5.1ch	English	○	×	×	2
Audio Stream 3	DTS	5.1ch	English	×	—	—	—
Audio Stream 4	AC-3	2ch	Japanese	○	○	×	1
Audio Stream 5	AC-3	5.1ch	Japanese	○	○	×	1
Audio Stream 6	DTS	5.1ch	Japanese	×	—	—	—

Since there are two audio streams having  
same priority, Audio Stream 4 having  
higher entry in STN\_Table is selected



FIG.22A

Presentation Capability(PSR 15) = LPCM ○ AC-3 ○ DTS X
Language Setting (PSR 16) = Japanese
Surround Capability(PSR 15) = incapable

FIG.22B

Audio Stream 2	AC-3	5.1ch	English
Audio Stream 1	AC-3	2ch	English
Audio Stream 3	DTS	5.1ch	English
Audio Stream 5	AC-3	5.1ch	Japanese
Audio Stream 4	AC-3	2ch	Japanese
Audio Stream 6	DTS	5.1ch	Japanese

Author prefers downmixed playback to original stereo playback

FIG.22C

	Codec	Channel	Language	Check Presentation capability(a)	Check language (b)	Check surround Capability(c)	Priority
Audio Stream 2	AC-3	5.1ch	English	○	X	X	2
Audio Stream 1	AC-3	2ch	English	○	X	X	2
Audio Stream 3	DTS	5.1ch	English	X	—	—	—
Audio Stream 5	AC-3	5.1ch	Japanese	○	○	X	1
Audio Stream 4	AC-3	2ch	Japanese	○	○	X	1
Audio Stream 6	DTS	5.1ch	Japanese	X	—	—	—

Since there are two audio streams having same priority, Audio Stream 5 having higher entry in STN\_Table is selected

FIG.23A

## Status and Transition for PSR2

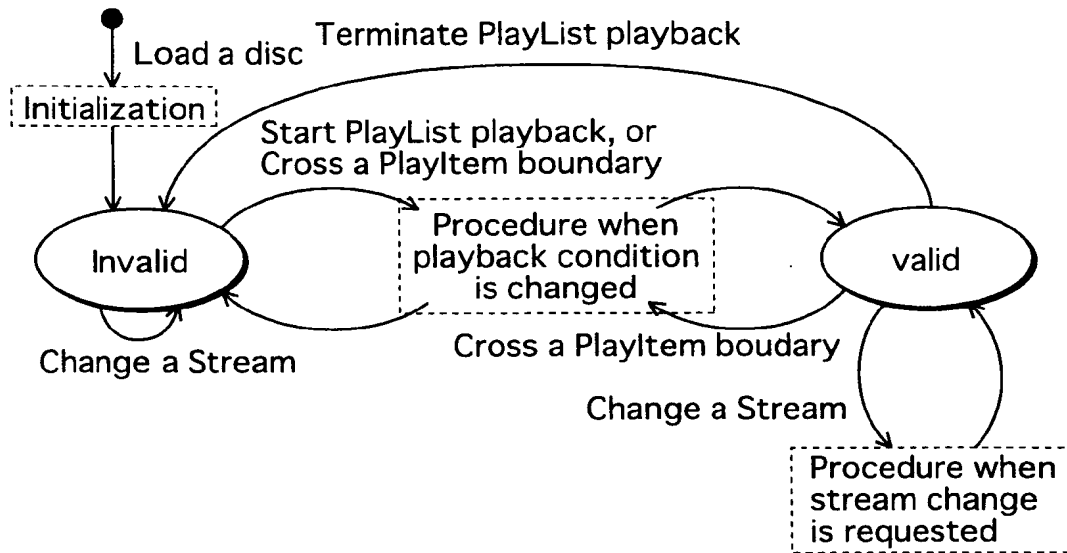


FIG.23B

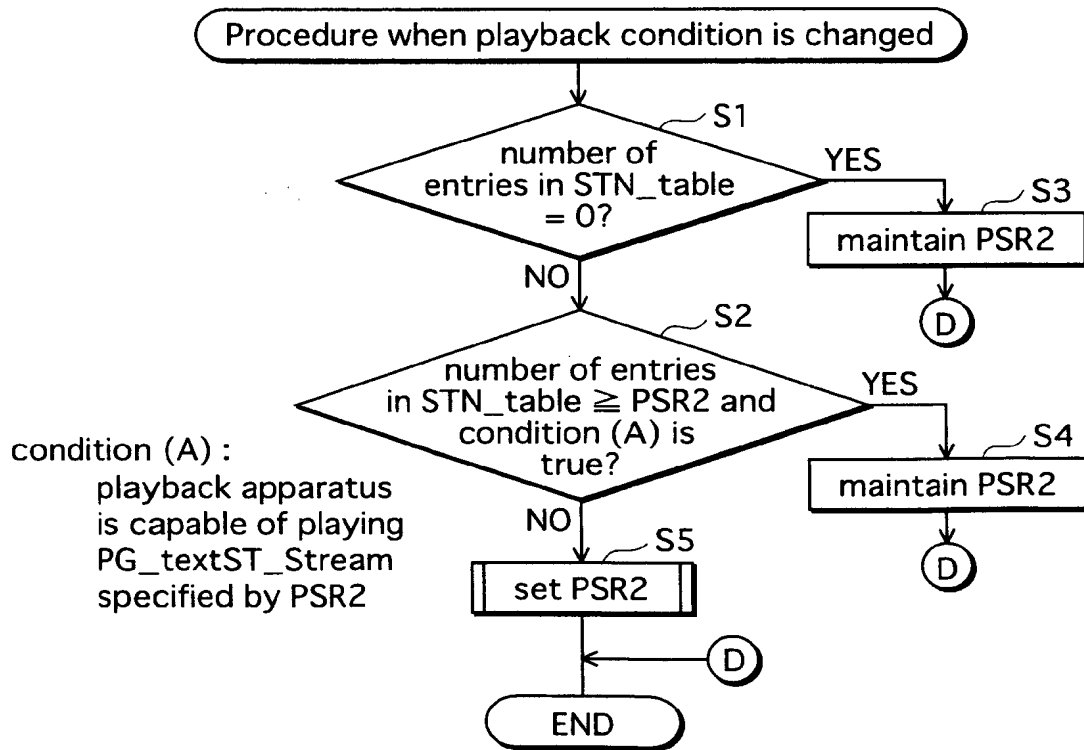


FIG.24

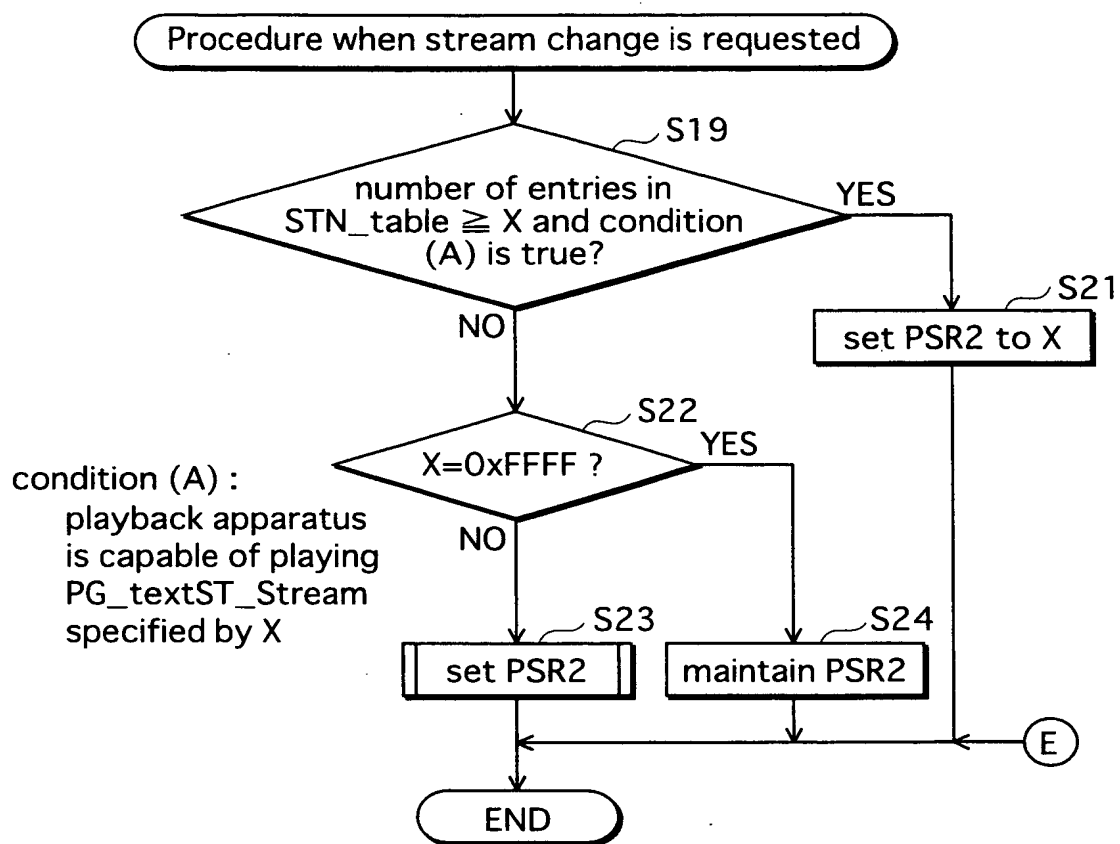


FIG.25

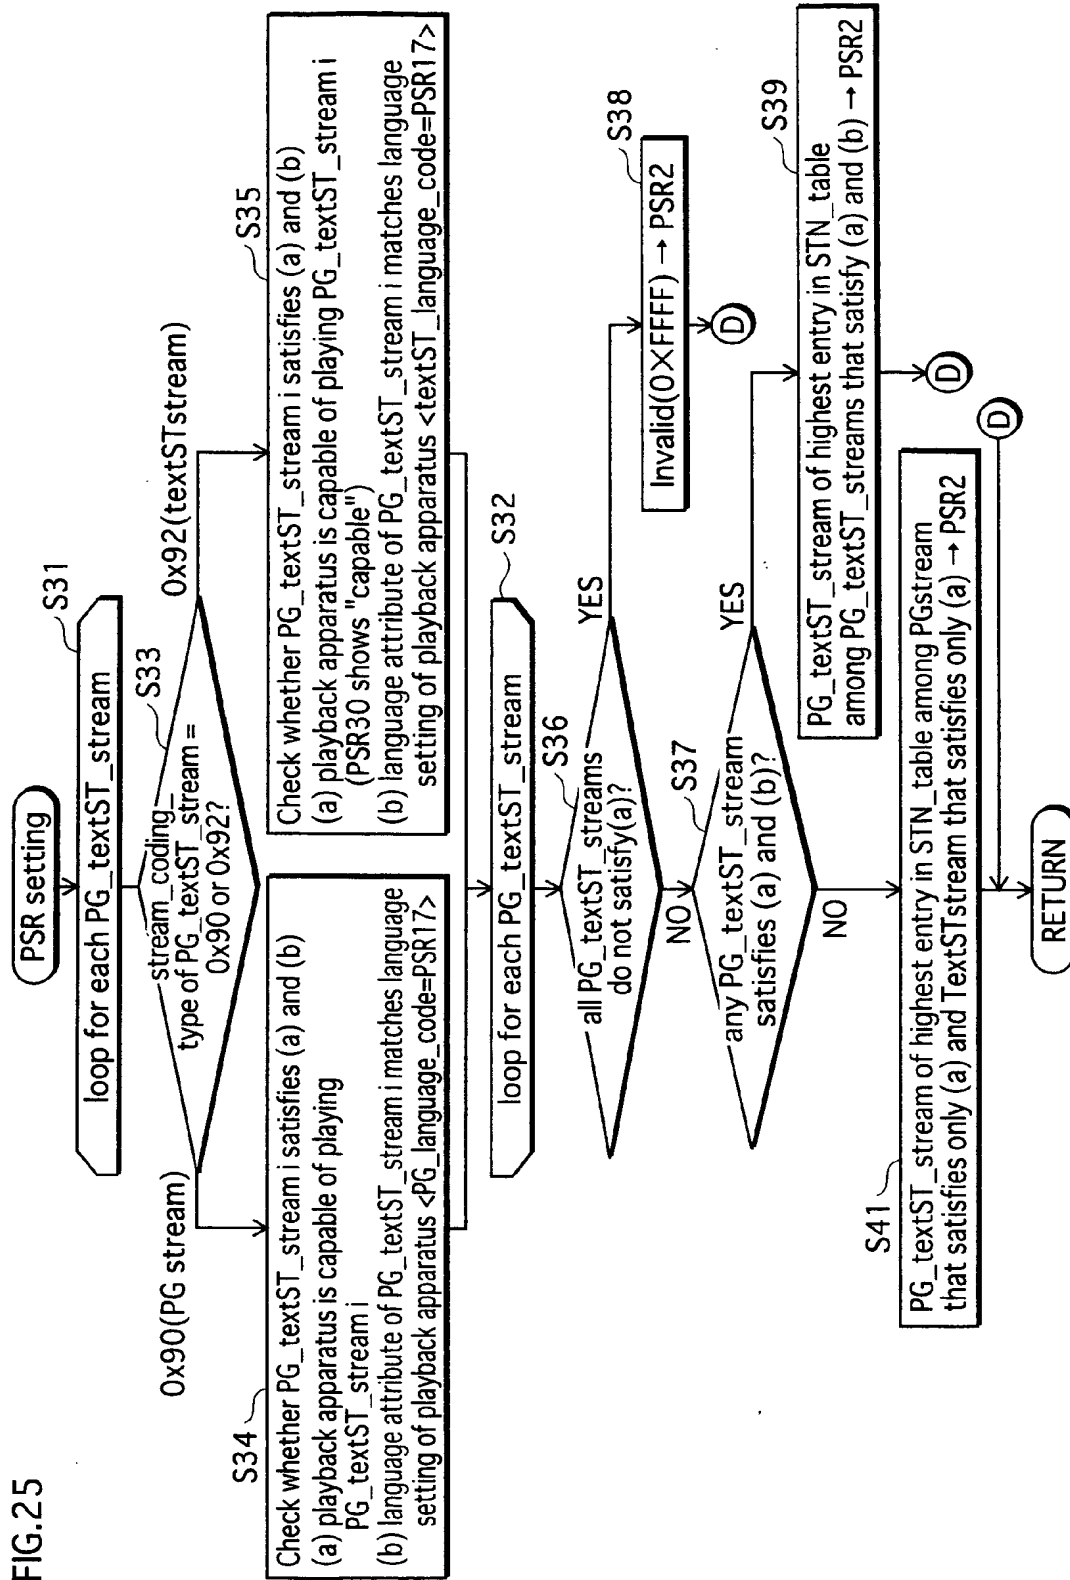


FIG.26A

Presentation Capability(PSR 15) = PGstream ○ TextSTstream × Language Setting (PSR 16) = Japanese
---

FIG.26B


PG_TextST_stream1	TextSTstream	English
PG_TextST_stream2	PGstream	English
PG_TextST_stream3	TextSTstream	Japanese
PG_TextST_stream4	PGstream	Japanese

FIG.26C

	Coding_Type	Language	Check Presentation capability(a)	Check language (b)	Priority
PG_TextST_stream1	TextSTstream	English	×	—	—
PG_TextST_stream2	PGstream	English	○	×	2
PG_TextST_stream3	TextSTstream	Japanese	×	—	—
PG_TextST_stream4	PGstream	Japanese	○	○	1

FIG.27

when there are a plurality of PG\_textST\_streams that satisfy(a) and (b)

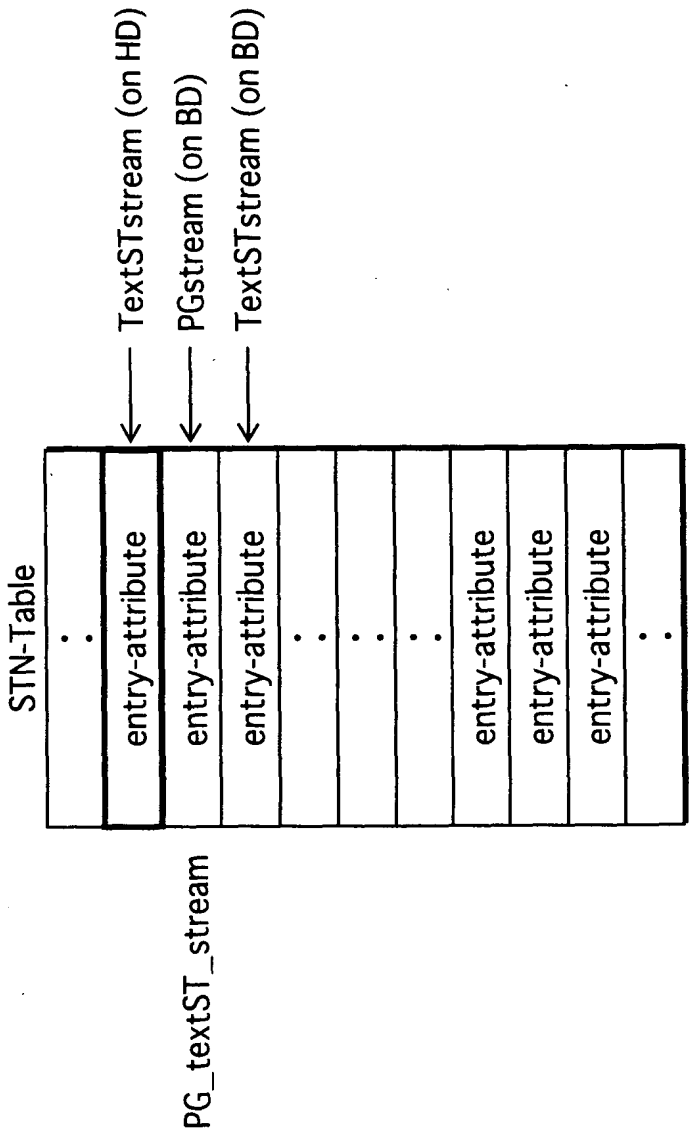

select PG\_textST\_stream having highest entry in STN\_Table

FIG.28

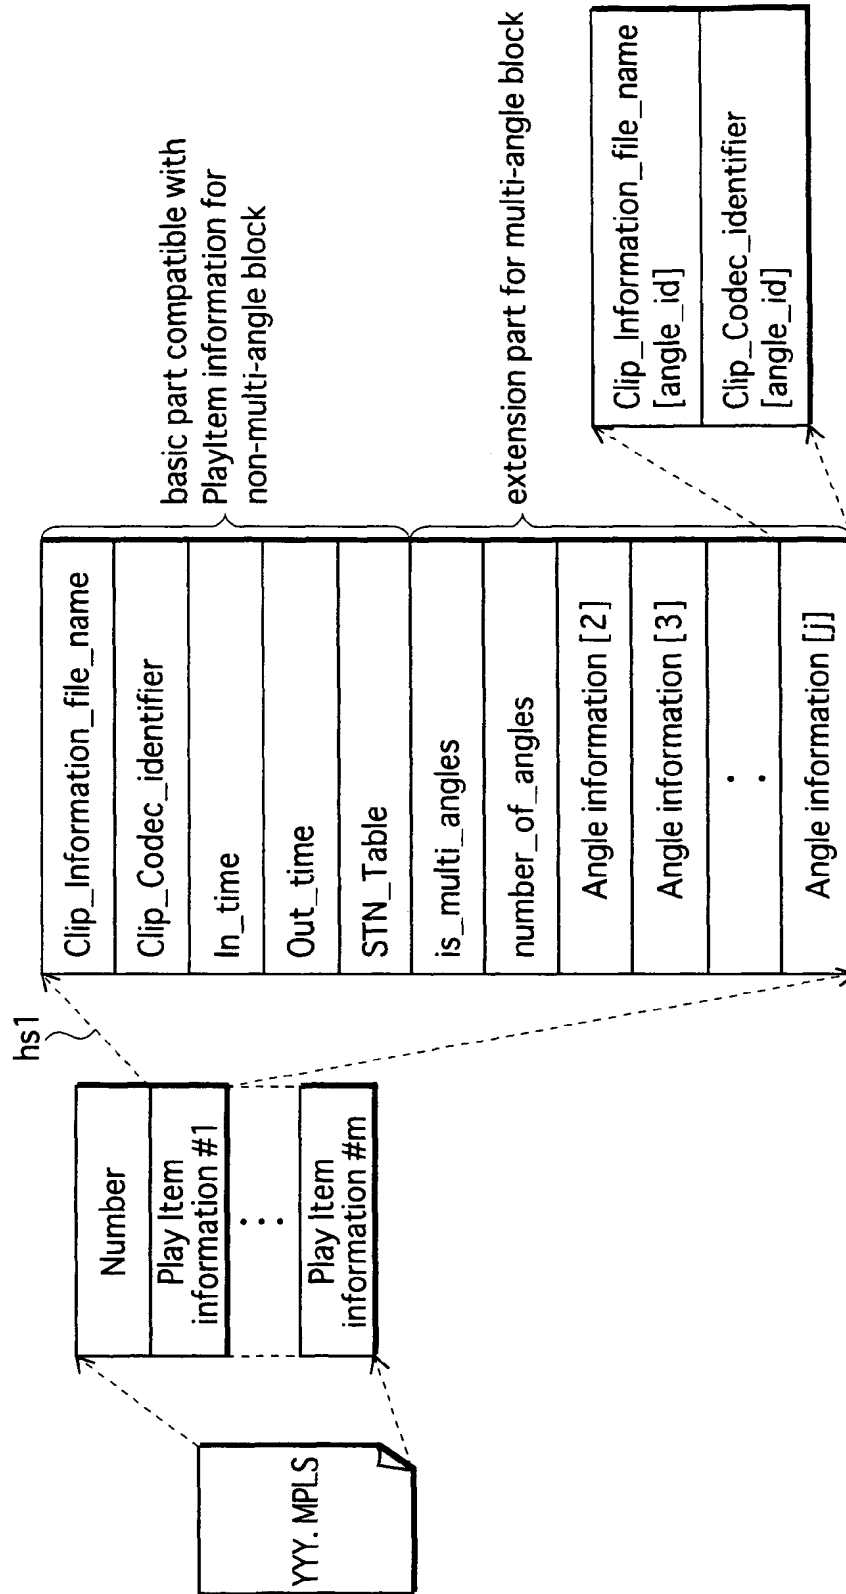


FIG.29

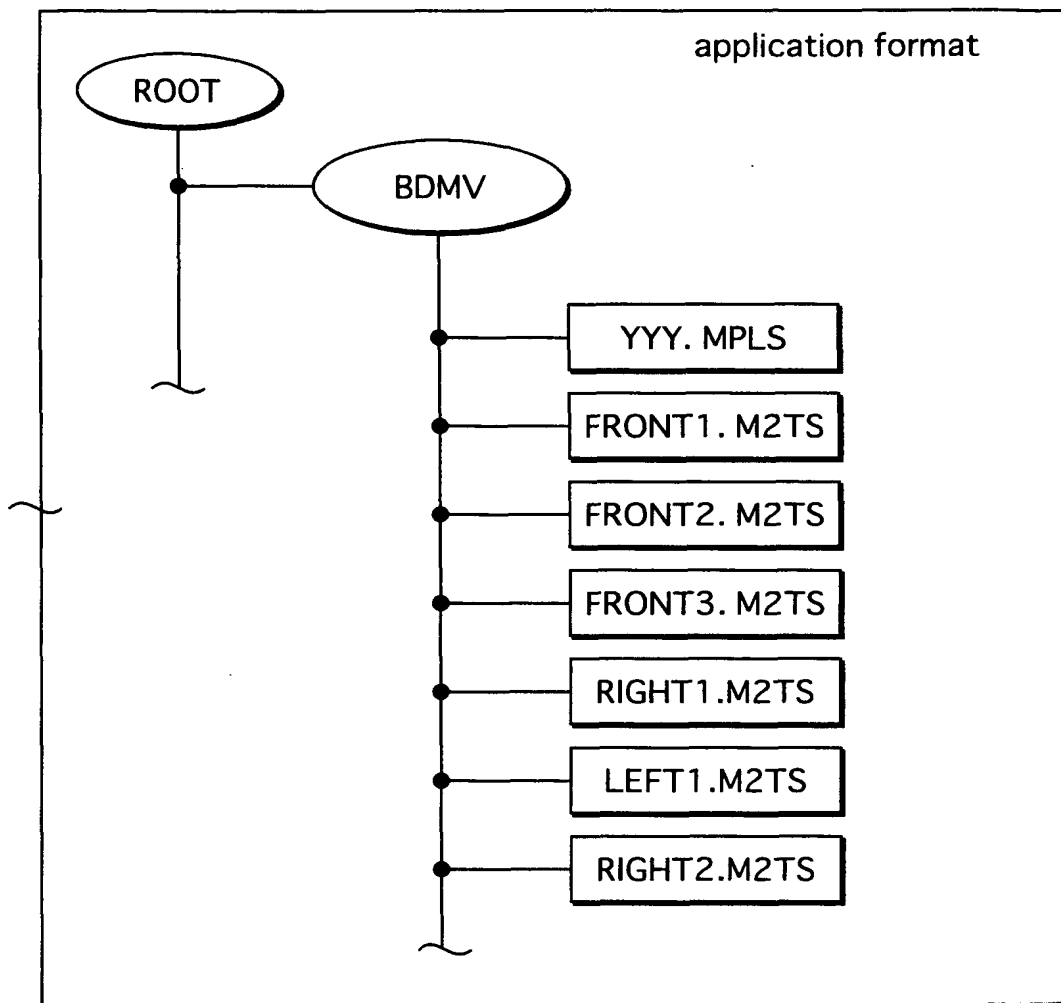




FIG.30A

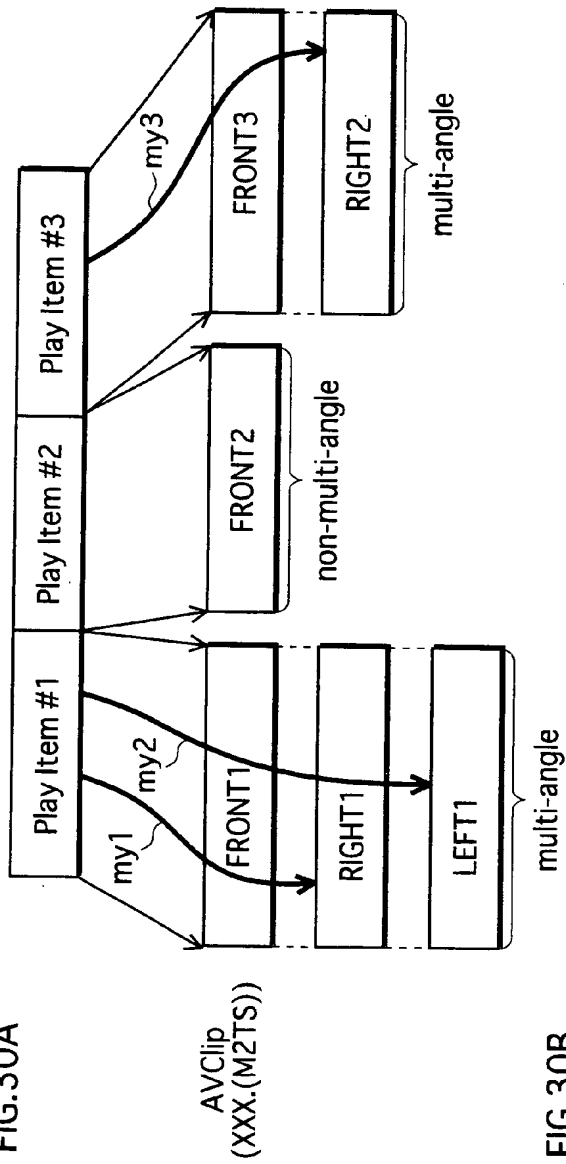


FIG.30B

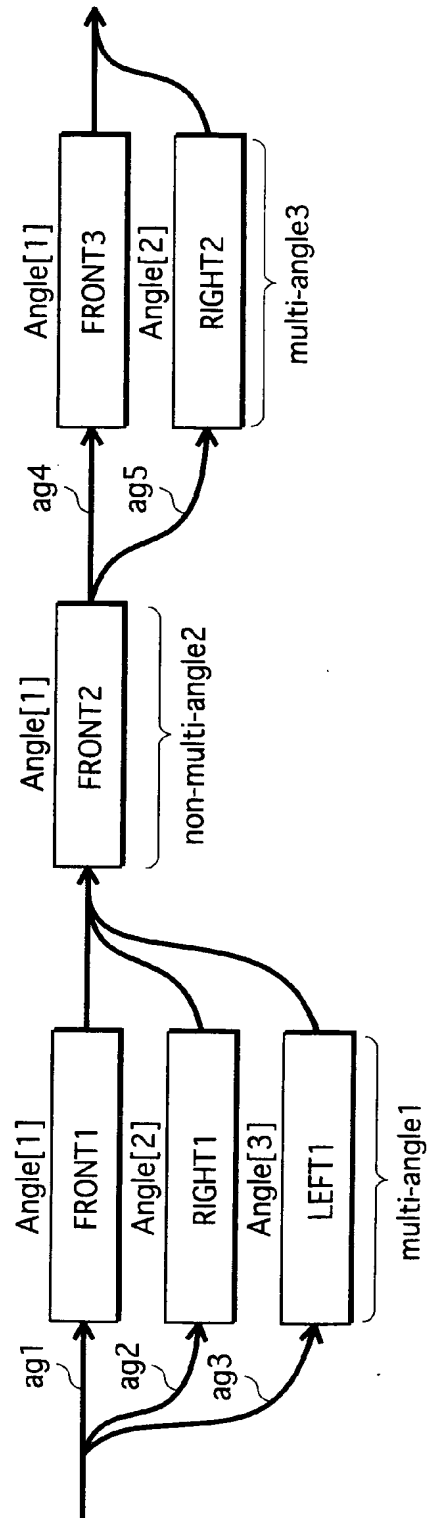


FIG.31

PSR 0	Interactive Graphics
PSR 1	Audio
PSR 2	Presentation graphics and Text subtitle
PSR 3	Angle
PSR 4	Title
PSR 5	Chapter
PSR 6	PlayList
PSR 7	PlayItem
PSR 8	Presentation Time
PSR 9	Timer
PSR 10	Selected Button
PSR 11	Menu Page
PSR 12	Selected Style
PSR 13	Parental

1 to 9 : Angle number

FIG.32A Status and Transition for PSR3

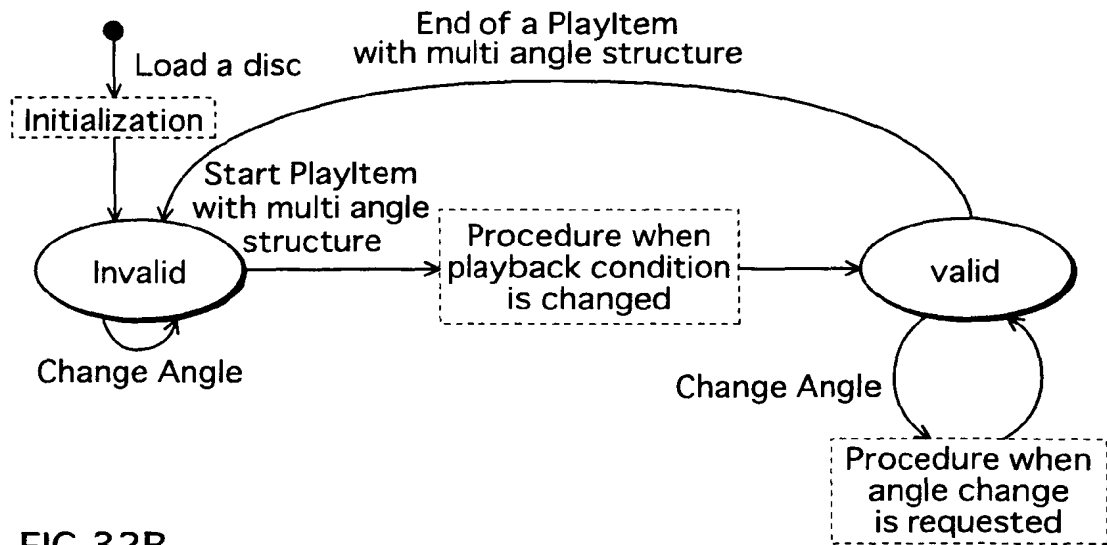


FIG.32B

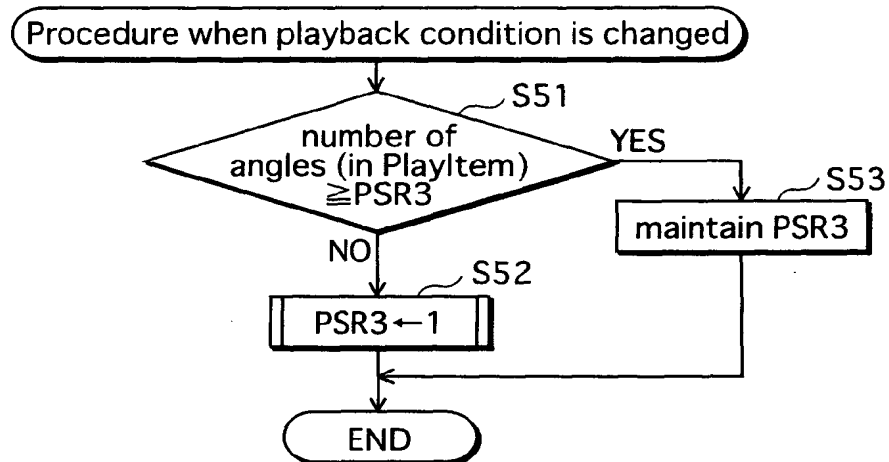


FIG.32C

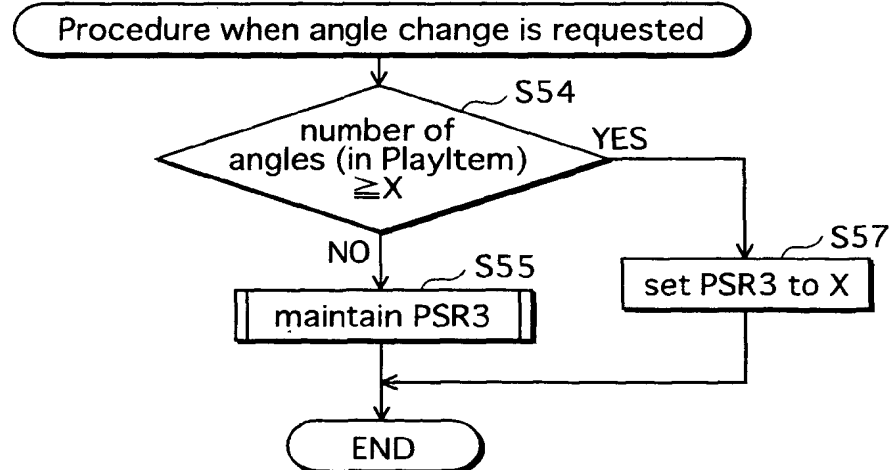
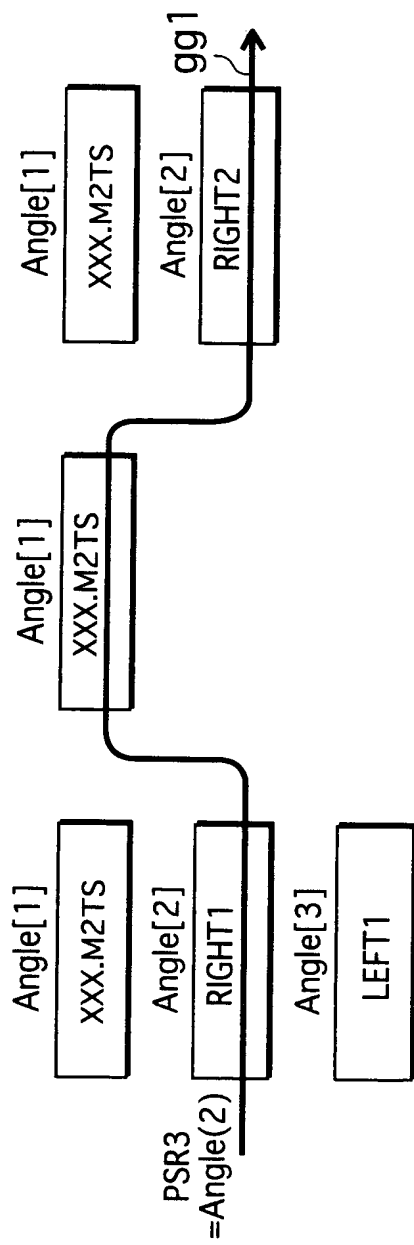


FIG. 33A



**FIG. 33B**

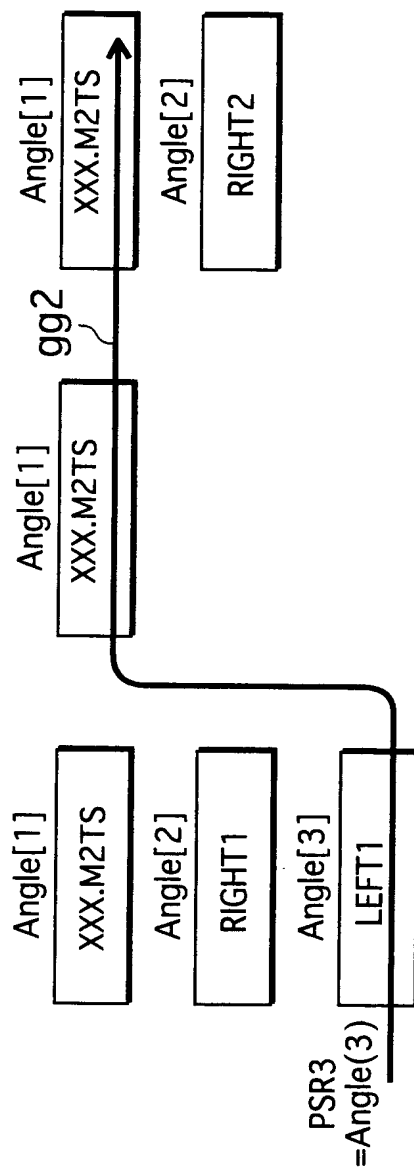


FIG.34

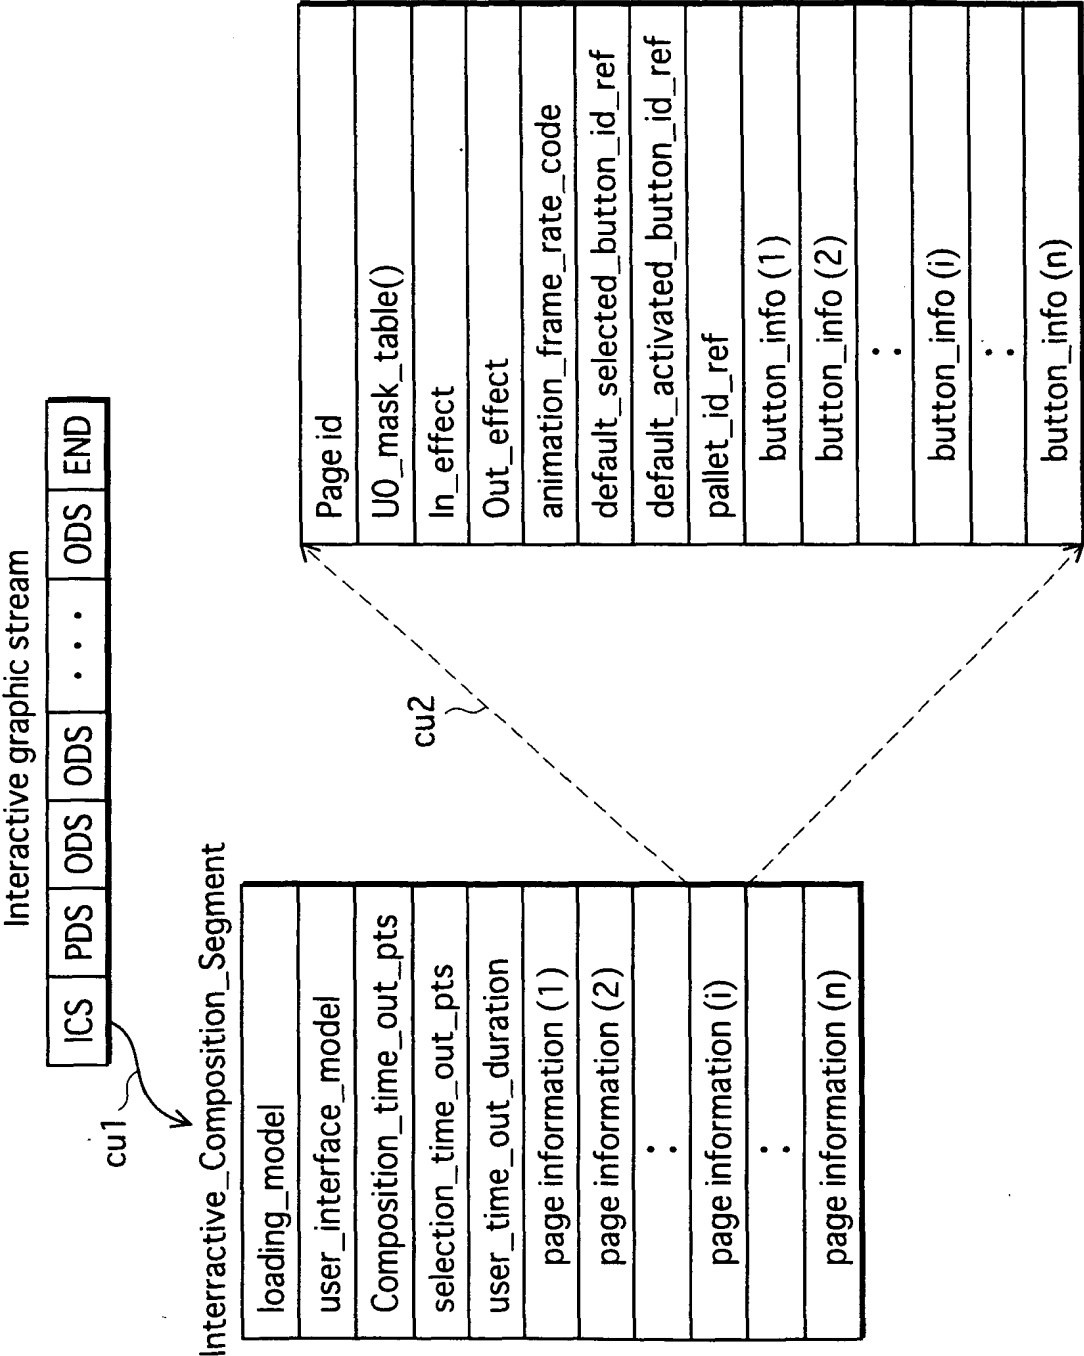


FIG.35

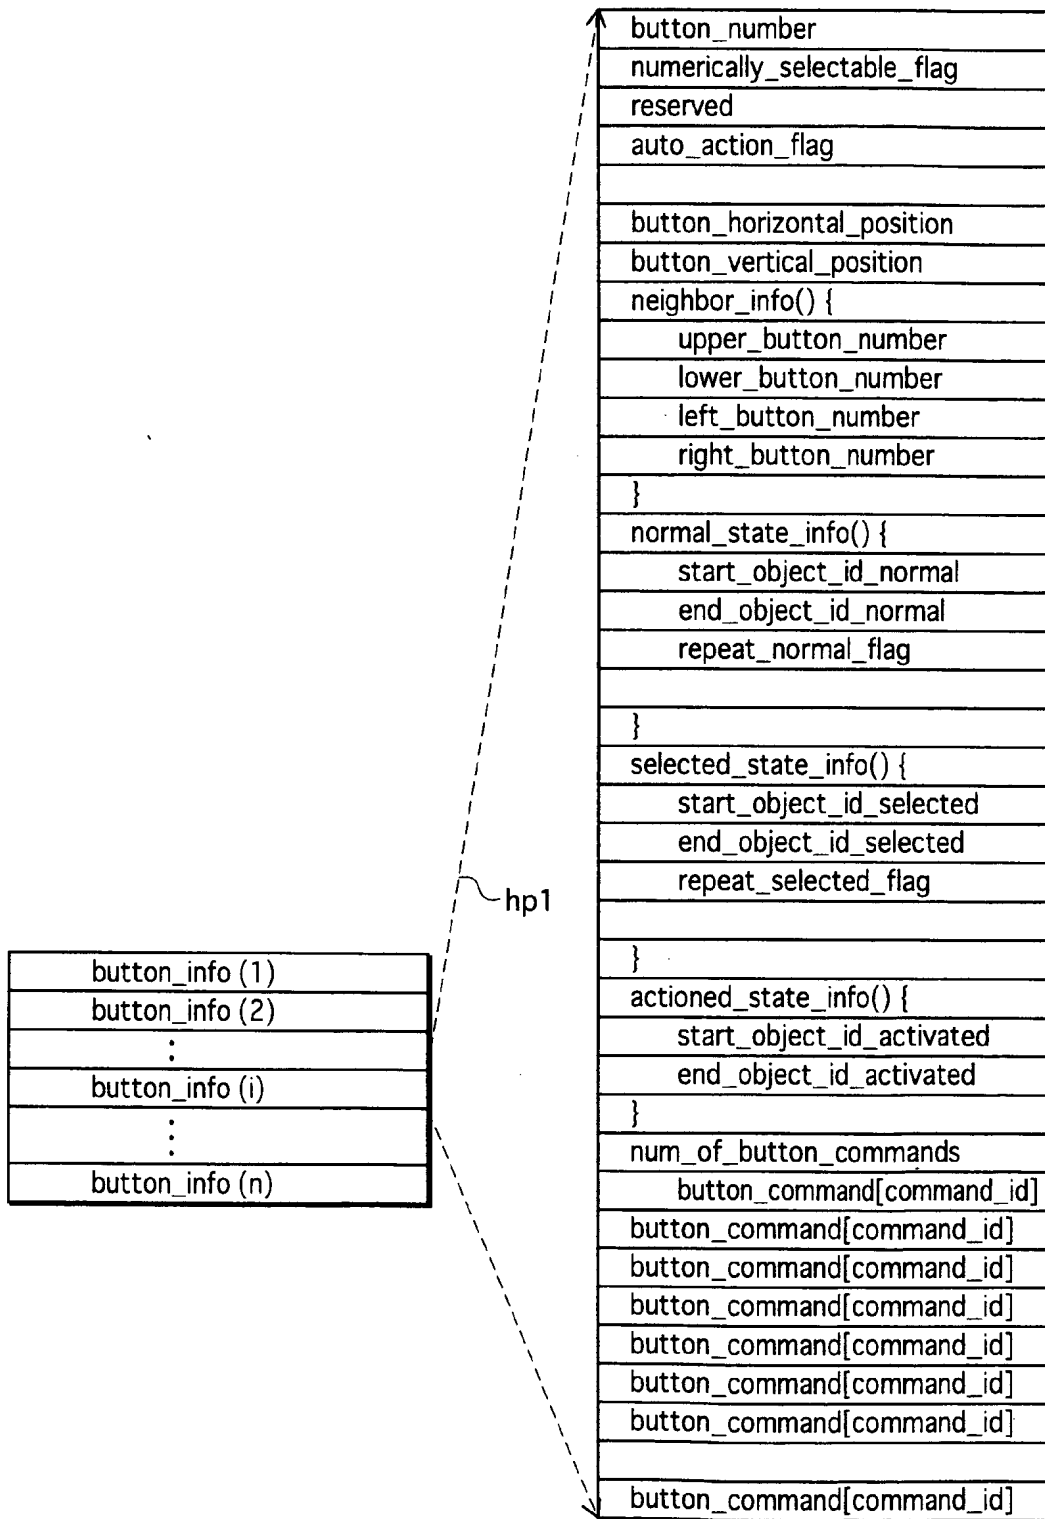
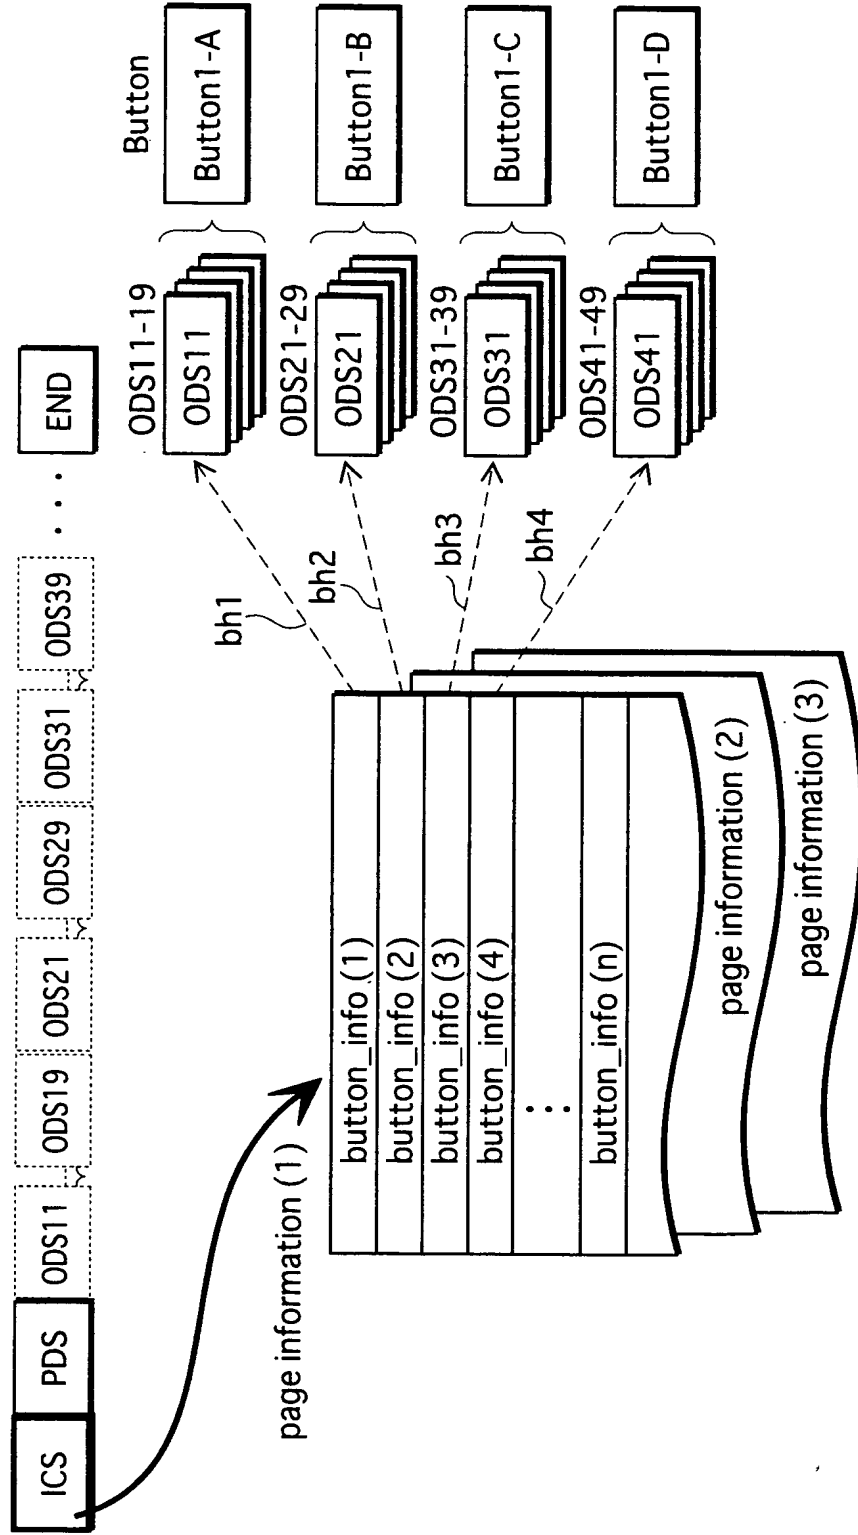


FIG.36



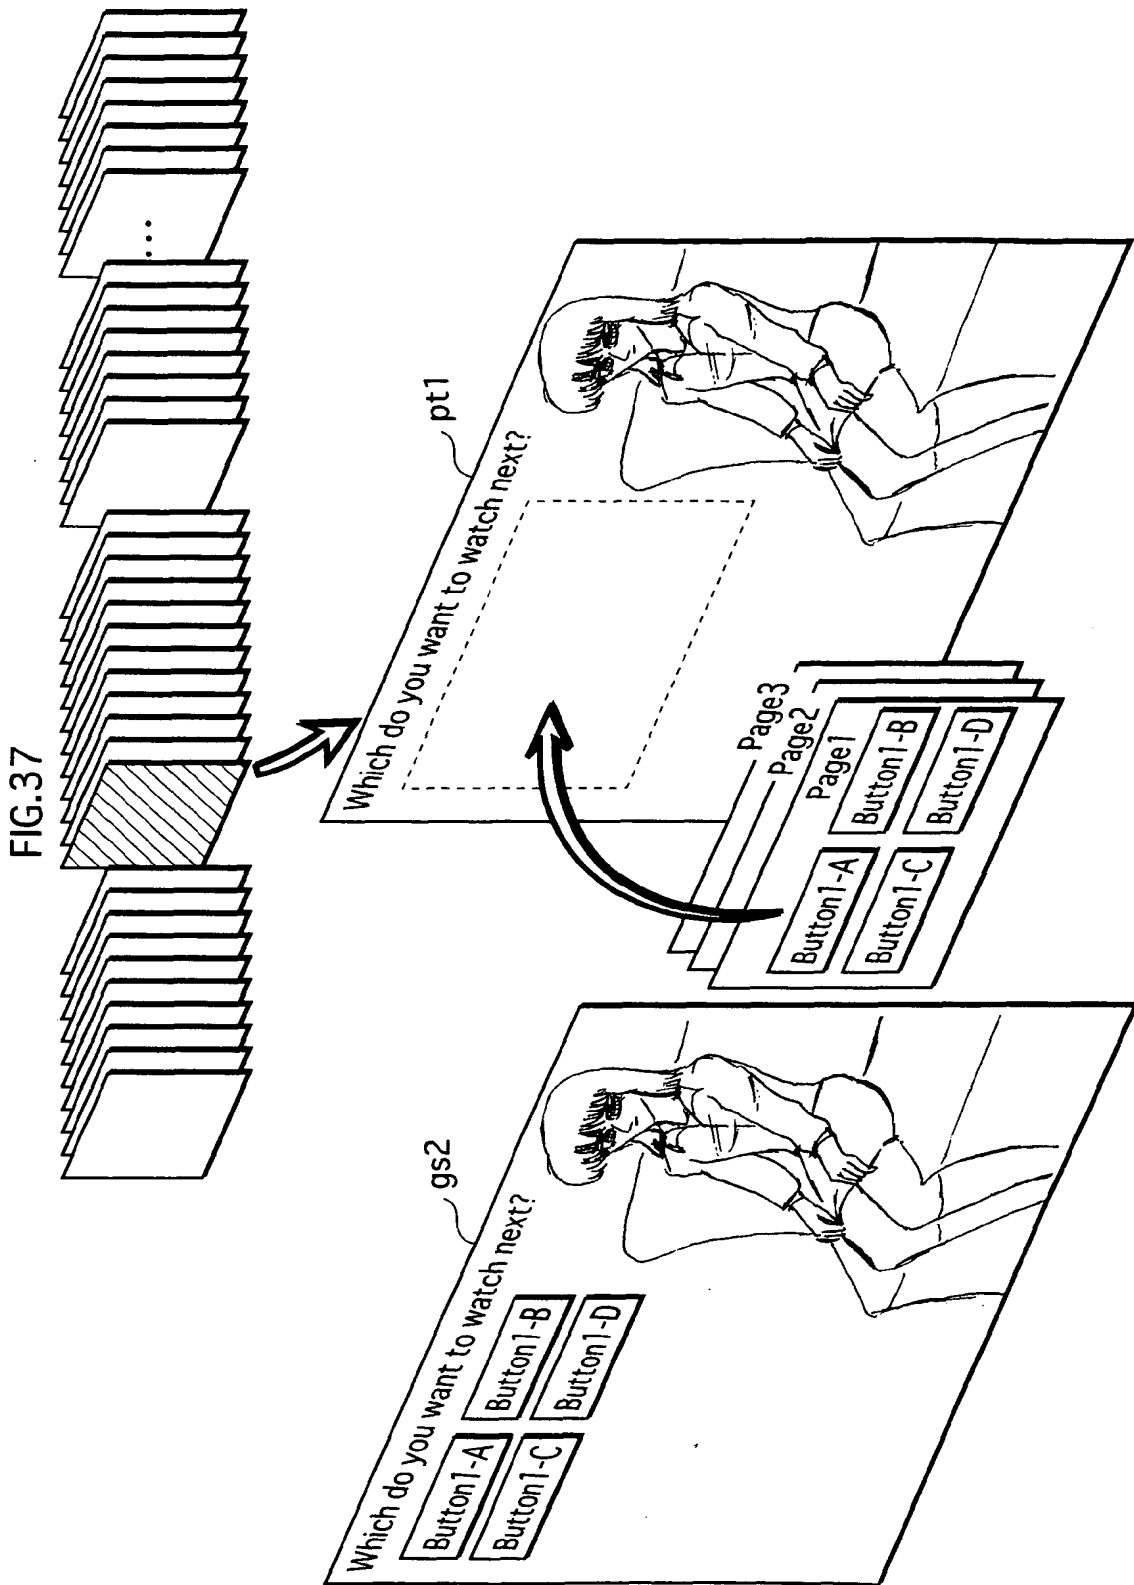




FIG.38

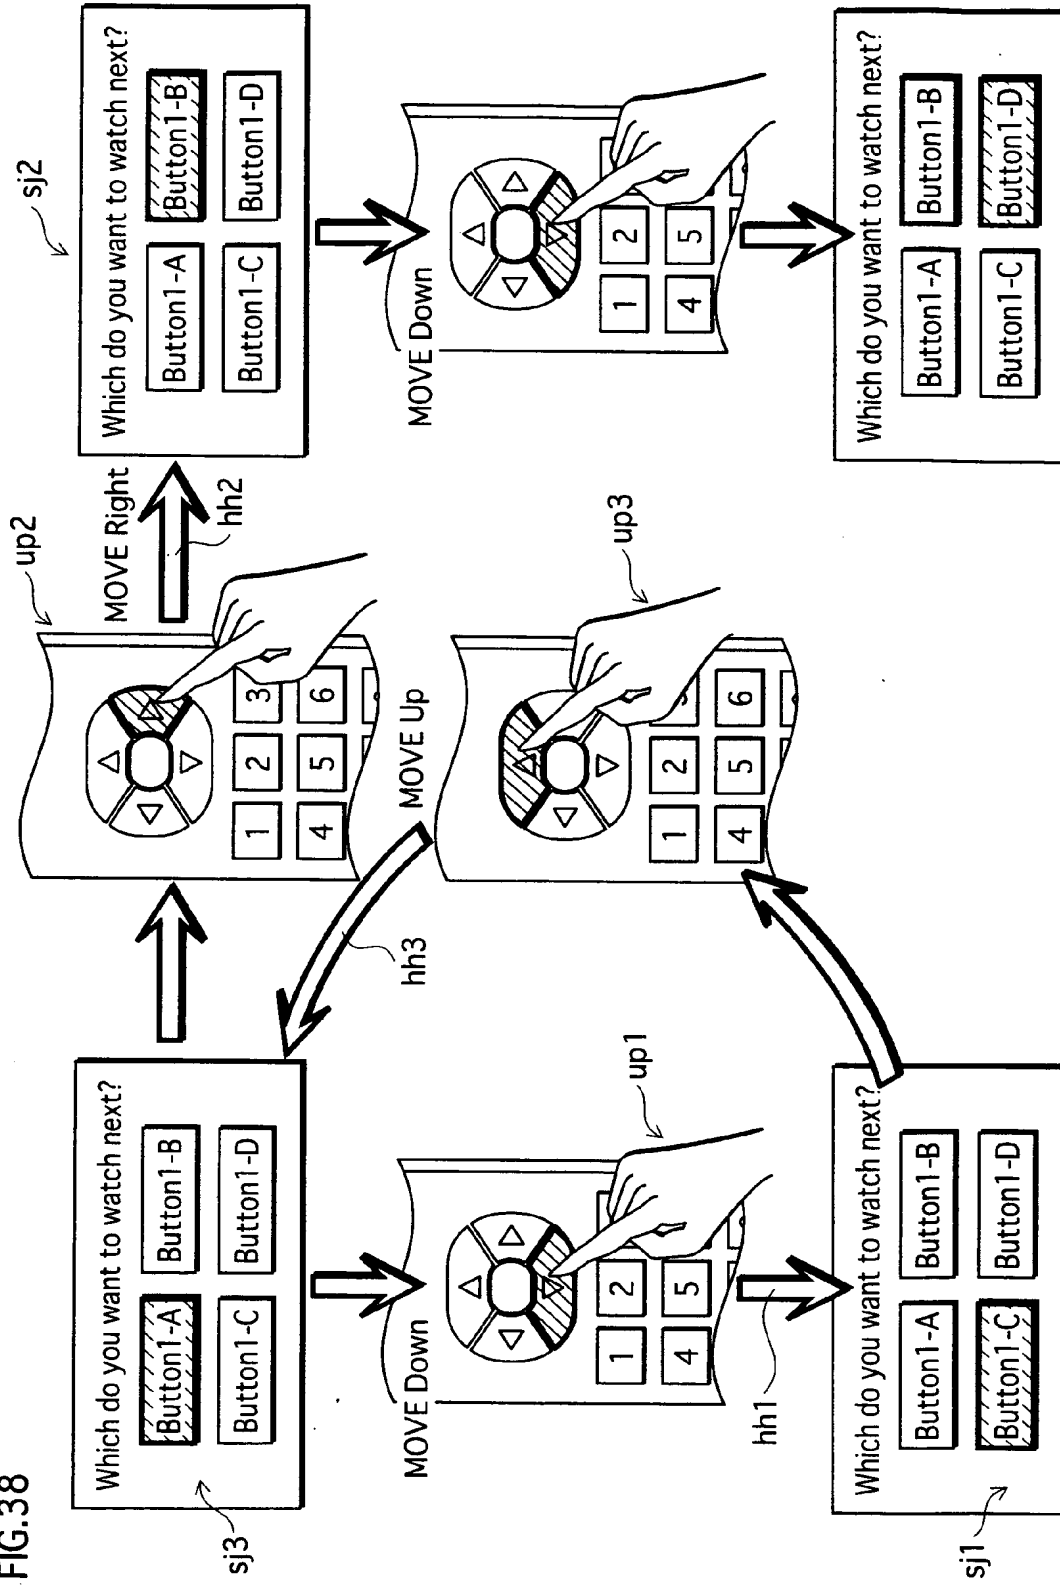


FIG.39

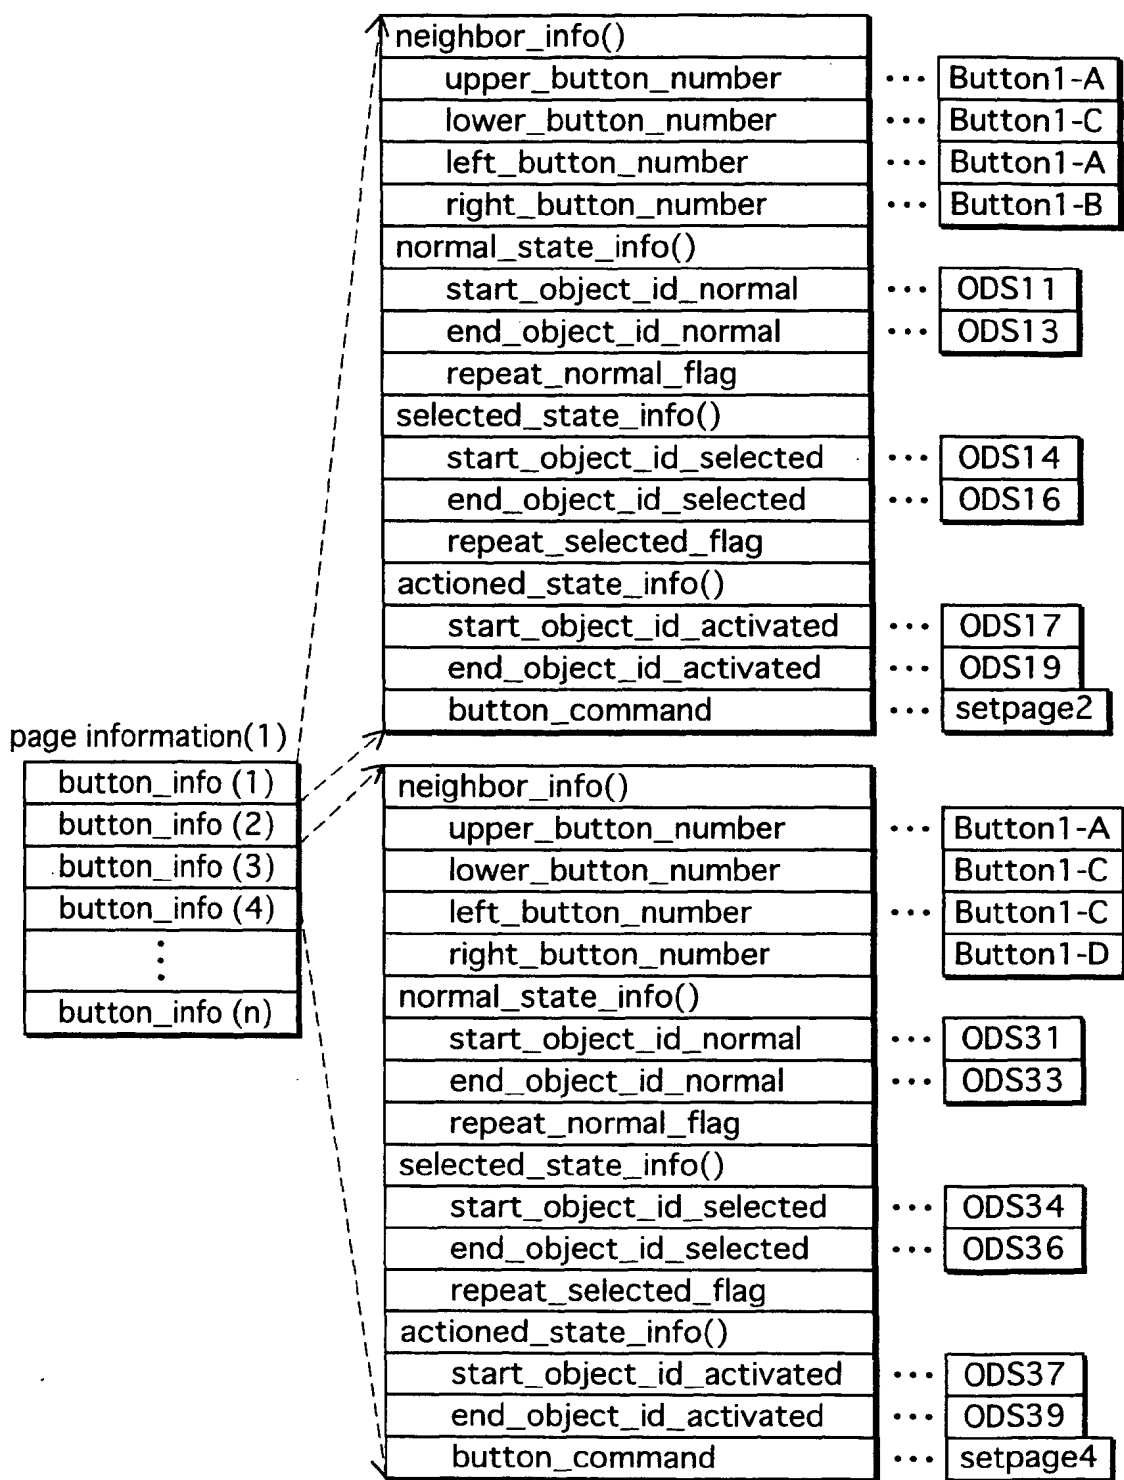


FIG. 40

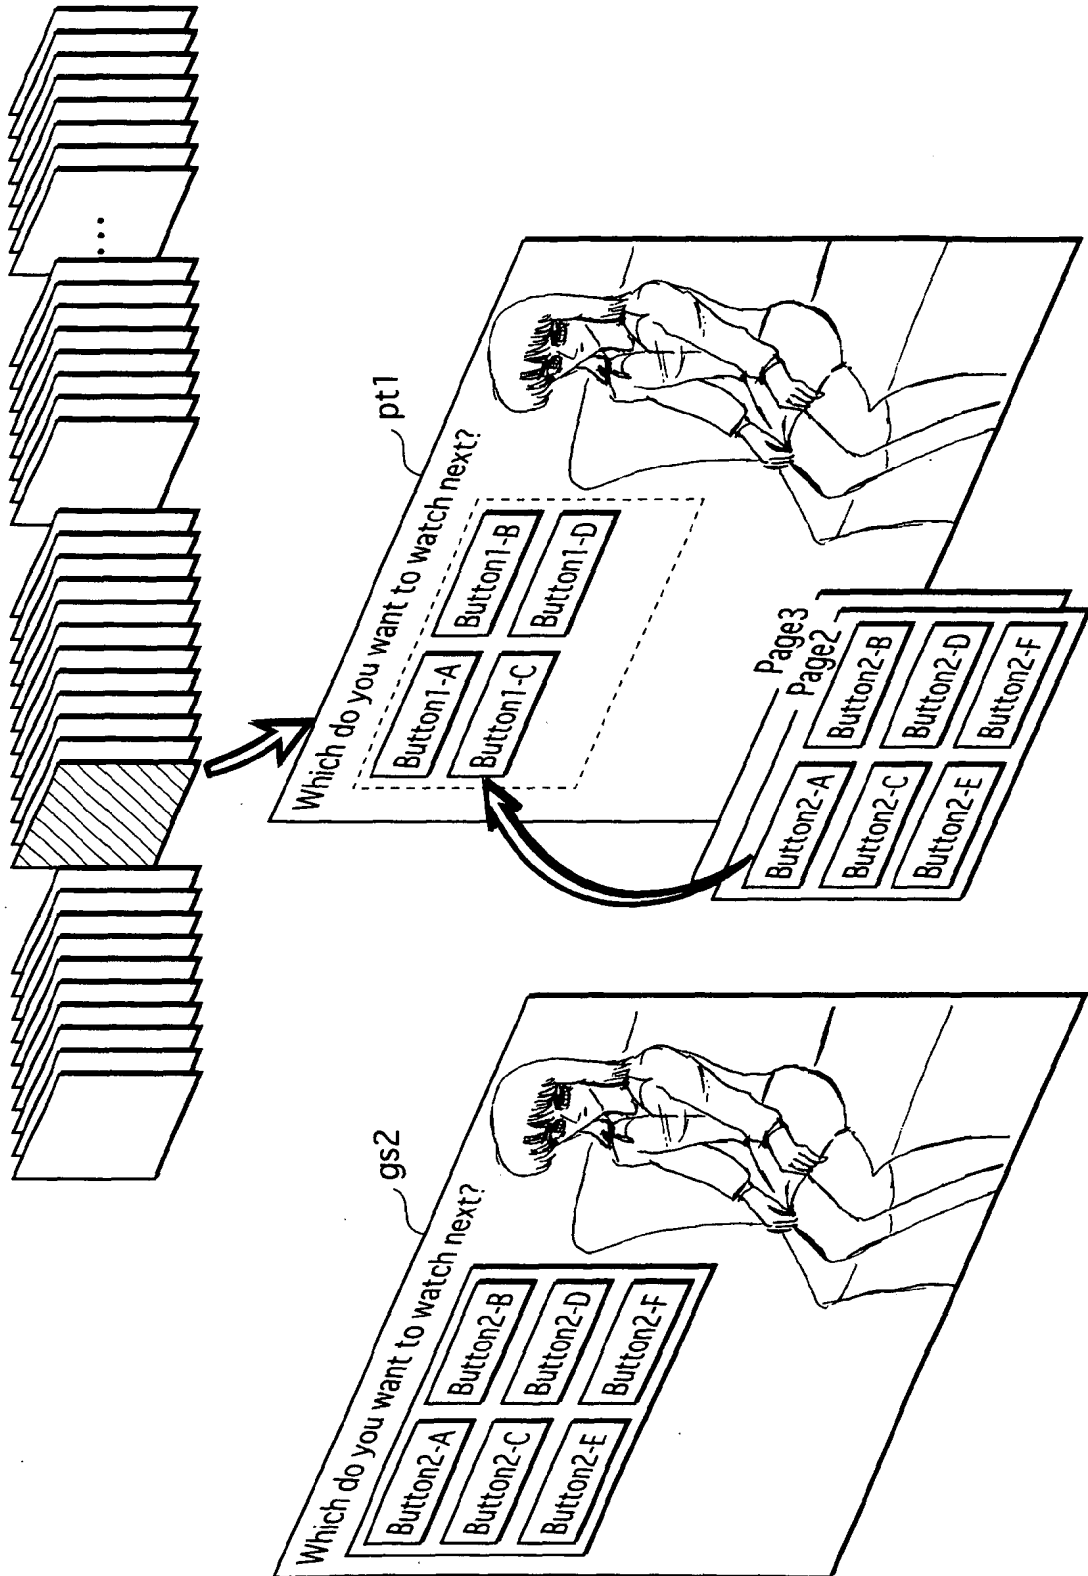


FIG.41

PSR 0	Interactive Graphics	1 to 32 : Interactive Graphics Stream number
PSR 1	Audio	
PSR 2	Presentation graphics and Text subtitle	
PSR 3	Angle	
PSR 4	Title	
PSR 5	Chapter	
PSR 6	PlayList	
PSR 7	PlayItem	
PSR 8	Presentation Time	
PSR 9	Timer	
PSR 10	Selected Button	
PSR 11	Menu Page	
PSR 12	Selected Style	
PSR 13	Parental	

0x0000 to 0x0FEF : Selected Button id 0xFFFF : Button id is invalid	
0x00 to 0xFE : Page id	

FIG.42A

## Status and Transition for PSR0

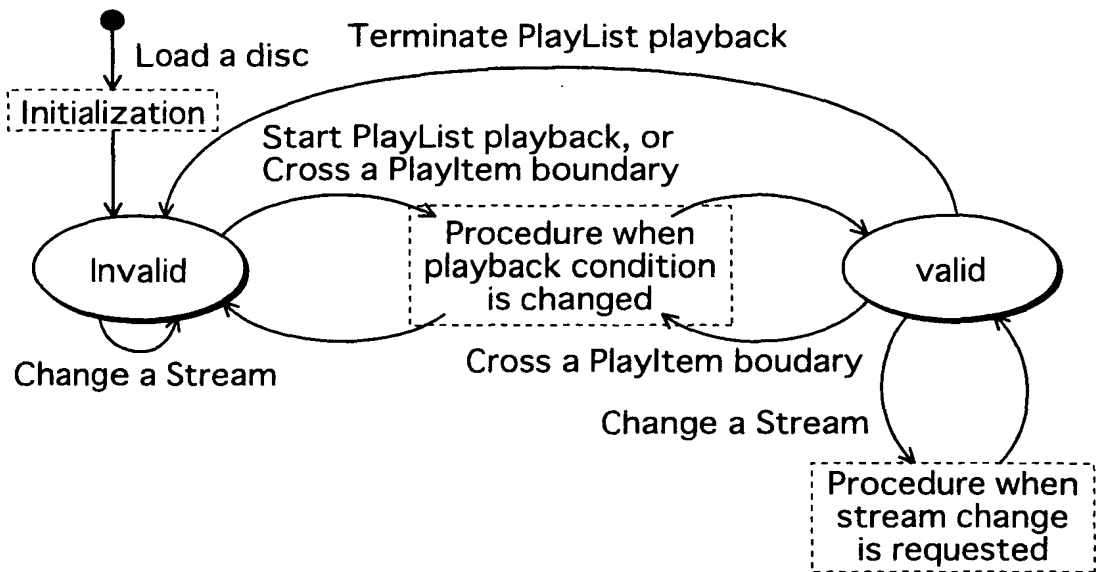


FIG.42B

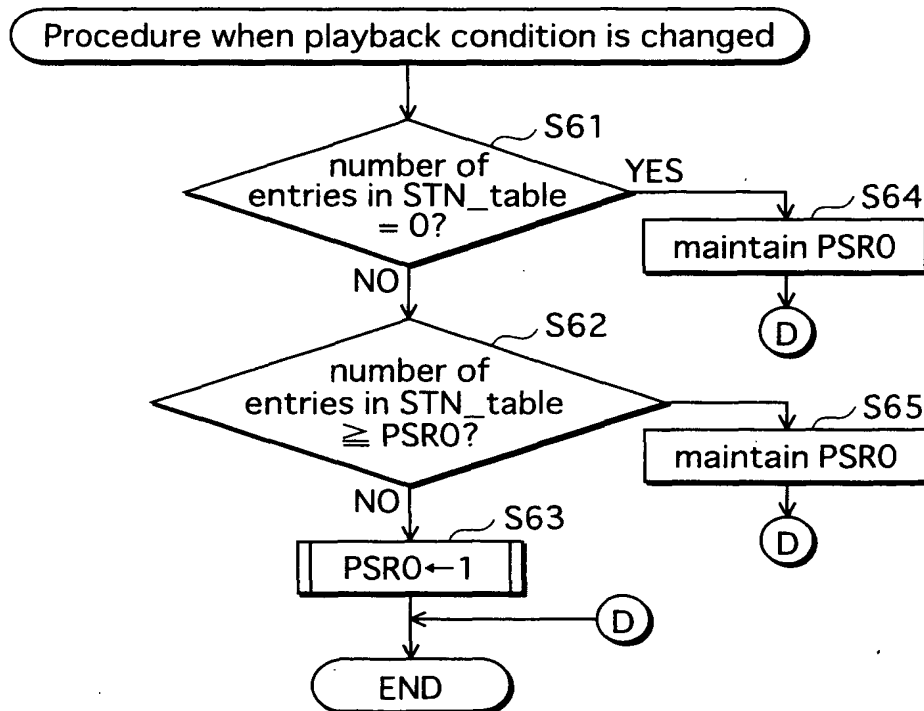


FIG.43

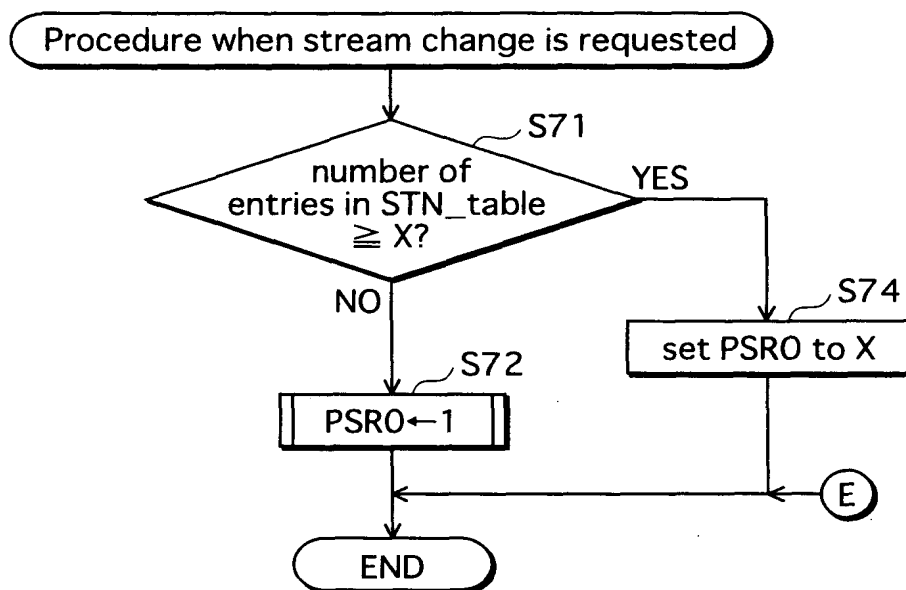




FIG.45

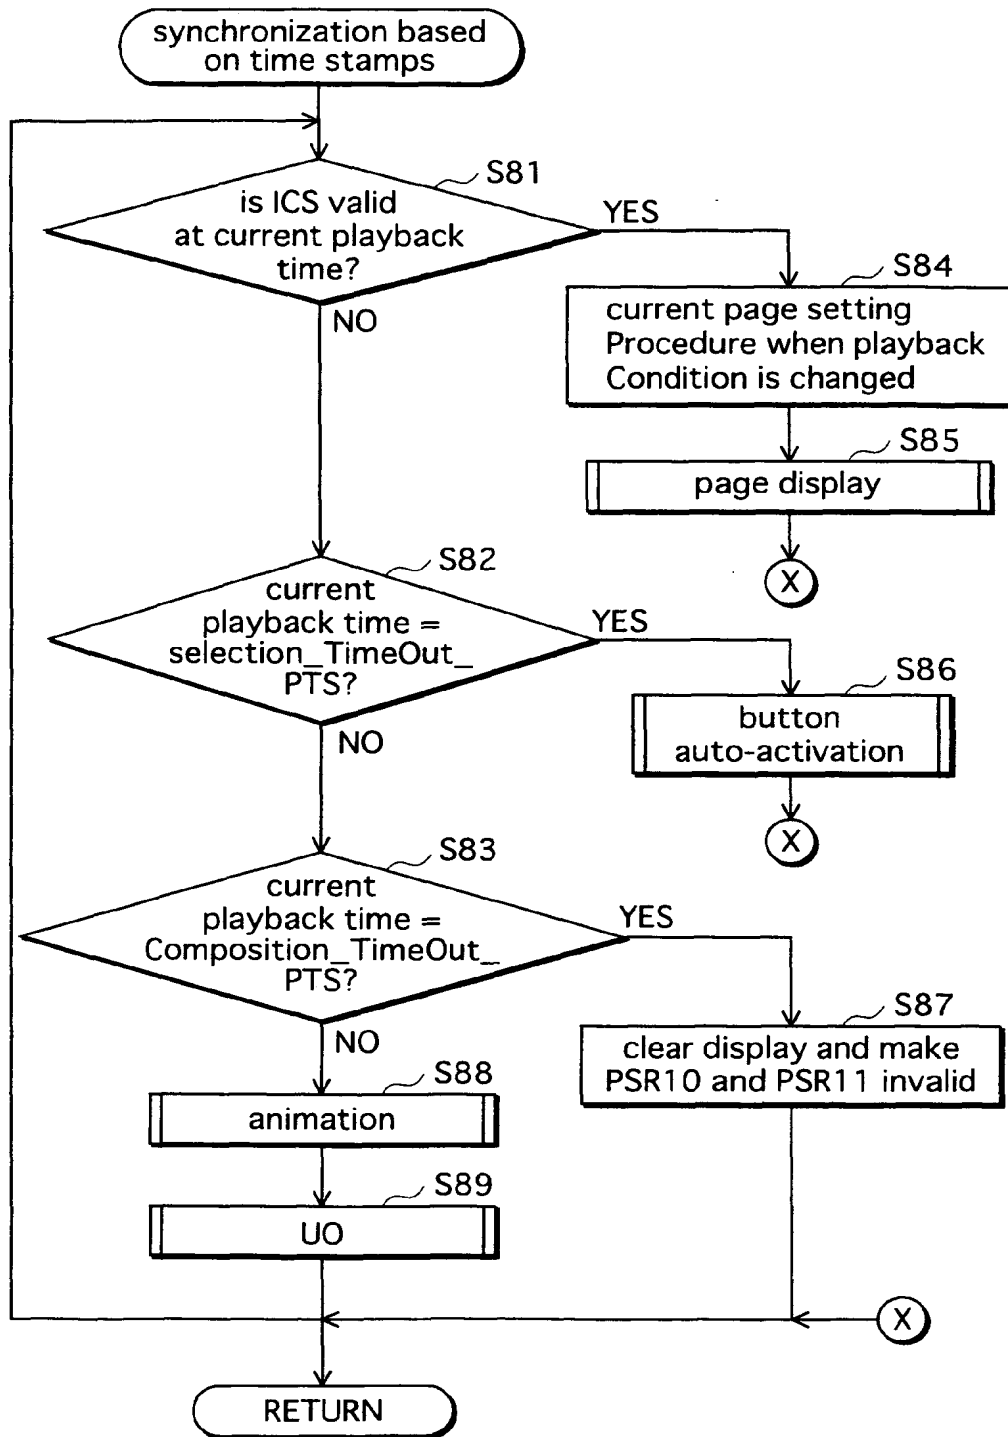




FIG.46

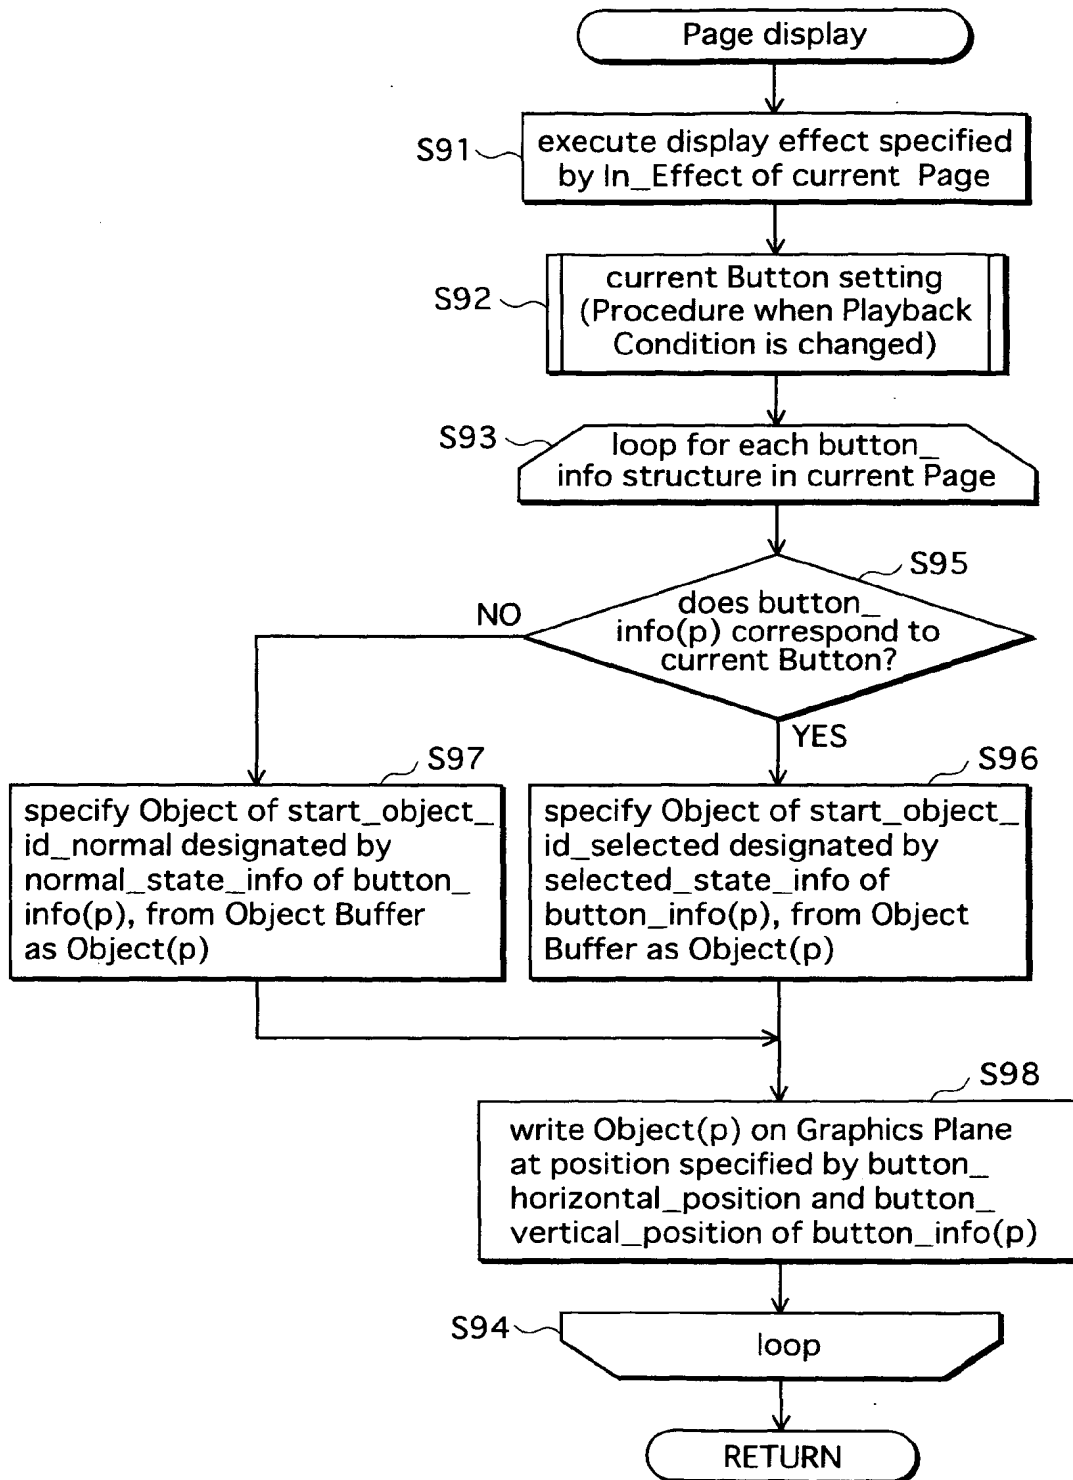


FIG.47

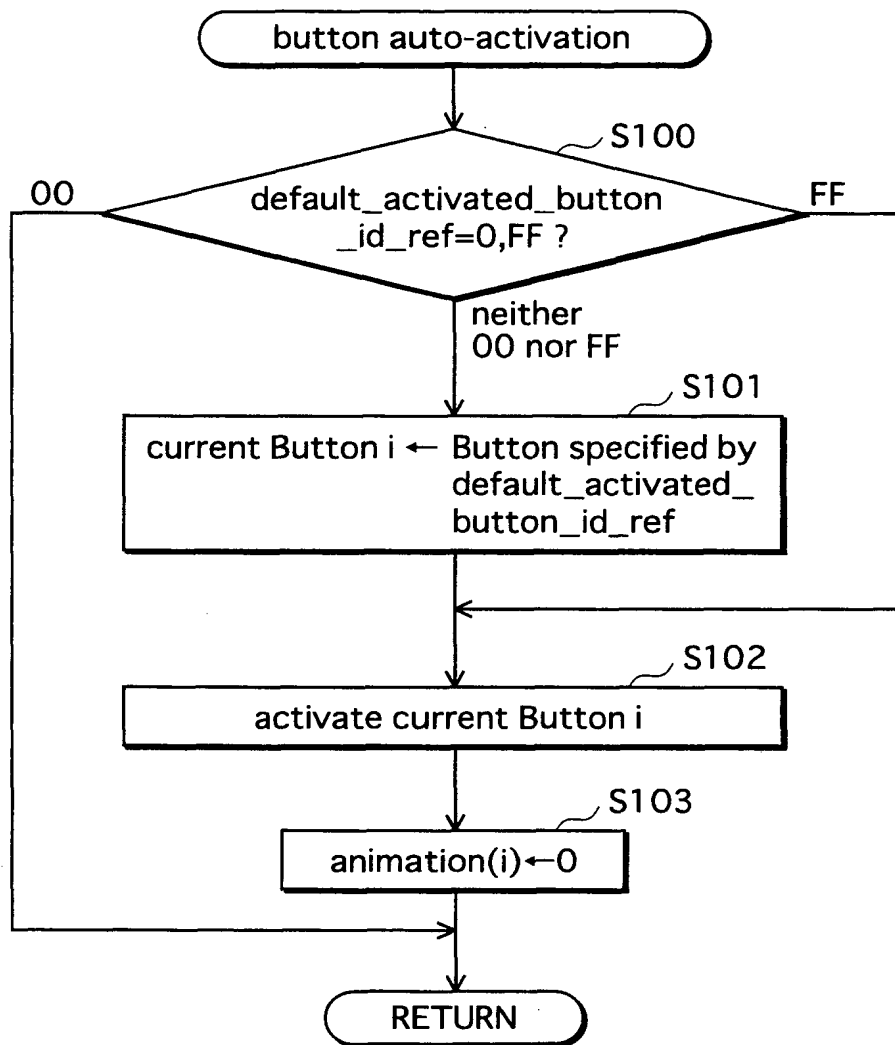


FIG.48

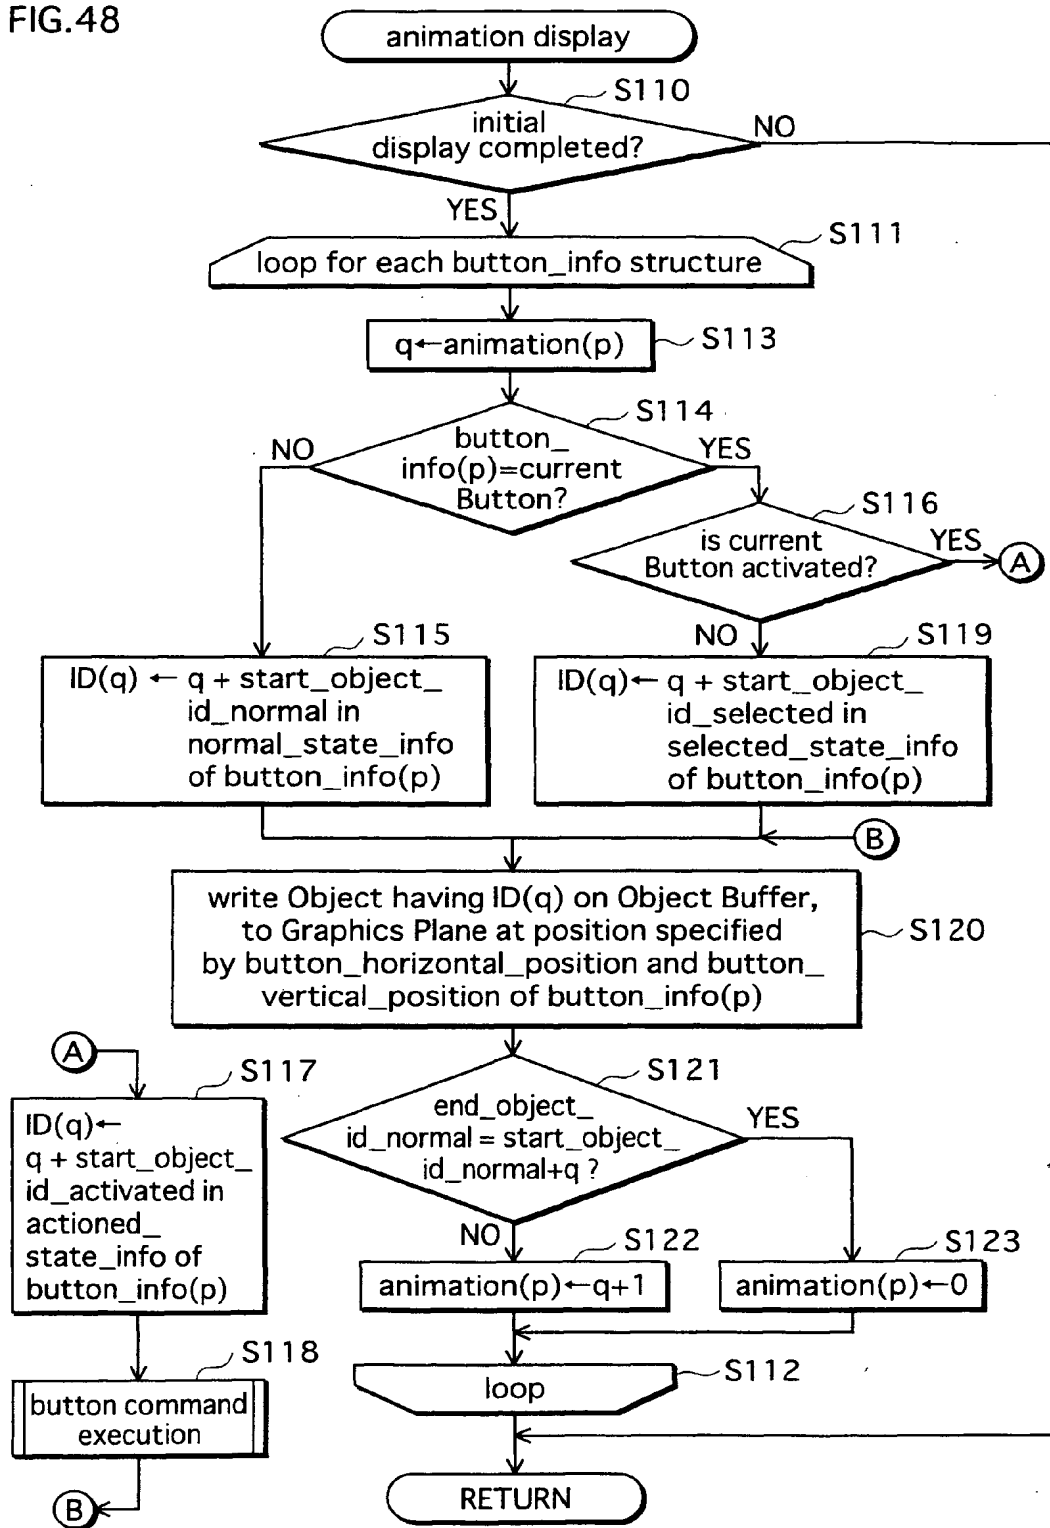


FIG.49

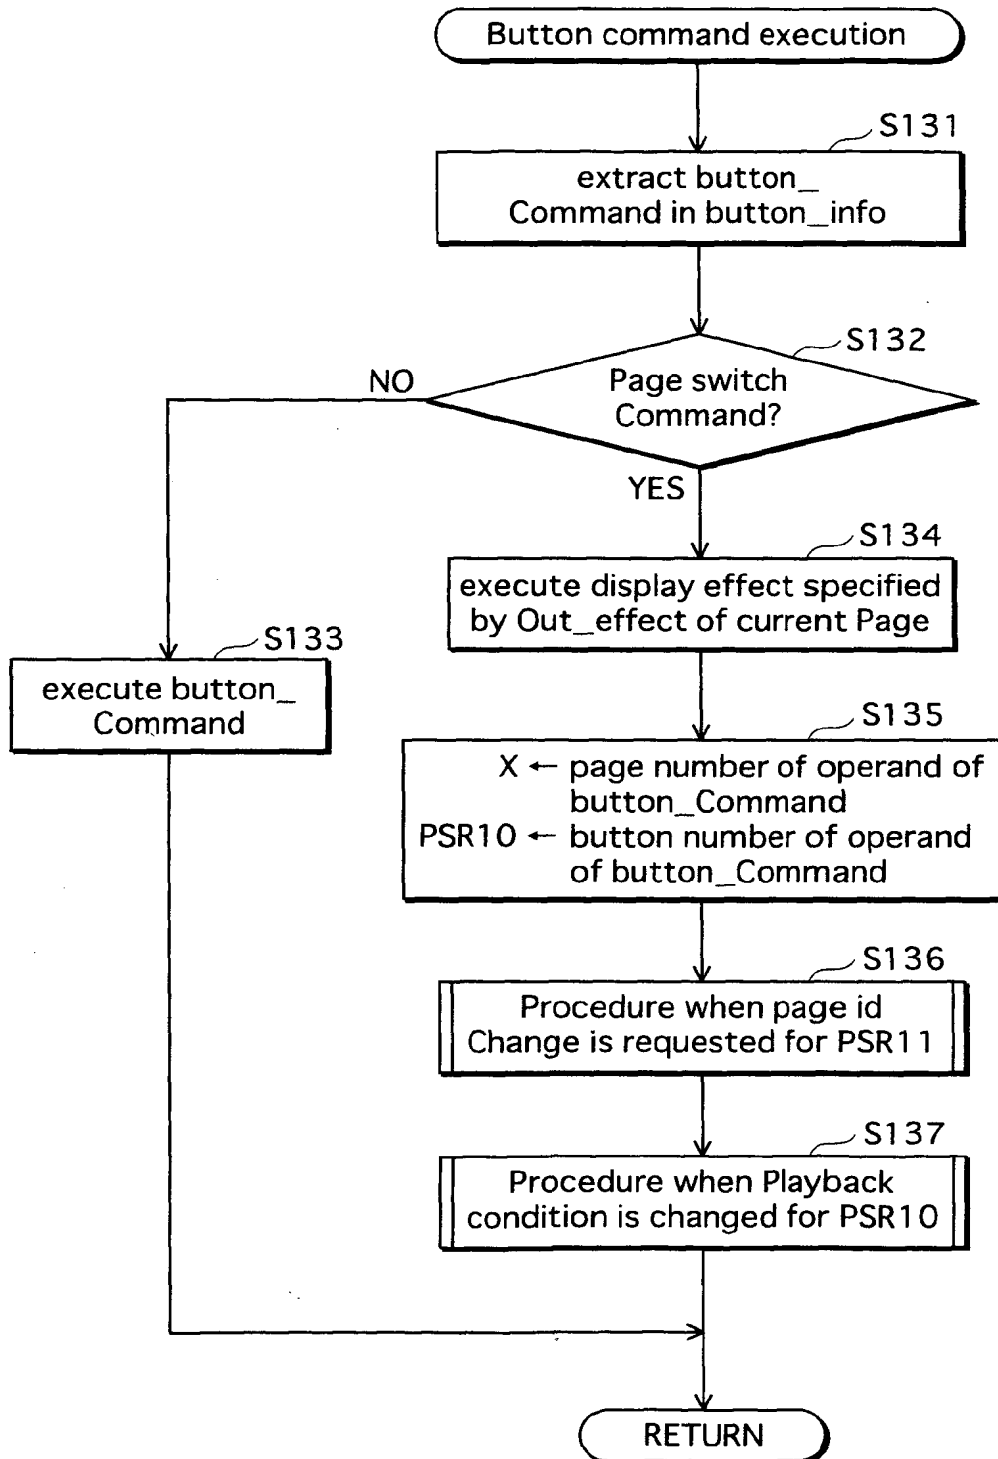


FIG. 50

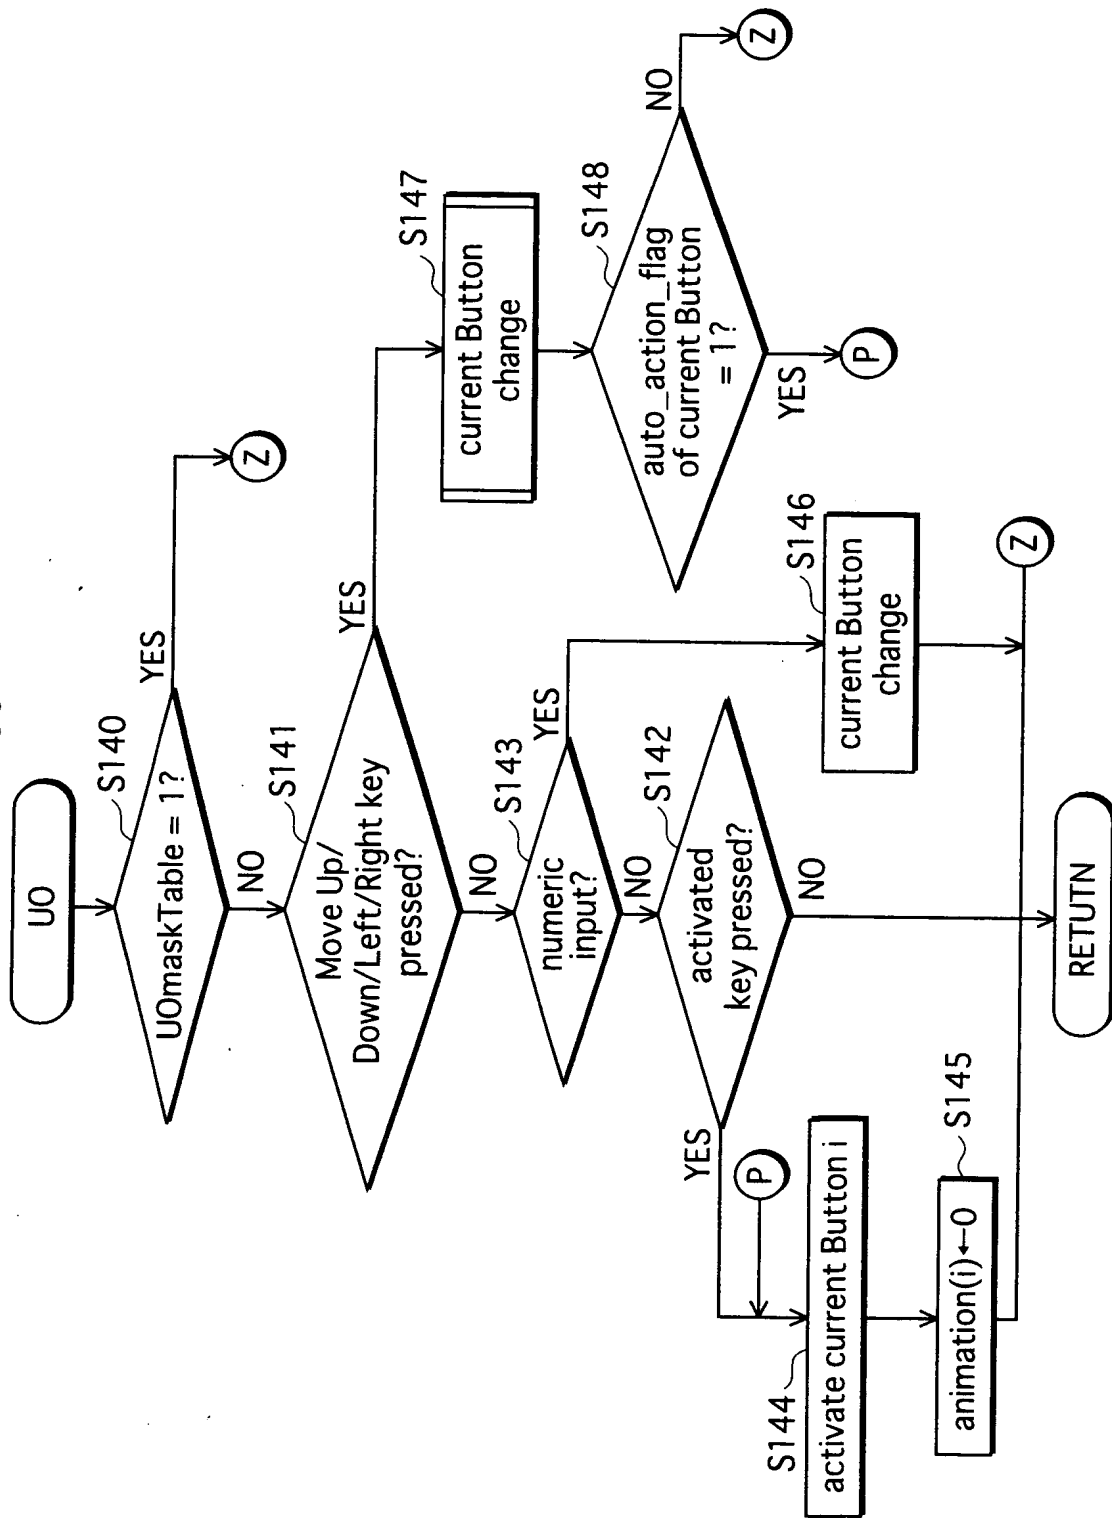
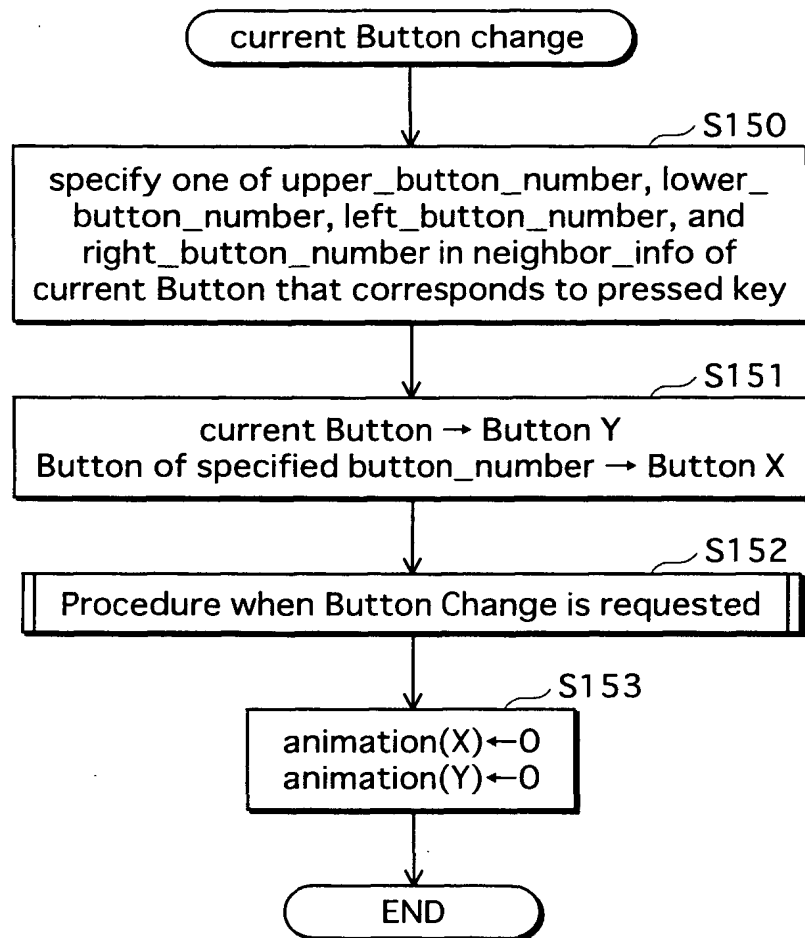


FIG.51



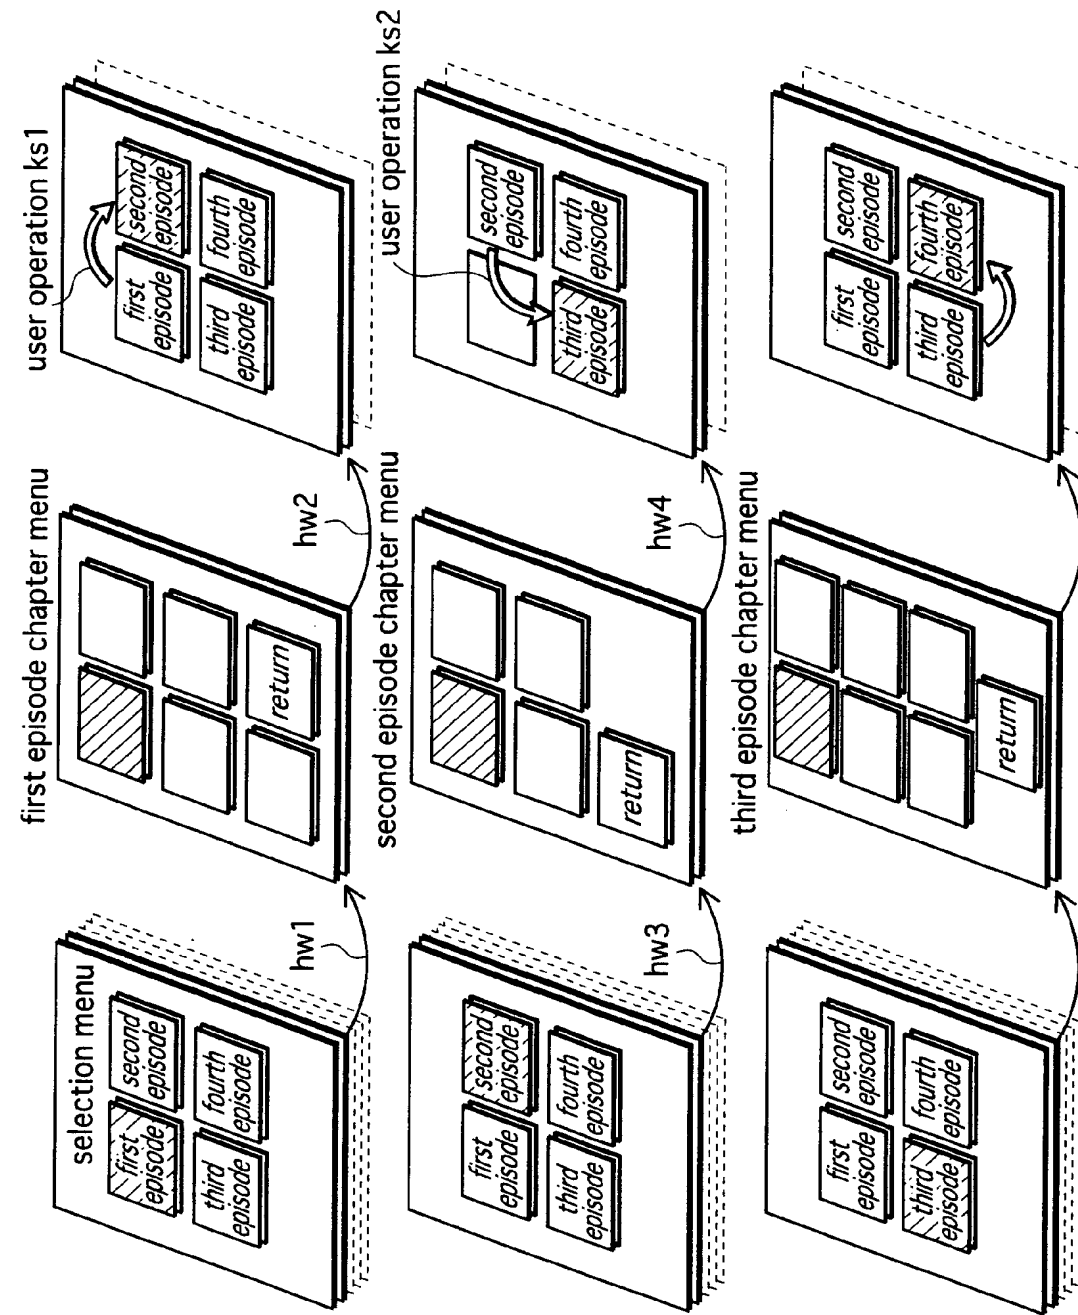


FIG. 52

FIG.53

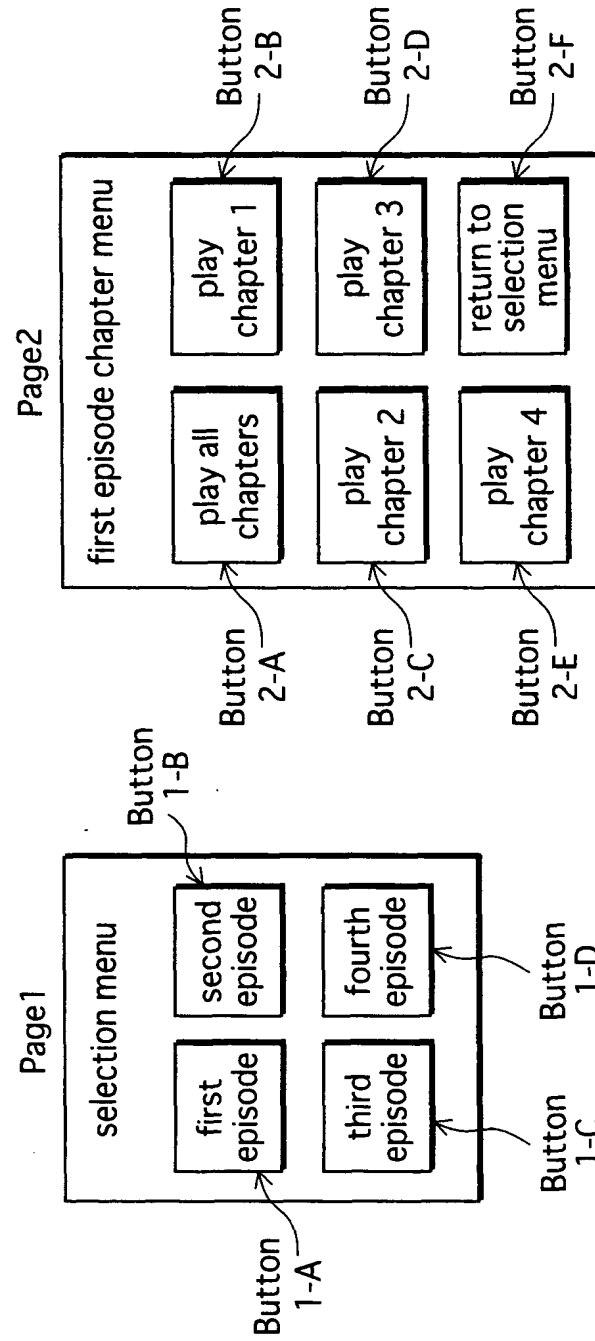
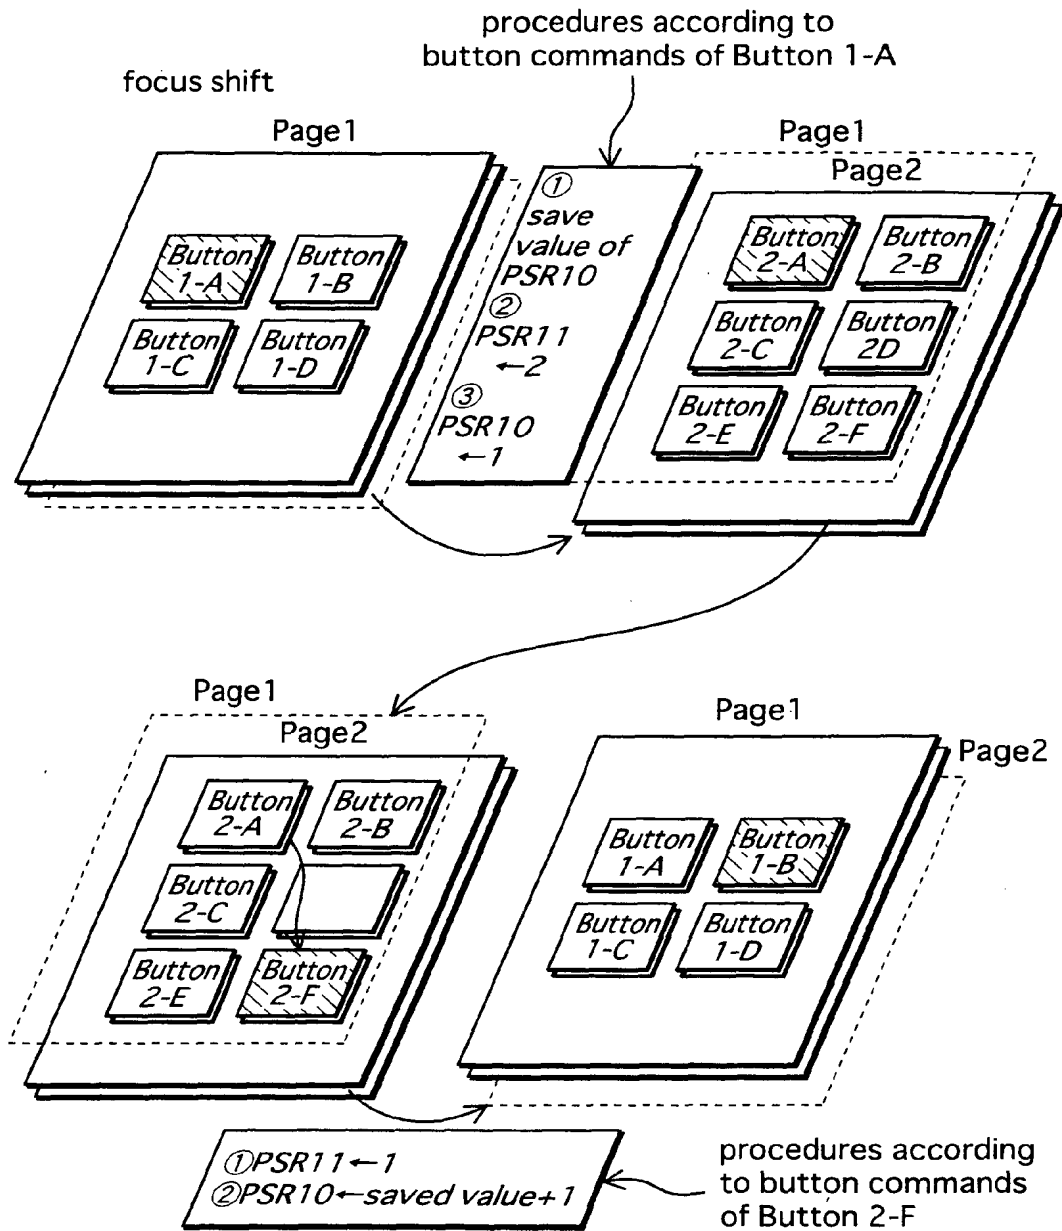




FIG.54



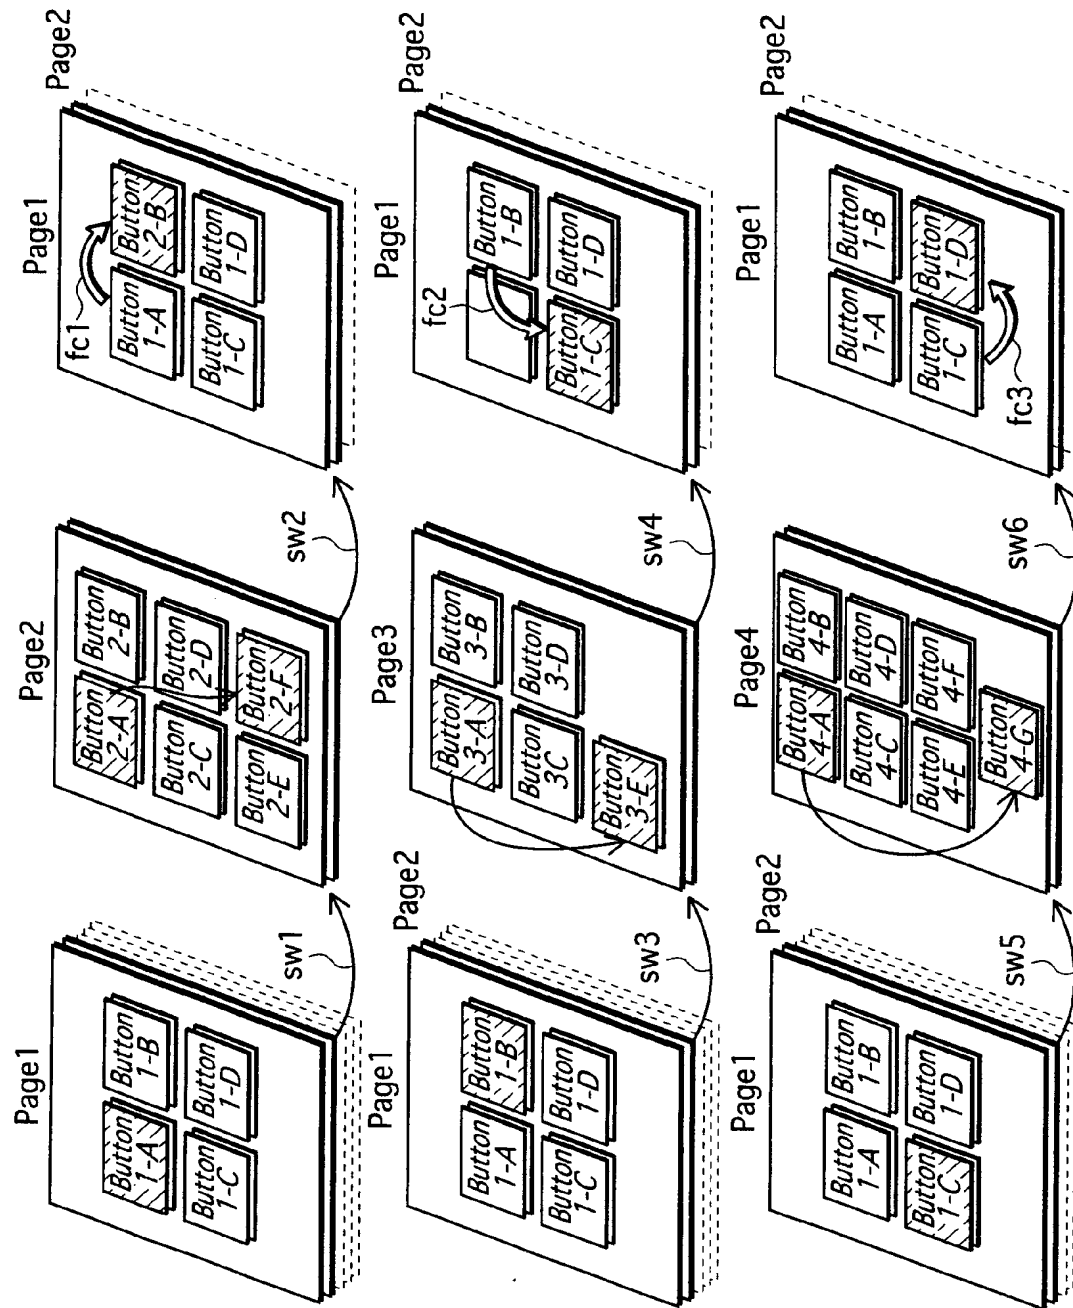


FIG. 55

FIG.56

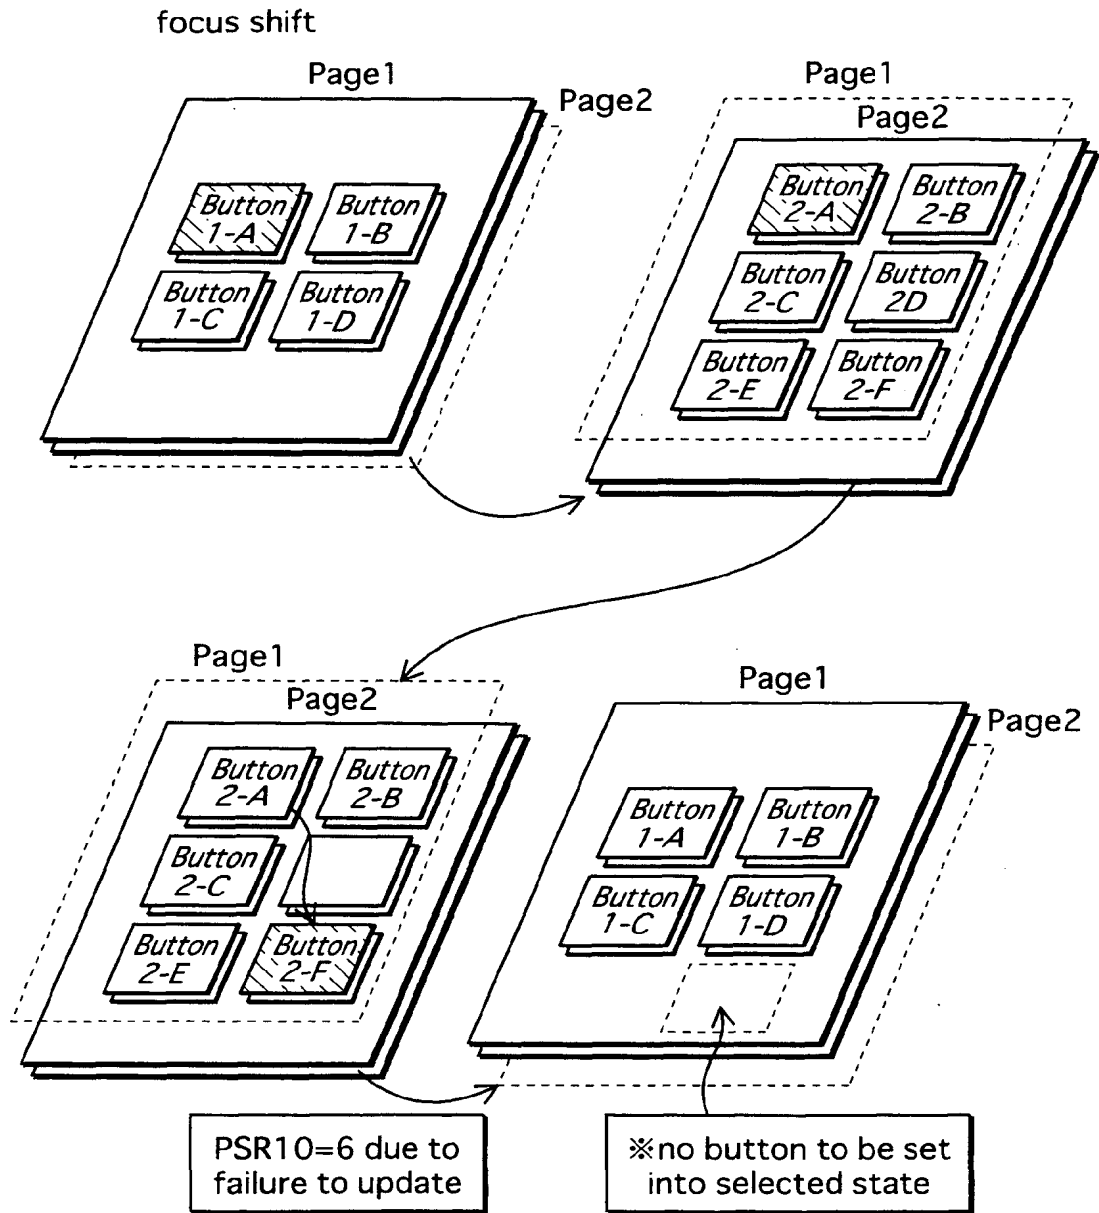


FIG.57A

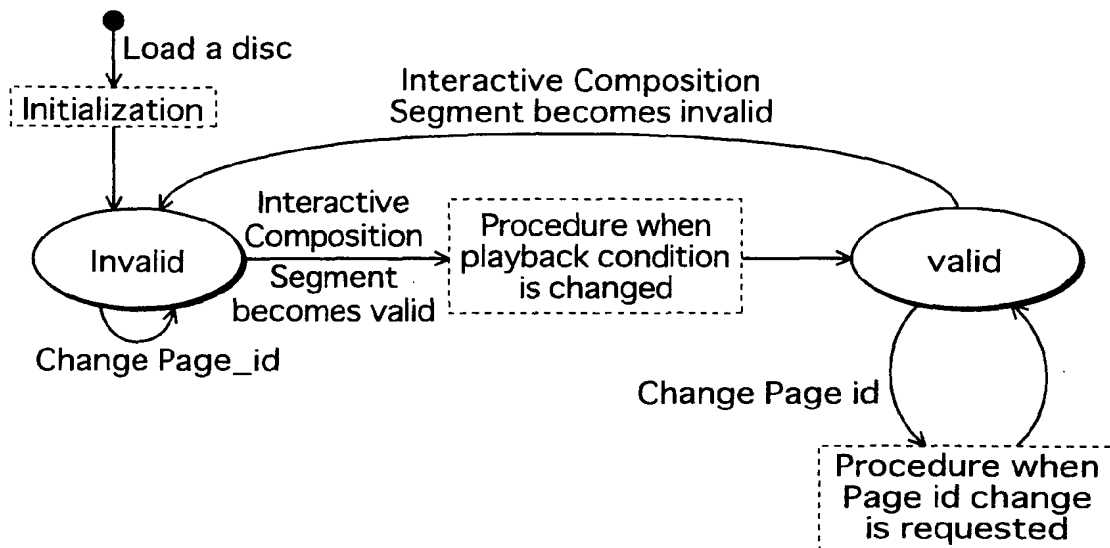


FIG.57B

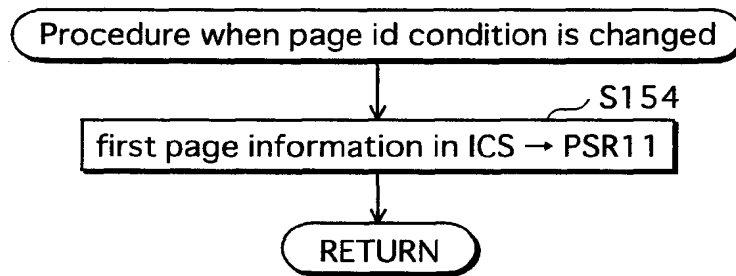


FIG.57C

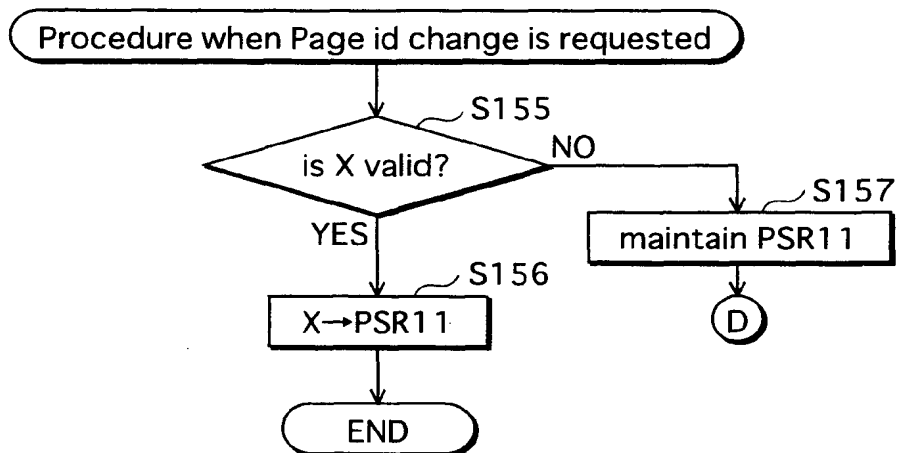


FIG.58A

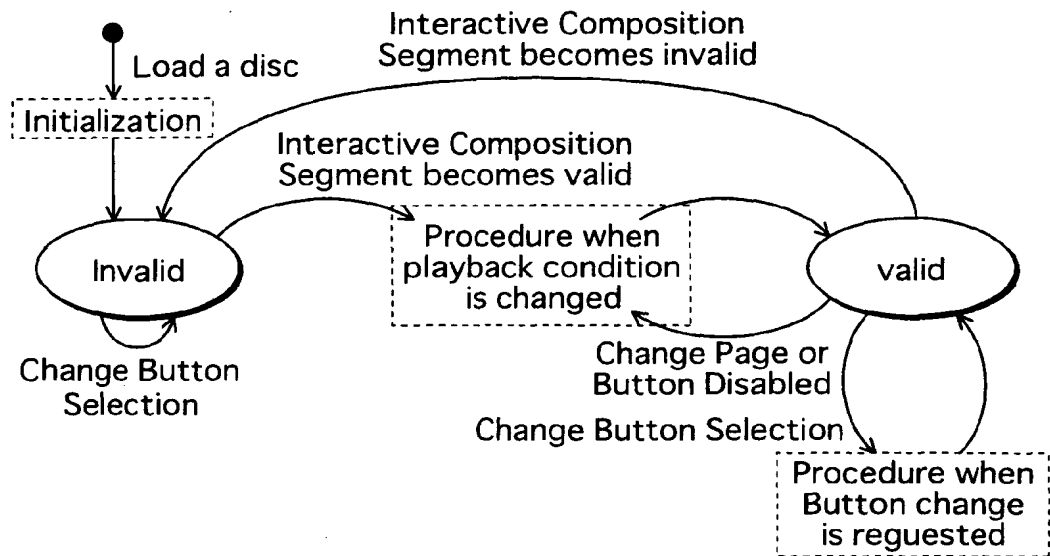


FIG.58B


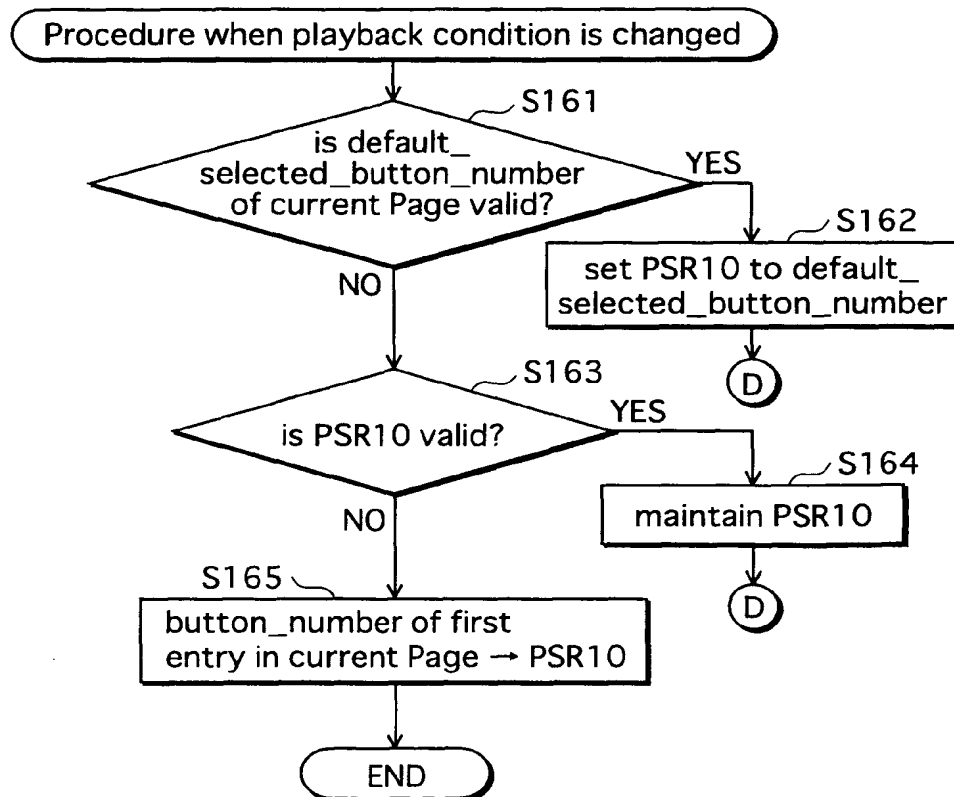


FIG.59

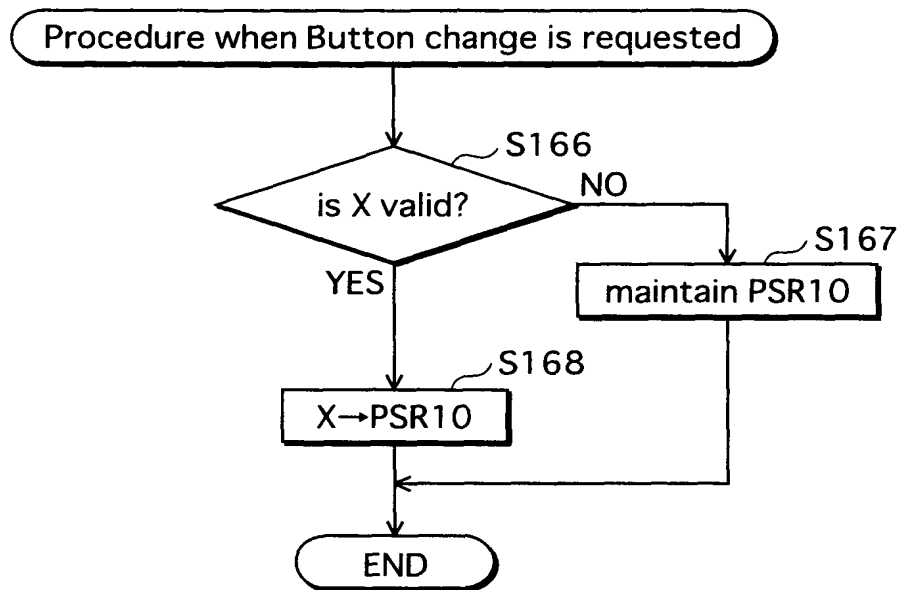

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2004/008830

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> Int.Cl <sup>7</sup> H04N5/93, G11B20/10, 20/12, 27/00, 27/34  According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) Int.Cl <sup>7</sup> H04N5/76-5/956, G11B20/10, 20/12, 27/00, 27/34  Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-2004 Kokai Jitsuyo Shinan Koho 1971-2004 Jitsuyo Shinan Toroku Koho 1996-2004  Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 11-296997 A (Pioneer Electronic Corp.), 29 October, 1999 (29.10.99), Par. Nos. [0289] to [0300]; Fig. 21 & EP 949618 A1 & US 2003/123351 A1	1-12
A	JP 2000-348442 A (Matsushita Electric Industrial Co., Ltd.), 15 December, 2000 (15.12.00), Full text; Figs. 1 to 50 & WO 2000/060597 A1 & EP 1041569 A1 & US 6377747 B1	1-12
P, A	JP 2003-179859 A (Sony Corp.), 27 June, 2003 (27.06.03), Full text; Figs. 1 to 18 & WO 2003/032636 A1 & EP 1434436 A1	1-12
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 04 October, 2004 (04.10.04)		Date of mailing of the international search report 19 October, 2004 (19.10.04)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (January 2004)